

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274674

Luminaire Tested: P3AS20R259830D010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274674
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R259830D010 E3D1WH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 98CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2064.9 lumens
Efficiency: N/A
Efficacy: 75.4 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274674

CATALOG NUMBER: P3AS20R259830D010 E3D1WH

Luminous Intensity Polar Plot

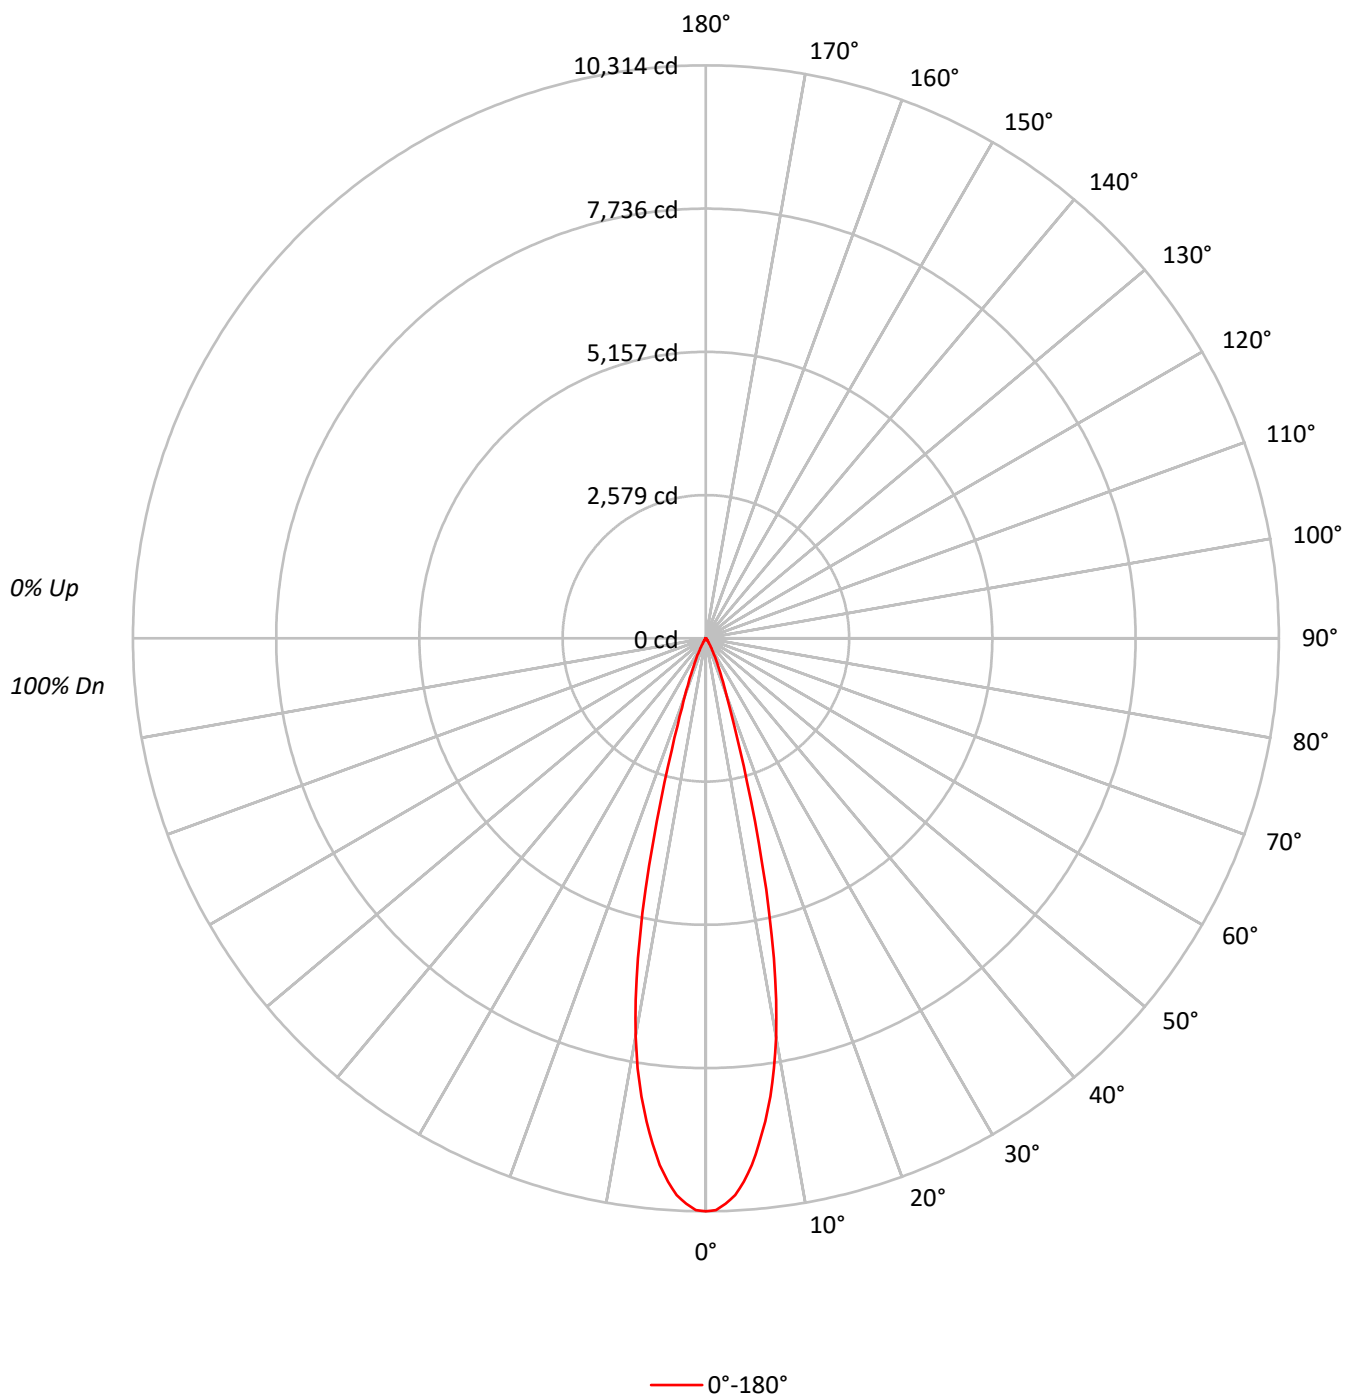

TEST NUMBER: P1274674

CATALOG NUMBER: P3AS20R259830D010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	110	108	107	106	105		104	103	102		100
2	112	108	106	103	110	107	104	102	104	102	100		101	99	98		98
3	109	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	106	101	97	94	104	100	96	94	98	95	92		96	93	91		94
5	103	97	93	91	101	96	93	90	95	92	90		93	91	89		92
6	100	94	90	88	99	94	90	87	92	89	87		91	88	86		90
7	98	92	88	85	97	91	87	85	90	87	84		89	86	84		88
8	95	89	85	83	94	89	85	83	88	85	82		87	84	82		86
9	93	87	83	81	92	86	83	80	86	83	80		85	82	80		84
10	91	85	81	79	90	84	81	79	84	81	78		83	80	78		83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2261551
5°	2095020
10°	1620945
15°	774216
20°	255266
25°	107595
30°	41703
35°	18042
40°	6011
45°	2791
50°	1023
55°	573
60°	307
65°	363
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2791 cd/sqm

TEST NUMBER: P1274674

CATALOG NUMBER: P3AS20R259830D010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	836.6	40.5
10°-20°	951.5	46.1
20°-30°	221.1	10.7
30°-40°	46.4	2.2
40°-50°	7.5	0.4
50°-60°	1.2	0.1
60°-70°	0.6	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2009.2	97.3
0°-40°	2055.6	99.5
0°-60°	2064.3	100.0
0°-90°	2064.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2064.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10314	
5°	9518	837
15°	3410	952
25°	445	221
35°	67	46
45°	9	8
55°	2	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1274674

CATALOG NUMBER: P3AS20R259830D010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	10313.5
1°	10292.6
2°	10185.5
3°	10035.0
4°	9805.2
5°	9517.7
6°	9148.5
7°	8762.2
8°	8328.7
9°	7839.8
10°	7279.8
11°	6630.6
12°	5885.6
13°	5069.5
14°	4216.0
15°	3410.4
16°	2697.6
17°	2101.6
18°	1653.2
19°	1322.2
20°	1093.9
21°	914.2
22°	767.4
23°	640.9
24°	536.1
25°	444.7
27.5°	263.5
30°	164.7
32.5°	105.6
35°	67.4
37.5°	40.4
40°	21.0
42.5°	13.5
45°	9.0
47.5°	5.2
50°	3.0
52.5°	1.5
55°	1.5
57.5°	0.7
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.0
72.5°	0.0



TEST NUMBER: P1274674

CATALOG NUMBER: P3AS20R259830D010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)