

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274779

Luminaire Tested: P3AS20R409830D010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274779
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R409830D010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R40 optic, 3000K CCT AND, 98CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1365.1 lumens
Efficiency: N/A
Efficacy: 49.8 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274779

CATALOG NUMBER: P3AS20R409830D010 E3DLD1WMH

Luminous Intensity Polar Plot

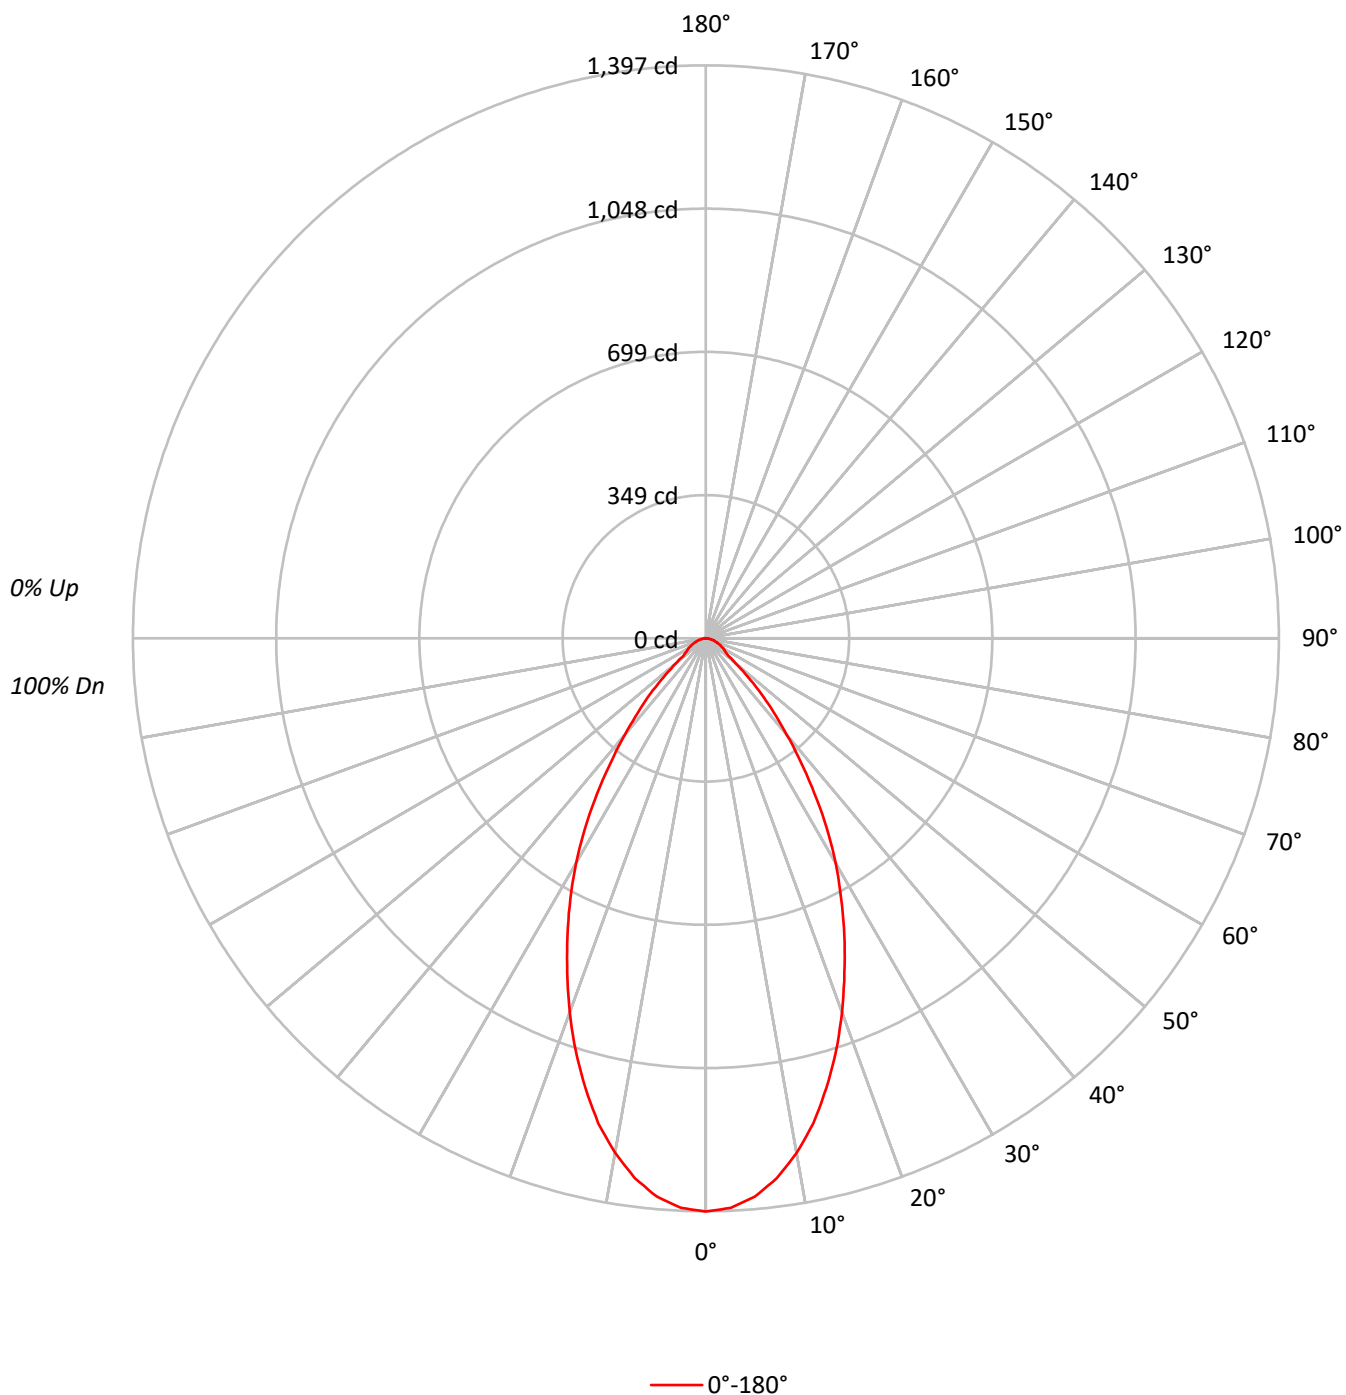

TEST NUMBER: P1274779

CATALOG NUMBER: P3AS20R409830D010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	306423
5°	300858
10°	283606
15°	257595
20°	226306
25°	193245
30°	160075
35°	123460
40°	87879
45°	59200
50°	32306
55°	22785
60°	21446
65°	19821
70°	17631
75°	16860
80°	13512
85°	11573

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 59200 cd/sqm

TEST NUMBER: P1274779

CATALOG NUMBER: P3AS20R409830D010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.5	9.3
10°-20°	316.1	23.2
20°-30°	365.4	26.8
30°-40°	288.0	21.1
40°-50°	147.8	10.8
50°-60°	56.5	4.1
60°-70°	37.4	2.7
70°-80°	20.4	1.5
80°-90°	6.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	808.9	59.3
0°-40°	1096.9	80.4
0°-60°	1301.3	95.3
0°-90°	1365.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1365.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1397	
5°	1367	127
15°	1135	316
25°	799	365
35°	461	288
45°	191	148
55°	60	57
65°	38	37
75°	20	20
85°	5	6
90°	0	

TEST NUMBER: P1274779

CATALOG NUMBER: P3AS20R409830D010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1397.4
2.5°	1389.7
5°	1366.8
7.5°	1327.1
10°	1273.7
12.5°	1211.0
15°	1134.7
17.5°	1055.3
20°	969.8
22.5°	882.7
25°	798.7
27.5°	714.7
30°	632.2
32.5°	548.3
35°	461.2
37.5°	380.3
40°	307.0
42.5°	244.3
45°	190.9
47.5°	139.0
50°	94.7
52.5°	68.7
55°	59.6
57.5°	53.5
60°	48.9
62.5°	42.8
65°	38.2
67.5°	32.1
70°	27.5
72.5°	22.9
75°	19.9
77.5°	15.3
80°	10.7
82.5°	9.2
85°	4.6
87.5°	3.1
90°	0.0

(END OF REPORT)