

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274784

Luminaire Tested: P3AS20R409830D010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274784
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R409830D010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R40 optic, 3000K CCT AND, 98CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1779.0 lumens
Efficiency: N/A
Efficacy: 64.9 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274784

CATALOG NUMBER: P3AS20R409830D010 E3DLP1WH

Luminous Intensity Polar Plot

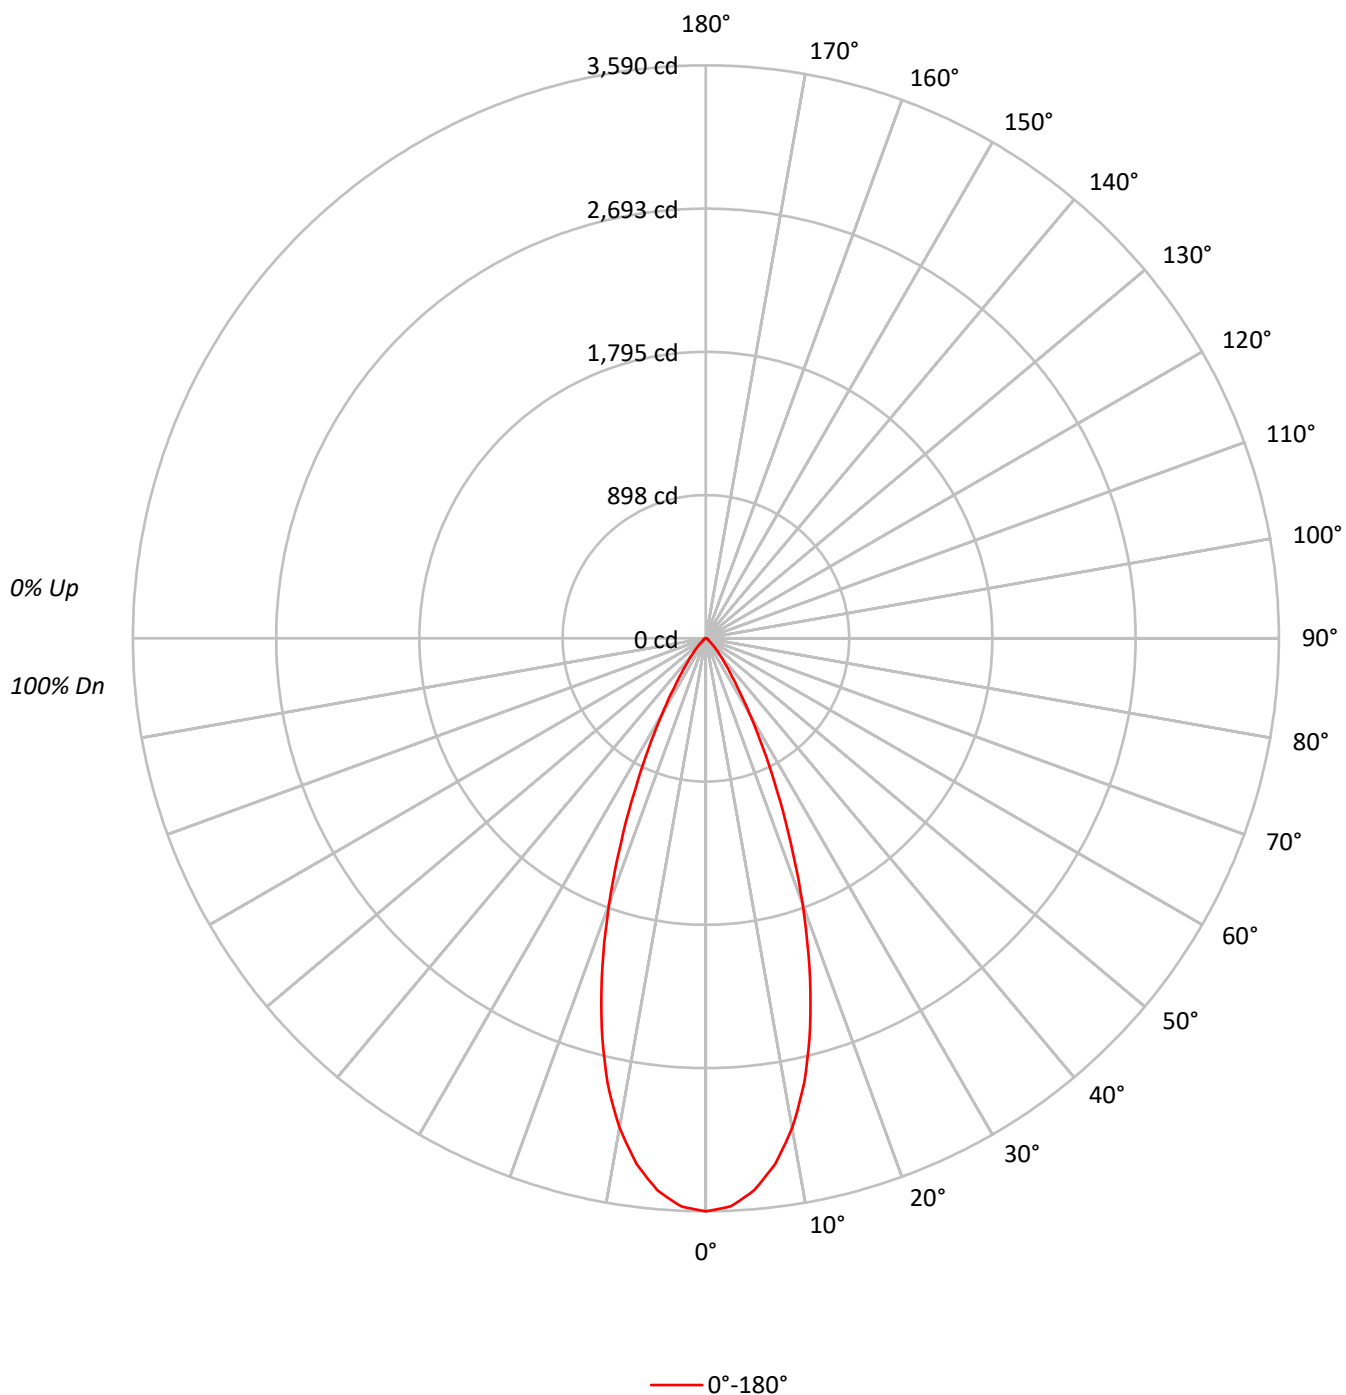

TEST NUMBER: P1274784

CATALOG NUMBER: P3AS20R409830D010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	99	94	91	102	97	93	90	95	91	88		92	89	87		90
4	100	93	88	85	98	92	88	84	90	86	83		88	85	82		86
5	96	88	83	79	94	88	83	79	86	82	78		84	81	78		83
6	92	84	79	75	91	83	78	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	68	84	76	71	67	75	70	67		74	70	67		73
9	82	73	68	64	81	73	68	64	72	67	64		71	67	64		70
10	78	70	65	62	78	70	65	61	69	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	787196
5°	764317
10°	693597
15°	573011
20°	413339
25°	255668
30°	138426
35°	71527
40°	38901
45°	21770
50°	10951
55°	8181
60°	7368
65°	7108
70°	6860
75°	6439
80°	5809
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21770 cd/sqm

TEST NUMBER: P1274784

CATALOG NUMBER: P3AS20R409830D010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	320.1	18.0
10°-20°	687.3	38.6
20°-30°	490.5	27.6
30°-40°	180.6	10.1
40°-50°	56.8	3.2
50°-60°	19.8	1.1
60°-70°	13.6	0.8
70°-80°	8.1	0.5
80°-90°	2.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1497.9	84.2
0°-40°	1678.4	94.3
0°-60°	1755.1	98.7
0°-90°	1779.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1779.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3590	
5°	3472	320
15°	2524	687
25°	1057	490
35°	267	181
45°	70	57
55°	21	20
65°	14	14
75°	8	8
85°	2	2
90°	0	

TEST NUMBER: P1274784

CATALOG NUMBER: P3AS20R409830D010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3589.9
2.5°	3562.4
5°	3472.3
7.5°	3322.7
10°	3115.0
12.5°	2850.8
15°	2524.1
17.5°	2157.6
20°	1771.3
22.5°	1391.1
25°	1056.7
27.5°	775.7
30°	546.7
32.5°	383.3
35°	267.2
37.5°	189.3
40°	135.9
42.5°	97.7
45°	70.2
47.5°	47.3
50°	32.1
52.5°	22.9
55°	21.4
57.5°	19.9
60°	16.8
62.5°	15.3
65°	13.7
67.5°	12.2
70°	10.7
72.5°	9.2
75°	7.6
77.5°	6.1
80°	4.6
82.5°	3.1
85°	1.5
87.5°	1.5
90°	0.0

(END OF REPORT)