

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274834

Luminaire Tested: P3AS20R509830D010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274834
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R509830D010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R50 optic, 3000K CCT AND, 98CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 553.0 lumens
Efficiency: N/A
Efficacy: 20.2 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274834

CATALOG NUMBER: P3AS20R509830D010 E3DLP1GPH

Luminous Intensity Polar Plot

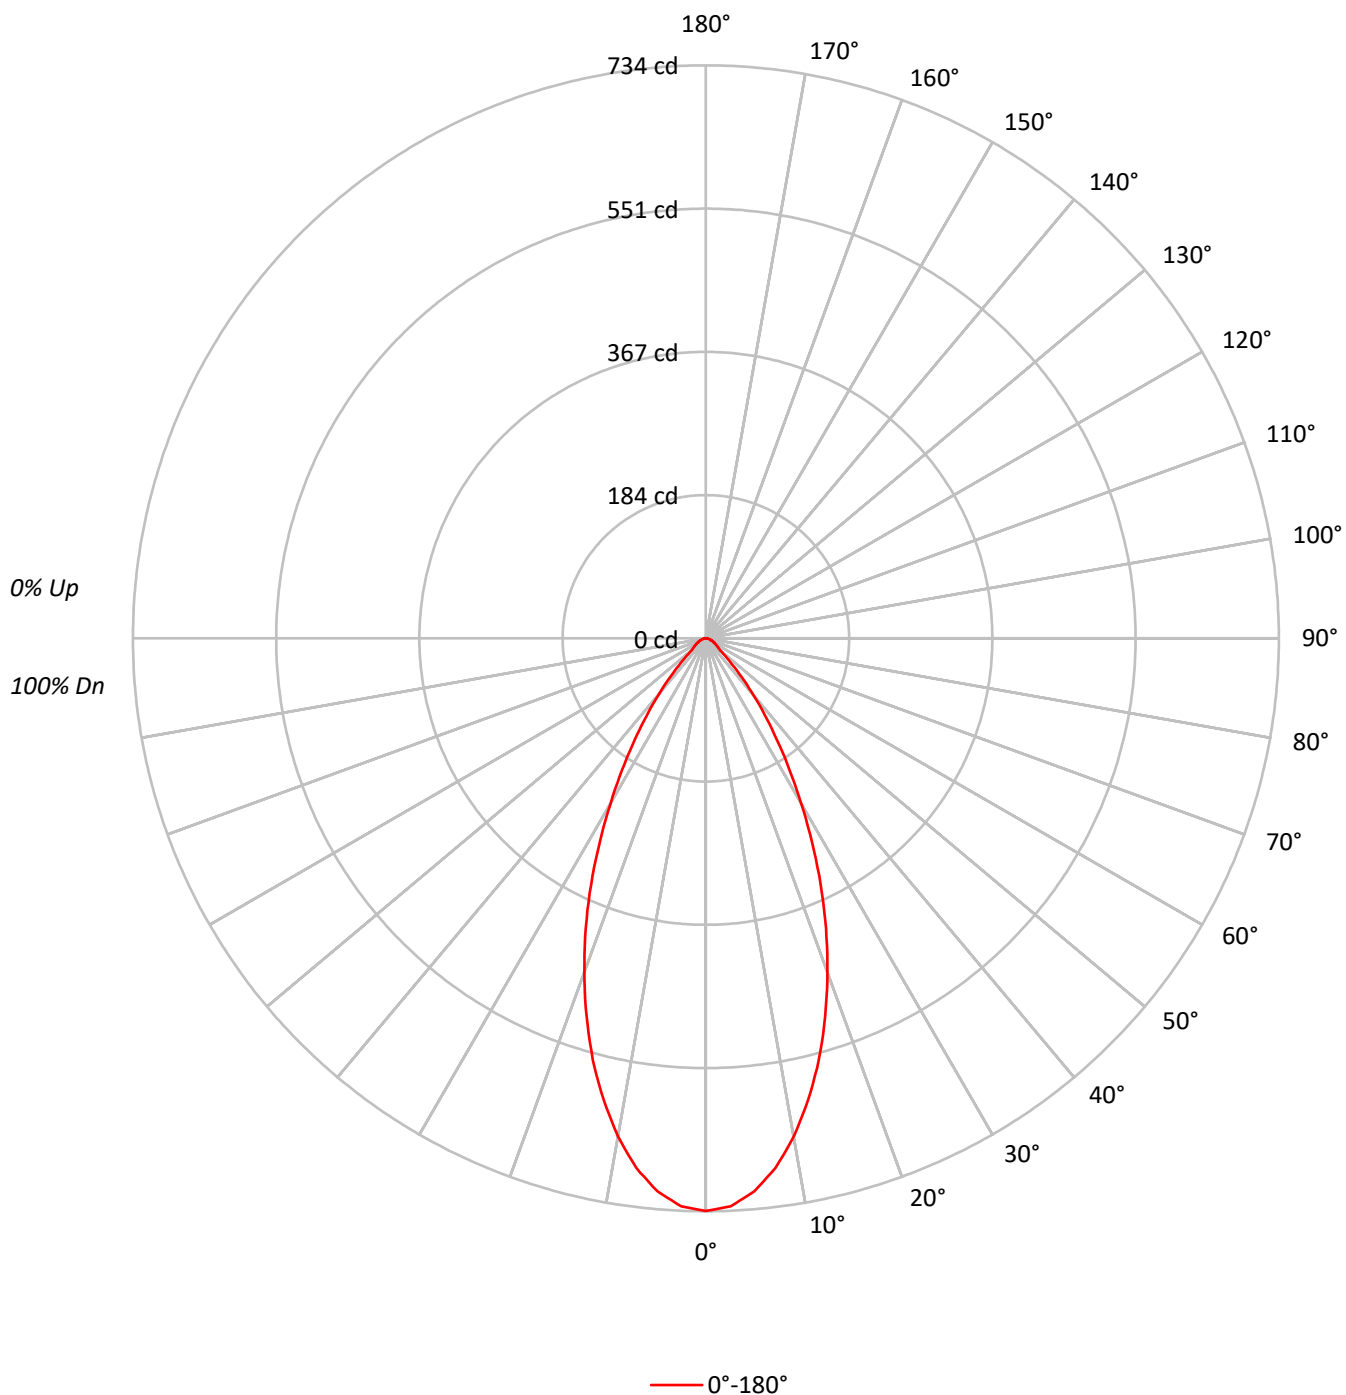

TEST NUMBER: P1274834

CATALOG NUMBER: P3AS20R509830D010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	85	91	87	83		88	85	82		86
4	96	88	82	78	94	87	82	78	85	80	77		83	79	76		81
5	91	83	76	72	90	82	76	72	80	75	71		78	74	70		77
6	87	77	71	67	85	77	71	67	75	70	66		74	69	66		72
7	82	73	67	62	81	72	66	62	71	66	62		70	65	61		68
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		65
9	75	65	59	55	74	64	59	55	63	58	55		63	58	54		62
10	71	61	56	52	70	61	55	52	60	55	51		59	55	51		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	160842
5°	156504
10°	144330
15°	126925
20°	106199
25°	84198
30°	61782
35°	42483
40°	26993
45°	15071
50°	8187
55°	6881
60°	5921
65°	5448
70°	4809
75°	4406
80°	3788
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15071 cd/sqm

TEST NUMBER: P1274834

CATALOG NUMBER: P3AS20R509830D010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.9	11.9
10°-20°	154.8	28.0
20°-30°	158.4	28.6
30°-40°	100.4	18.2
40°-50°	39.9	7.2
50°-60°	16.2	2.9
60°-70°	10.4	1.9
70°-80°	5.3	1.0
80°-90°	1.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	379.1	68.6
0°-40°	479.5	86.7
0°-60°	535.7	96.9
0°-90°	553.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	553.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	734	
5°	711	66
15°	559	155
25°	348	158
35°	159	100
45°	49	40
55°	18	16
65°	10	10
75°	5	5
85°	2	2
90°	0	

TEST NUMBER: P1274834

CATALOG NUMBER: P3AS20R509830D010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	733.5
2.5°	728.2
5°	711.0
7.5°	684.1
10°	648.2
12.5°	605.5
15°	559.1
17.5°	508.2
20°	455.1
22.5°	401.9
25°	348.0
27.5°	294.1
30°	244.0
32.5°	199.1
35°	158.7
37.5°	124.2
40°	94.3
42.5°	69.6
45°	48.6
47.5°	32.9
50°	24.0
52.5°	20.2
55°	18.0
57.5°	15.7
60°	13.5
62.5°	12.0
65°	10.5
67.5°	9.0
70°	7.5
72.5°	6.0
75°	5.2
77.5°	3.7
80°	3.0
82.5°	2.2
85°	1.5
87.5°	0.7
90°	0.0

(END OF REPORT)