

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274843

Luminaire Tested: P3AS20R559830D010 E3CD1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274843
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R559830D010 E3CD1MB
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 98CRI , E3CD1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2033.0 lumens
Efficiency: N/A
Efficacy: 74.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274843
CATALOG NUMBER: P3AS20R559830D010 E3CD1MB

Luminous Intensity Polar Plot

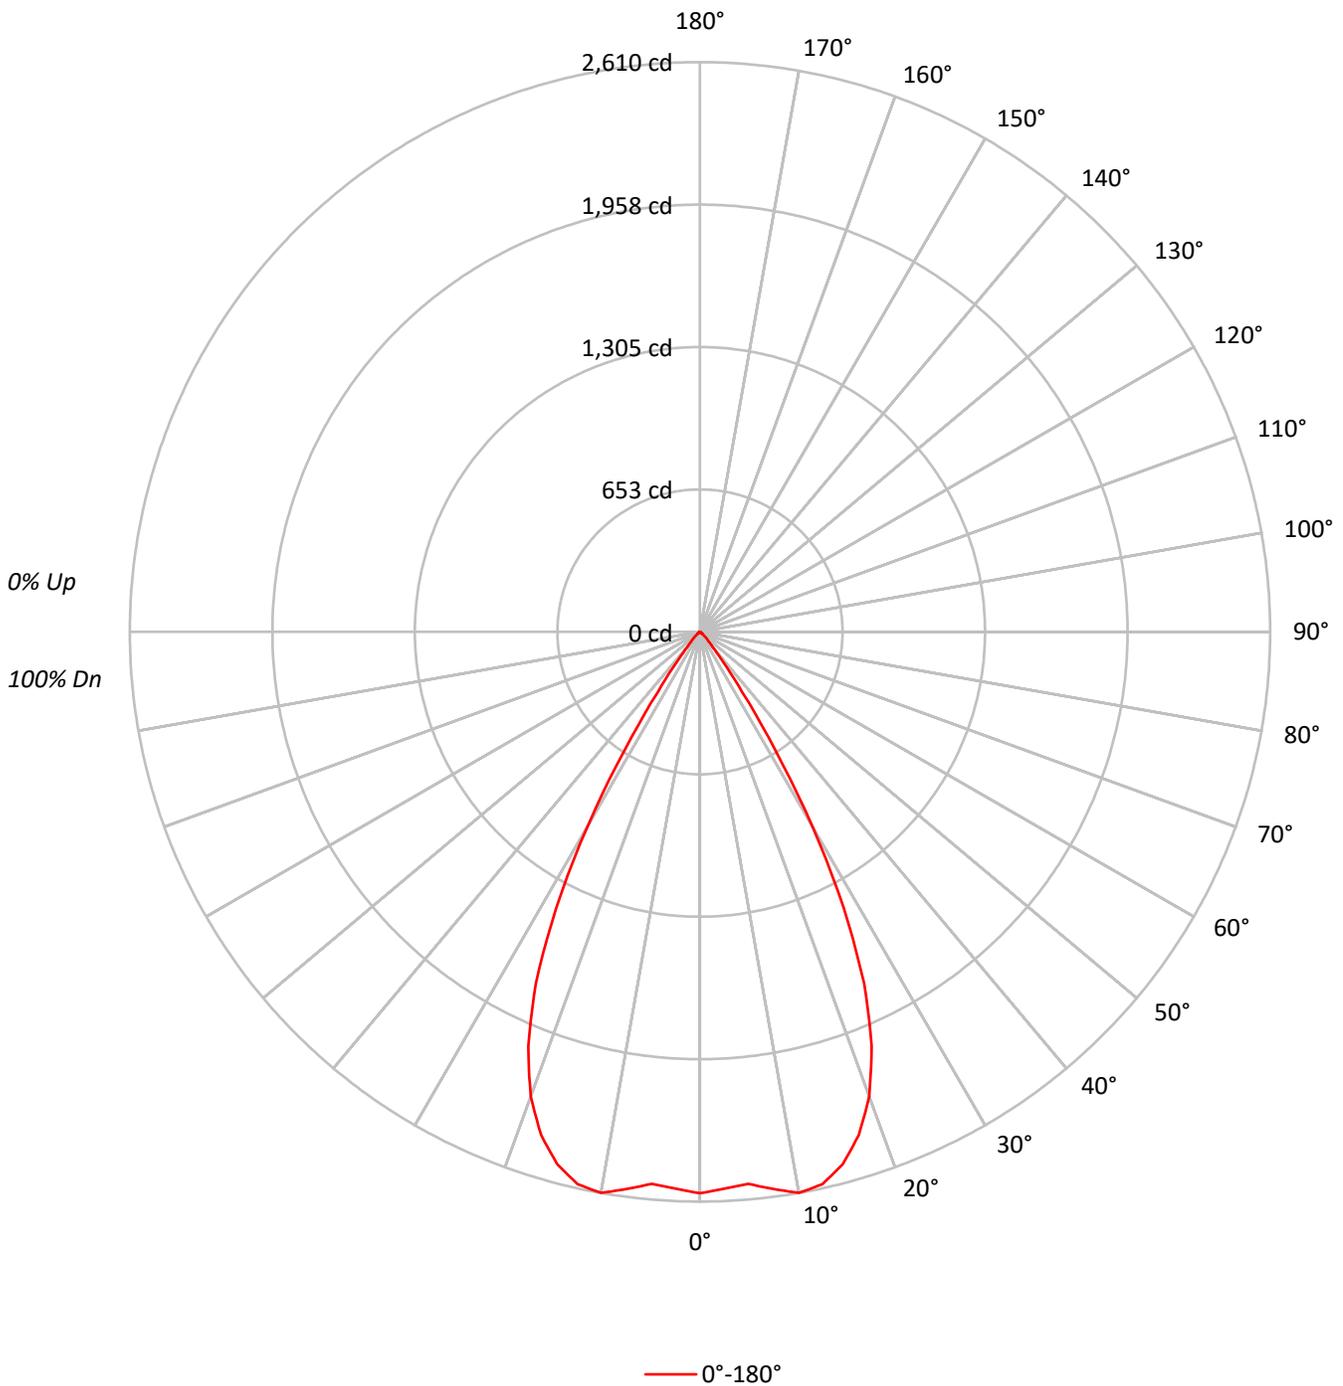



TEST NUMBER: P1274843
 CATALOG NUMBER: P3AS20R559830D010 E3CD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94			
2	109	104	101	98	107	103	99	96	100	97	94	97	94	92	94	92	90	89			
3	104	98	94	90	102	97	93	89	94	91	88	92	89	86	90	87	85	84			
4	99	92	87	84	98	91	87	83	89	85	82	87	84	81	85	83	80	79			
5	95	87	82	78	93	86	81	78	85	80	77	83	79	76	82	78	76	74			
6	91	83	77	73	89	82	77	73	80	76	72	79	75	72	78	74	72	70			
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66			
8	83	74	69	65	82	74	68	65	73	68	65	72	67	64	71	67	64	63			
9	79	71	65	61	78	70	65	61	69	64	61	68	64	61	68	64	61	60			
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	563858
5°	558616
10°	581062
15°	573011
20°	528383
25°	429920
30°	261129
35°	90400
40°	25791
45°	12311
50°	5219
55°	2332
60°	2675
65°	2387
70°	1988
75°	2626
80°	1894
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12311 cd/sqm



TEST NUMBER: P1274843
 CATALOG NUMBER: P3AS20R559830D010 E3CD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	245.3	12.1
10°-20°	701.5	34.5
20°-30°	782.1	38.5
30°-40°	255.8	12.6
40°-50°	33.7	1.7
50°-60°	7.1	0.4
60°-70°	4.2	0.2
70°-80°	2.6	0.1
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1728.9	85.0
0°-40°	1984.7	97.6
0°-60°	2025.6	99.6
0°-90°	2033.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2033.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2571	
5°	2538	245
15°	2524	702
25°	1777	782
35°	338	256
45°	40	34
55°	6	7
65°	5	4
75°	3	3
85°	0	1
90°	0	



TEST NUMBER: P1274843
CATALOG NUMBER: P3AS20R559830D010 E3CD1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	2571.4
2.5°	2553.1
5°	2537.8
7.5°	2574.5
10°	2609.6
12.5°	2591.3
15°	2524.1
17.5°	2417.1
20°	2264.3
22.5°	2053.5
25°	1776.9
27.5°	1425.5
30°	1031.3
32.5°	632.5
35°	337.7
37.5°	171.1
40°	90.1
42.5°	58.1
45°	39.7
47.5°	27.5
50°	15.3
52.5°	9.2
55°	6.1
57.5°	6.1
60°	6.1
62.5°	4.6
65°	4.6
67.5°	3.1
70°	3.1
72.5°	3.1
75°	3.1
77.5°	1.5
80°	1.5
82.5°	1.5
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)