

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274888

Luminaire Tested: P3AS20R609830D010 E3DLD1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274888
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R609830D010 E3DLD1LI
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 98CRI , E3DLD1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1259.0 lumens
Efficiency: N/A
Efficacy: 46.0 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274888

CATALOG NUMBER: P3AS20R609830D010 E3DLD1LI

Luminous Intensity Polar Plot

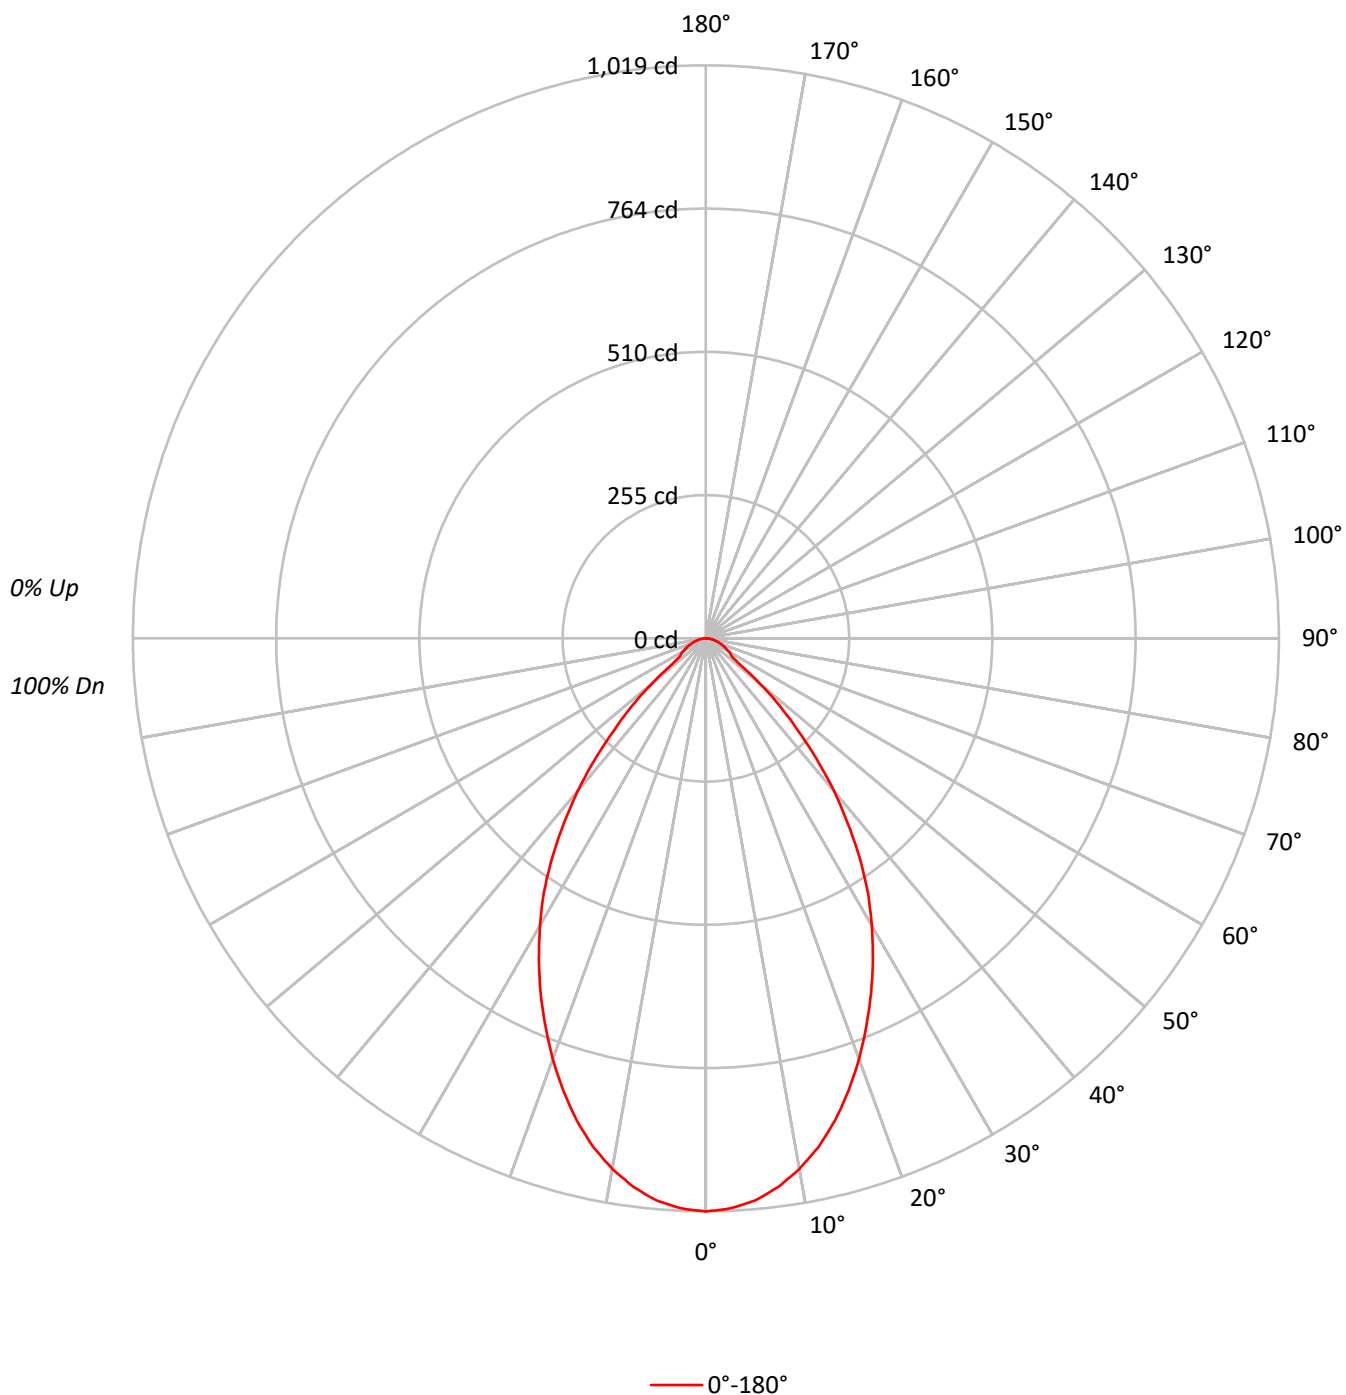

TEST NUMBER: P1274888

CATALOG NUMBER: P3AS20R609830D010 E3DLD1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82	78	76	74
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76	72	69	67
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71	66	63	61
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61	57	53	51
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58	53	49	47
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54	49	45	44
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51	46	42	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	223491
5°	220977
10°	213334
15°	201545
20°	185773
25°	168227
30°	149339
35°	127609
40°	101476
45°	71542
50°	42745
55°	21600
60°	20788
65°	19042
70°	17631
75°	16860
80°	15406
85°	11573

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 71542 cd/sqm

TEST NUMBER: P1274888

CATALOG NUMBER: P3AS20R609830D010 E3DLD1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.3	7.5
10°-20°	248.1	19.7
20°-30°	318.6	25.3
30°-40°	295.4	23.5
40°-50°	179.8	14.3
50°-60°	59.9	4.8
60°-70°	36.5	2.9
70°-80°	20.6	1.6
80°-90°	5.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	661.0	52.5
0°-40°	956.4	76.0
0°-60°	1196.2	95.0
0°-90°	1259.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1259.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1019	
5°	1004	94
15°	888	248
25°	695	319
35°	477	295
45°	231	180
55°	56	60
65°	37	36
75°	20	21
85°	5	6
90°	0	

TEST NUMBER: P1274888

CATALOG NUMBER: P3AS20R609830D010 E3DLD1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1019.2
2.5°	1014.6
5°	1003.9
7.5°	984.1
10°	958.1
12.5°	926.0
15°	887.8
17.5°	843.5
20°	796.1
22.5°	745.7
25°	695.3
27.5°	643.3
30°	589.8
32.5°	536.3
35°	476.7
37.5°	414.1
40°	354.5
42.5°	291.9
45°	230.7
47.5°	178.8
50°	125.3
52.5°	74.9
55°	56.5
57.5°	52.0
60°	47.4
62.5°	41.3
65°	36.7
67.5°	32.1
70°	27.5
72.5°	22.9
75°	19.9
77.5°	15.3
80°	12.2
82.5°	7.6
85°	4.6
87.5°	3.1
90°	0.0

(END OF REPORT)