

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1274896

Luminaire Tested: P3AS20R609830D010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1274896
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R609830D010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 98CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1607.0 lumens
Efficiency: N/A
Efficacy: 58.6 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1274896
CATALOG NUMBER: P3AS20R609830D010 E3DLP1WH

Luminous Intensity Polar Plot

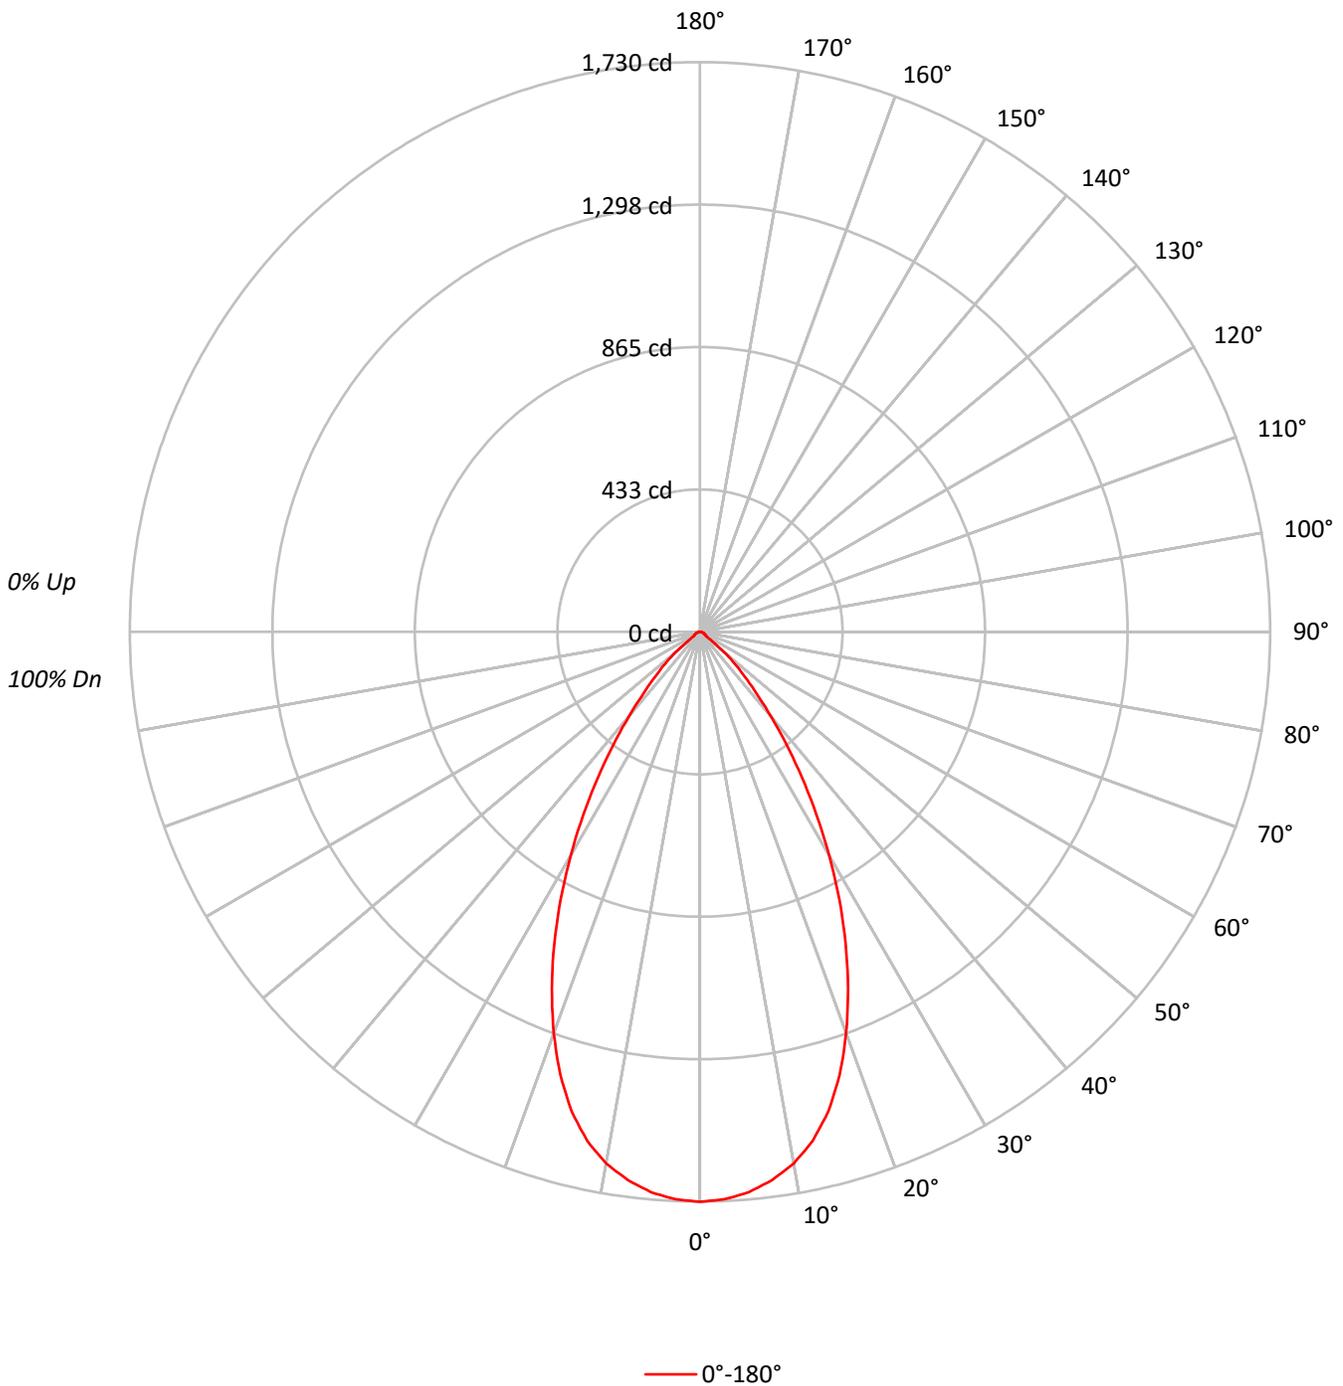



TEST NUMBER: P1274896
 CATALOG NUMBER: P3AS20R609830D010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79				79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73				73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68				68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59				59
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55				55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51				51
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48				48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	379465
5°	375874
10°	364923
15°	341886
20°	302590
25°	253128
30°	198385
35°	143911
40°	95751
45°	59665
50°	32306
55°	9328
60°	8727
65°	7939
70°	7822
75°	7795
80°	7703
85°	7799

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 59665 cd/sqm



TEST NUMBER: P1274896
 CATALOG NUMBER: P3AS20R609830D010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.8	10.0
10°-20°	417.8	26.0
20°-30°	476.2	29.6
30°-40°	337.7	21.0
40°-50°	153.2	9.5
50°-60°	32.5	2.0
60°-70°	15.7	1.0
70°-80°	9.7	0.6
80°-90°	3.3	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1054.8	65.6
0°-40°	1392.6	86.7
0°-60°	1578.3	98.2
0°-90°	1607.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1607.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1730	
5°	1708	161
15°	1506	418
25°	1046	476
35°	538	338
45°	192	153
55°	24	33
65°	15	16
75°	9	10
85°	3	3
90°	0	



TEST NUMBER: P1274896
CATALOG NUMBER: P3AS20R609830D010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1730.5
2.5°	1724.4
5°	1707.6
7.5°	1678.6
10°	1638.9
12.5°	1582.3
15°	1506.0
17.5°	1409.8
20°	1296.7
22.5°	1174.5
25°	1046.2
27.5°	914.9
30°	783.5
32.5°	658.3
35°	537.6
37.5°	430.7
40°	334.5
42.5°	253.5
45°	192.4
47.5°	143.6
50°	94.7
52.5°	44.3
55°	24.4
57.5°	21.4
60°	19.9
62.5°	18.3
65°	15.3
67.5°	13.7
70°	12.2
72.5°	10.7
75°	9.2
77.5°	7.6
80°	6.1
82.5°	4.6
85°	3.1
87.5°	1.5
90°	0.0

(END OF REPORT)