

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275068

Luminaire Tested: P3AS02R309835DE010 E3DLP1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275068
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R309835DE010 E3DLP1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 98CRI , E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 120.0 lumens
Efficiency: N/A
Efficacy: 33.3 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275068

CATALOG NUMBER: P3AS02R309835DE010 E3DLP1MW

Luminous Intensity Polar Plot

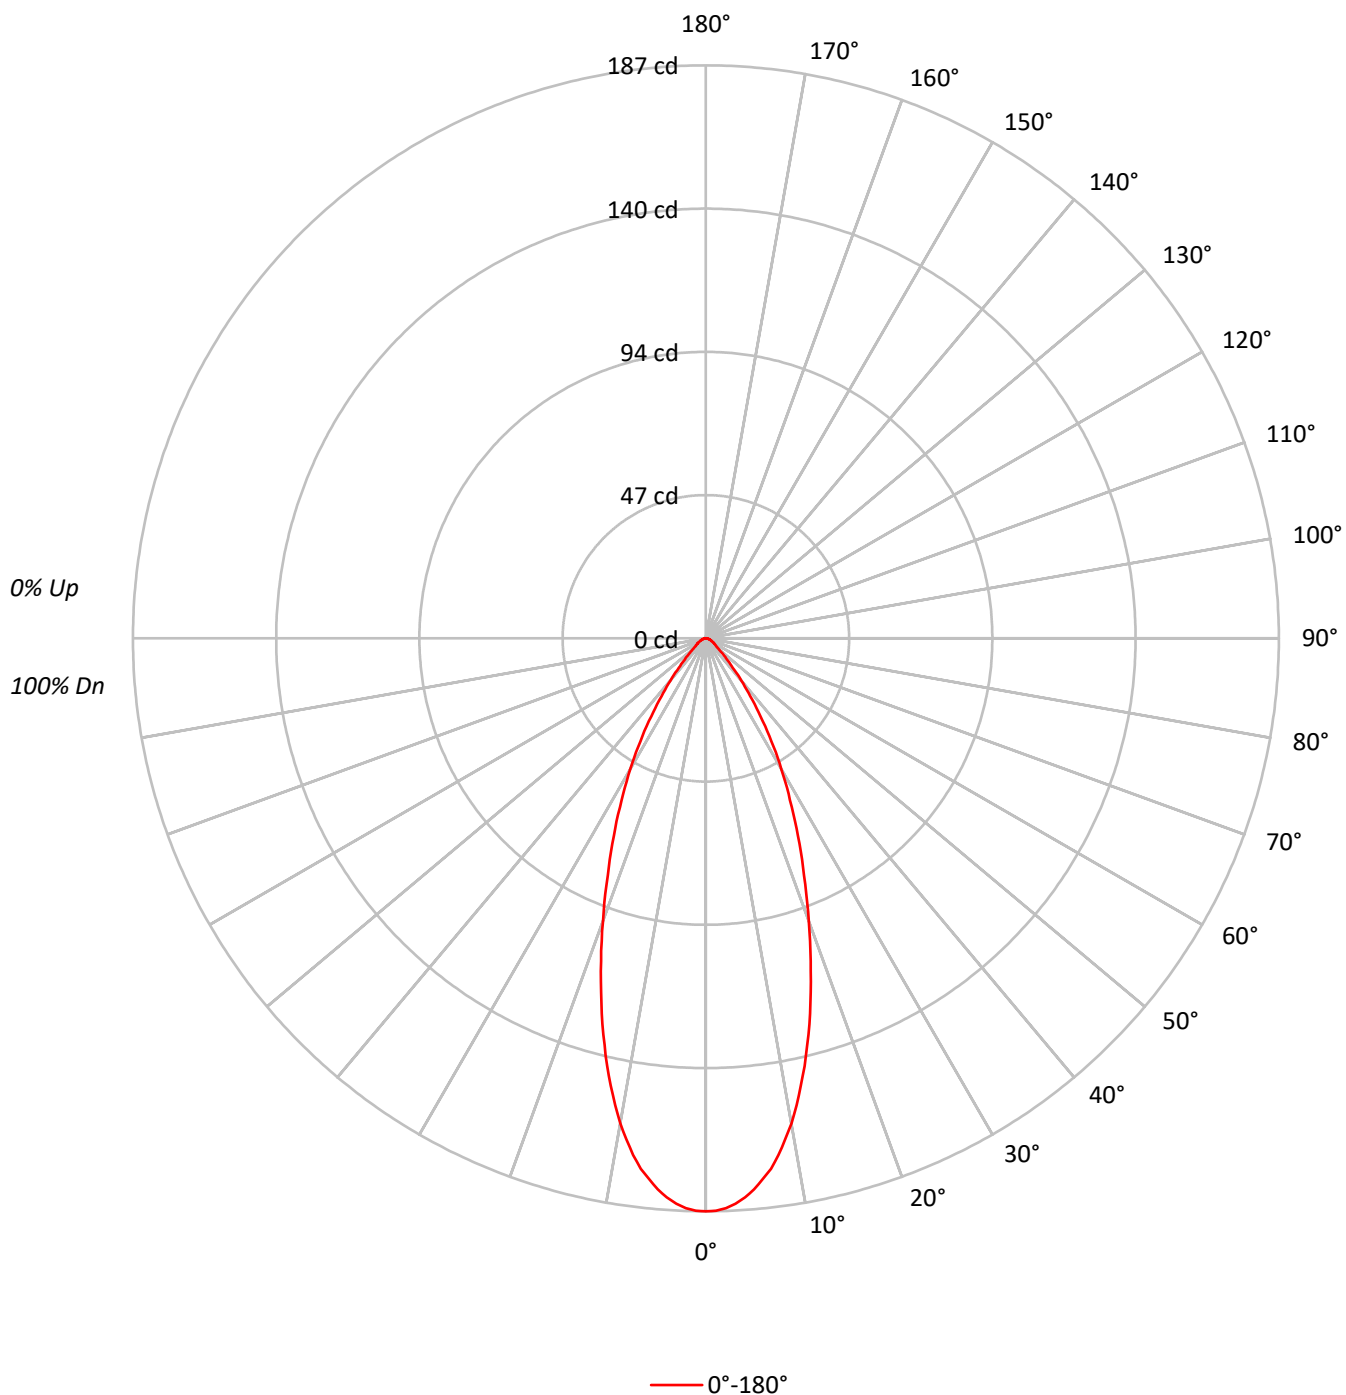

TEST NUMBER: P1275068

CATALOG NUMBER: P3AS02R309835DE010 E3DLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	73	90	83	77	73	81	76	72		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	74	68	64	72	67	63		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67
9	76	67	61	57	75	66	60	57	65	60	56		64	60	56		63
10	73	63	58	54	72	63	57	54	62	57	53		61	57	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	41005
5°	39731
10°	35804
15°	29603
20°	22915
25°	17203
30°	12483
35°	8325
40°	5124
45°	3008
50°	1842
55°	1491
60°	1316
65°	1038
70°	962
75°	932
80°	758
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3008 cd/sqm

TEST NUMBER: P1275068

CATALOG NUMBER: P3AS02R309835DE010 E3DLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	16.6	13.8
10°-20°	35.9	29.9
20°-30°	32.7	27.2
30°-40°	19.8	16.5
40°-50°	7.9	6.6
50°-60°	3.5	2.9
60°-70°	2.1	1.8
70°-80°	1.1	1.0
80°-90°	0.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	85.2	71.0
0°-40°	105.0	87.5
0°-60°	116.4	97.0
0°-90°	120.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	120.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	187	
5°	180	17
15°	130	36
25°	71	33
35°	31	20
45°	10	8
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1275068

CATALOG NUMBER: P3AS02R309835DE010 E3DLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	187.0
1°	186.8
2°	186.1
3°	184.8
4°	182.9
5°	180.5
6°	177.5
7°	174.4
8°	170.3
9°	165.6
10°	160.8
11°	155.2
12°	149.2
13°	143.3
14°	136.8
15°	130.4
17.5°	113.9
20°	98.2
22.5°	83.7
25°	71.1
27.5°	59.5
30°	49.3
32.5°	39.8
35°	31.1
37.5°	23.8
40°	17.9
42.5°	13.0
45°	9.7
47.5°	7.3
50°	5.4
52.5°	4.3
55°	3.9
57.5°	3.3
60°	3.0
62.5°	2.4
65°	2.0
67.5°	1.9
70°	1.5
72.5°	1.3
75°	1.1
77.5°	0.9
80°	0.6
82.5°	0.4
85°	0.4
87.5°	0.2



TEST NUMBER: P1275068
CATALOG NUMBER: P3AS02R309835DE010 E3DLP1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)