

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275163

Luminaire Tested: P3AS02R509835DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275163
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R509835DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R50 optic, 3500K CCT AND, 98CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 259.0 lumens
Efficiency: N/A
Efficacy: 71.9 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275163

CATALOG NUMBER: P3AS02R509835DE010 E3D1LI

Luminous Intensity Polar Plot

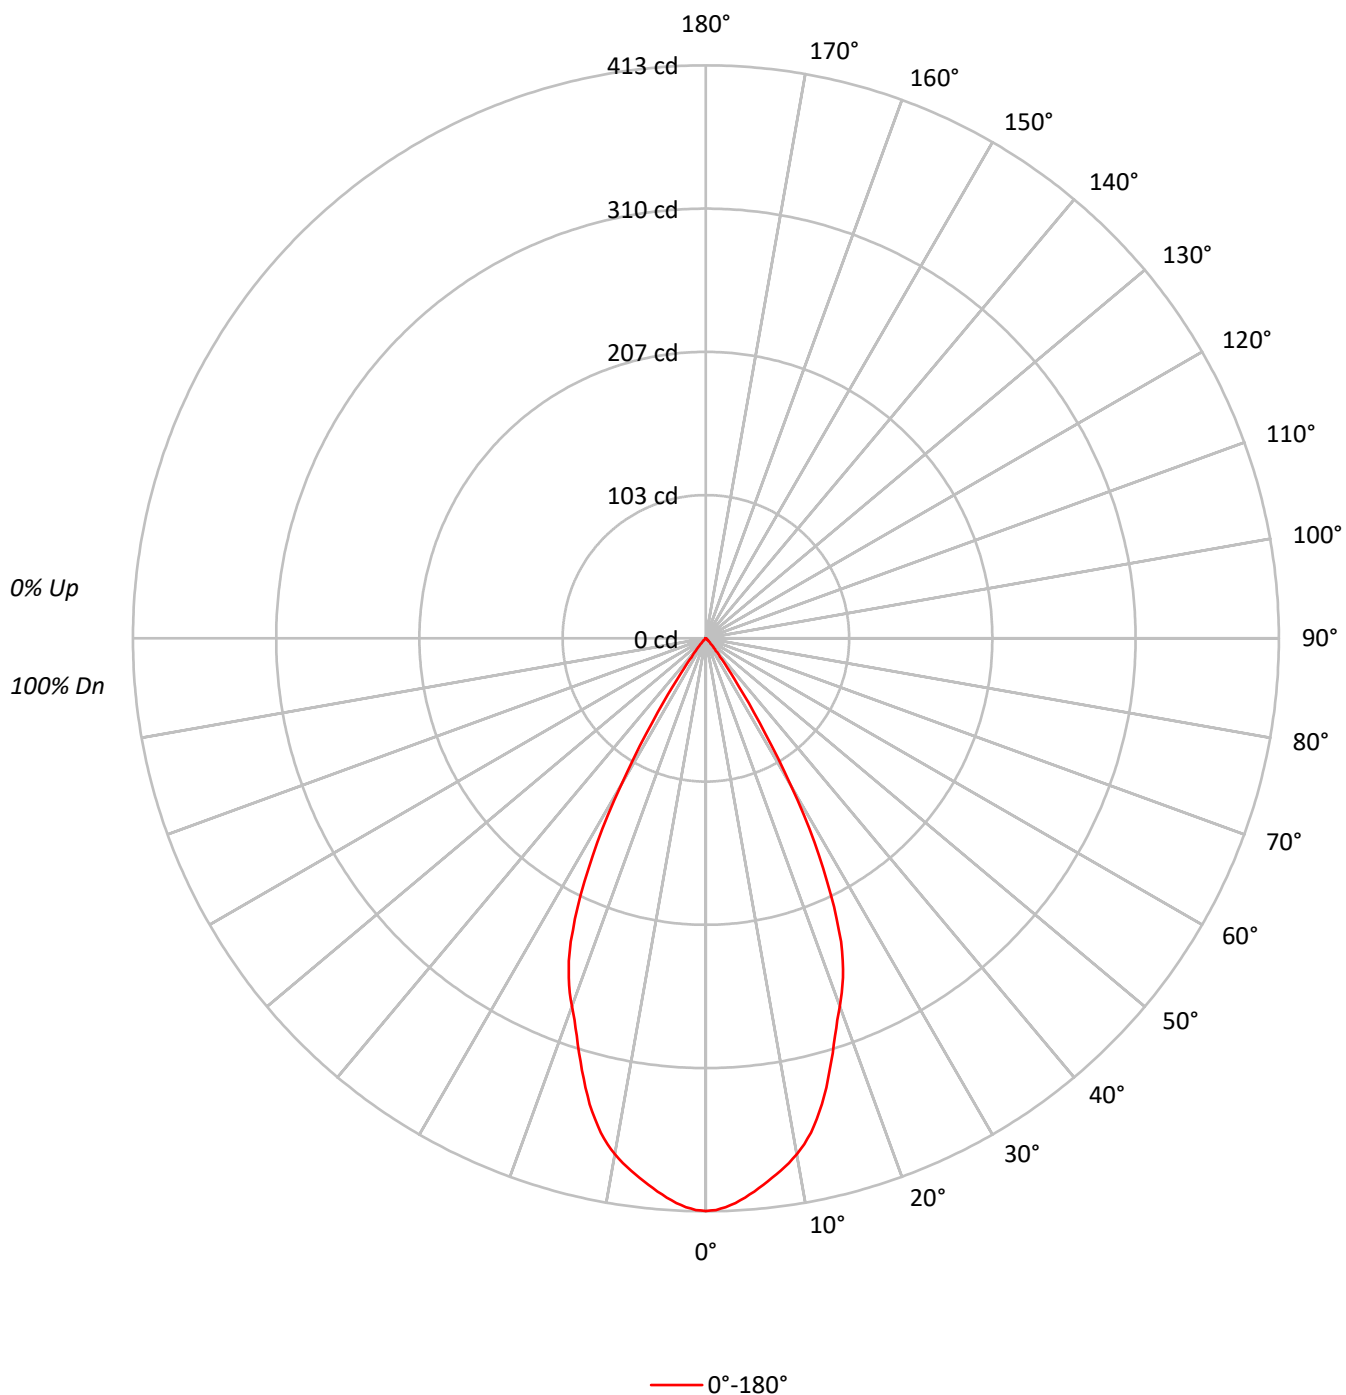

TEST NUMBER: P1275163

CATALOG NUMBER: P3AS02R509835DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	109	107		112	110	108	106		105	104	102		102	101	99		98	97	97
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	93	91
3	105	99	95	91		103	98	94	90		95	92	89		93	90	88		91	88	86
4	100	94	89	85		99	92	88	85		90	87	84		88	85	83		87	84	82
5	96	89	84	80		94	88	83	79		86	82	79		84	81	78		83	80	77
6	92	84	79	75		91	83	78	75		82	78	74		81	77	74		79	76	73
7	88	80	75	71		87	79	74	71		78	74	70		77	73	70		76	72	70
8	84	76	71	67		83	76	71	67		75	70	67		74	69	66		73	69	66
9	81	73	67	64		80	72	67	64		71	67	63		70	66	63		70	66	63
10	78	69	64	61		77	69	64	61		68	64	60		67	63	60		67	63	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	90519
5°	88091
10°	84078
15°	76118
20°	65852
25°	54003
30°	31017
35°	9637
40°	2576
45°	899
50°	205
55°	76
60°	44
65°	52
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 899 cd/sqm

TEST NUMBER: P1275163

CATALOG NUMBER: P3AS02R509835DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.5	14.5
10°-20°	92.9	35.9
20°-30°	97.6	37.7
30°-40°	27.9	10.8
40°-50°	2.7	1.0
50°-60°	0.2	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	228.0	88.0
0°-40°	256.0	98.8
0°-60°	258.9	100.0
0°-90°	259.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	259.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	413	
5°	400	37
15°	335	93
25°	223	98
35°	36	28
45°	3	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1275163

CATALOG NUMBER: P3AS02R509835DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	412.8
1°	412.1
2°	410.3
3°	407.6
4°	404.1
5°	400.2
6°	396.1
7°	391.7
8°	387.6
9°	382.9
10°	377.6
11°	371.5
12°	364.4
13°	355.6
14°	346.1
15°	335.3
16°	323.8
17°	312.6
18°	301.2
19°	291.1
20°	282.2
21°	273.6
22°	263.8
23°	252.6
24°	239.4
25°	223.2
26°	205.7
27°	186.1
28°	166.7
29°	145.7
30°	122.5
31°	100.9
32°	81.0
32.5°	72.3
33°	63.5
34°	48.7
35°	36.0
36°	26.4
37°	19.6
37.5°	17.0
38°	14.7
39°	11.4
40°	9.0
42.5°	5.1
45°	2.9



TEST NUMBER: P1275163

CATALOG NUMBER: P3AS02R509835DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	1.6
50°	0.6
52.5°	0.3
55°	0.2
57.5°	0.2
60°	0.1
62.5°	0.1
65°	0.1
67.5°	0.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)