

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275175

Luminaire Tested: P3AS02R509835DE010 E3DLD1LI

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1275175  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R509835DE010 E3DLD1LI  
Description: 3in Adjustable LED luminaire with, R50 optic, 3500K CCT AND, 98CRI , E3DLD1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 163.0 lumens  
Efficiency: N/A  
Efficacy: 45.3 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 3.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1275175  
CATALOG NUMBER: P3AS02R509835DE010 E3DLD1LI

### Luminous Intensity Polar Plot

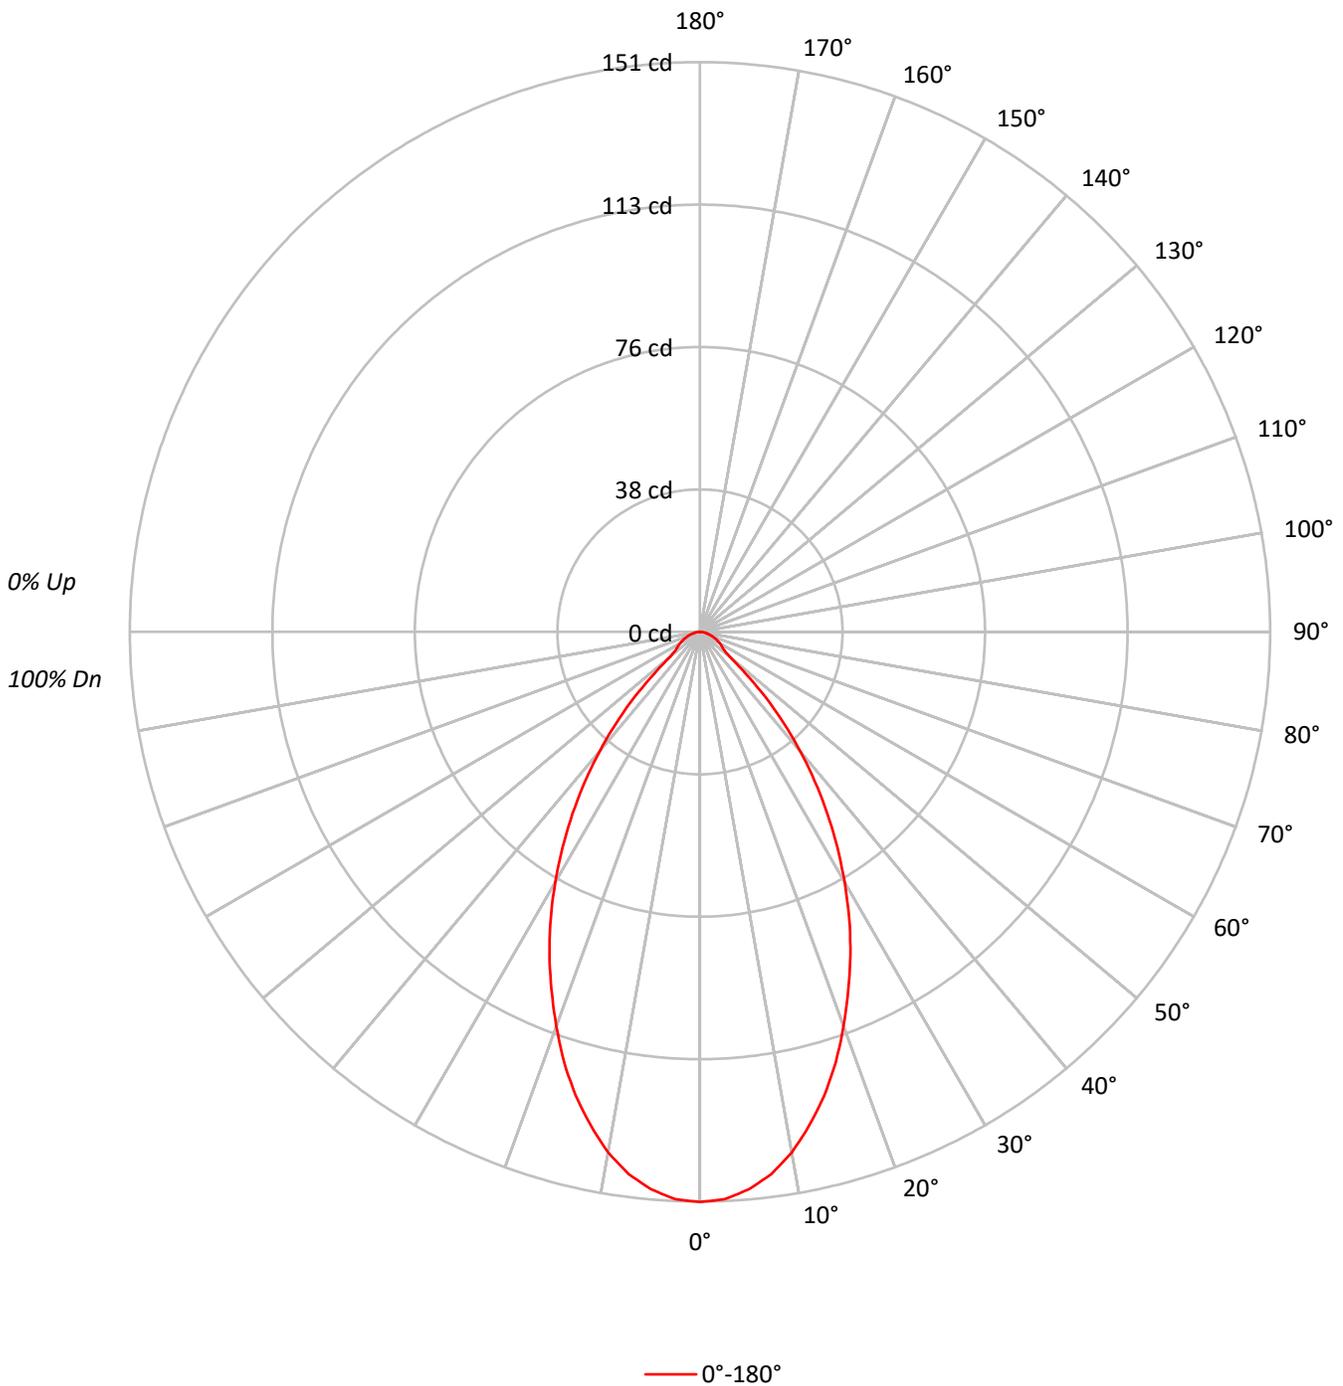



TEST NUMBER: P1275175  
 CATALOG NUMBER: P3AS02R509835DE010 E3DLD1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	83			83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			75
4	93	85	78	73	91	83	77	73	81	76	72	79	75	71	77	73	70	69			69
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63			63
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58			58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	53			53
8	74	63	57	52	73	63	56	52	61	56	52	60	55	51	59	55	51	50			50
9	70	59	53	48	69	59	52	48	58	52	48	57	52	48	56	51	48	46			46
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43			43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	33133
5°	32644
10°	31195
15°	28876
20°	25949
25°	22816
30°	19395
35°	15740
40°	11822
45°	7629
50°	3616
55°	2829
60°	2675
65°	2491
70°	2244
75°	2033
80°	1894
85°	1761

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7629 cd/sqm



TEST NUMBER: P1275175  
 CATALOG NUMBER: P3AS02R509835DE010 E3DLD1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	13.9	8.5
10°-20°	35.5	21.8
20°-30°	43.1	26.4
30°-40°	36.5	22.4
40°-50°	19.0	11.7
50°-60°	6.8	4.2
60°-70°	4.7	2.9
70°-80°	2.6	1.6
80°-90°	0.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	92.5	56.7
0°-40°	129.0	79.2
0°-60°	154.9	95.0
0°-90°	163.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	163.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	151	
5°	148	14
15°	127	35
25°	94	43
35°	59	37
45°	25	19
55°	7	7
65°	5	5
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P1275175  
CATALOG NUMBER: P3AS02R509835DE010 E3DLD1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	151.1
2.5°	150.5
5°	148.3
7.5°	144.9
10°	140.1
12.5°	133.9
15°	127.2
17.5°	119.6
20°	111.2
22.5°	102.7
25°	94.3
27.5°	85.6
30°	76.6
32.5°	67.7
35°	58.8
37.5°	50.0
40°	41.3
42.5°	32.9
45°	24.6
47.5°	16.4
50°	10.6
52.5°	8.2
55°	7.4
57.5°	6.7
60°	6.1
62.5°	5.4
65°	4.8
67.5°	4.1
70°	3.5
72.5°	3.0
75°	2.4
77.5°	1.9
80°	1.5
82.5°	1.1
85°	0.7
87.5°	0.4
90°	0.0

(END OF REPORT)