

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275189

Luminaire Tested: P3AS02R559835DE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275189
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R559835DE010 E3CD1MMS
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 98CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 248.1 lumens
Efficiency: N/A
Efficacy: 68.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275189

CATALOG NUMBER: P3AS02R559835DE010 E3CD1MMS

Luminous Intensity Polar Plot

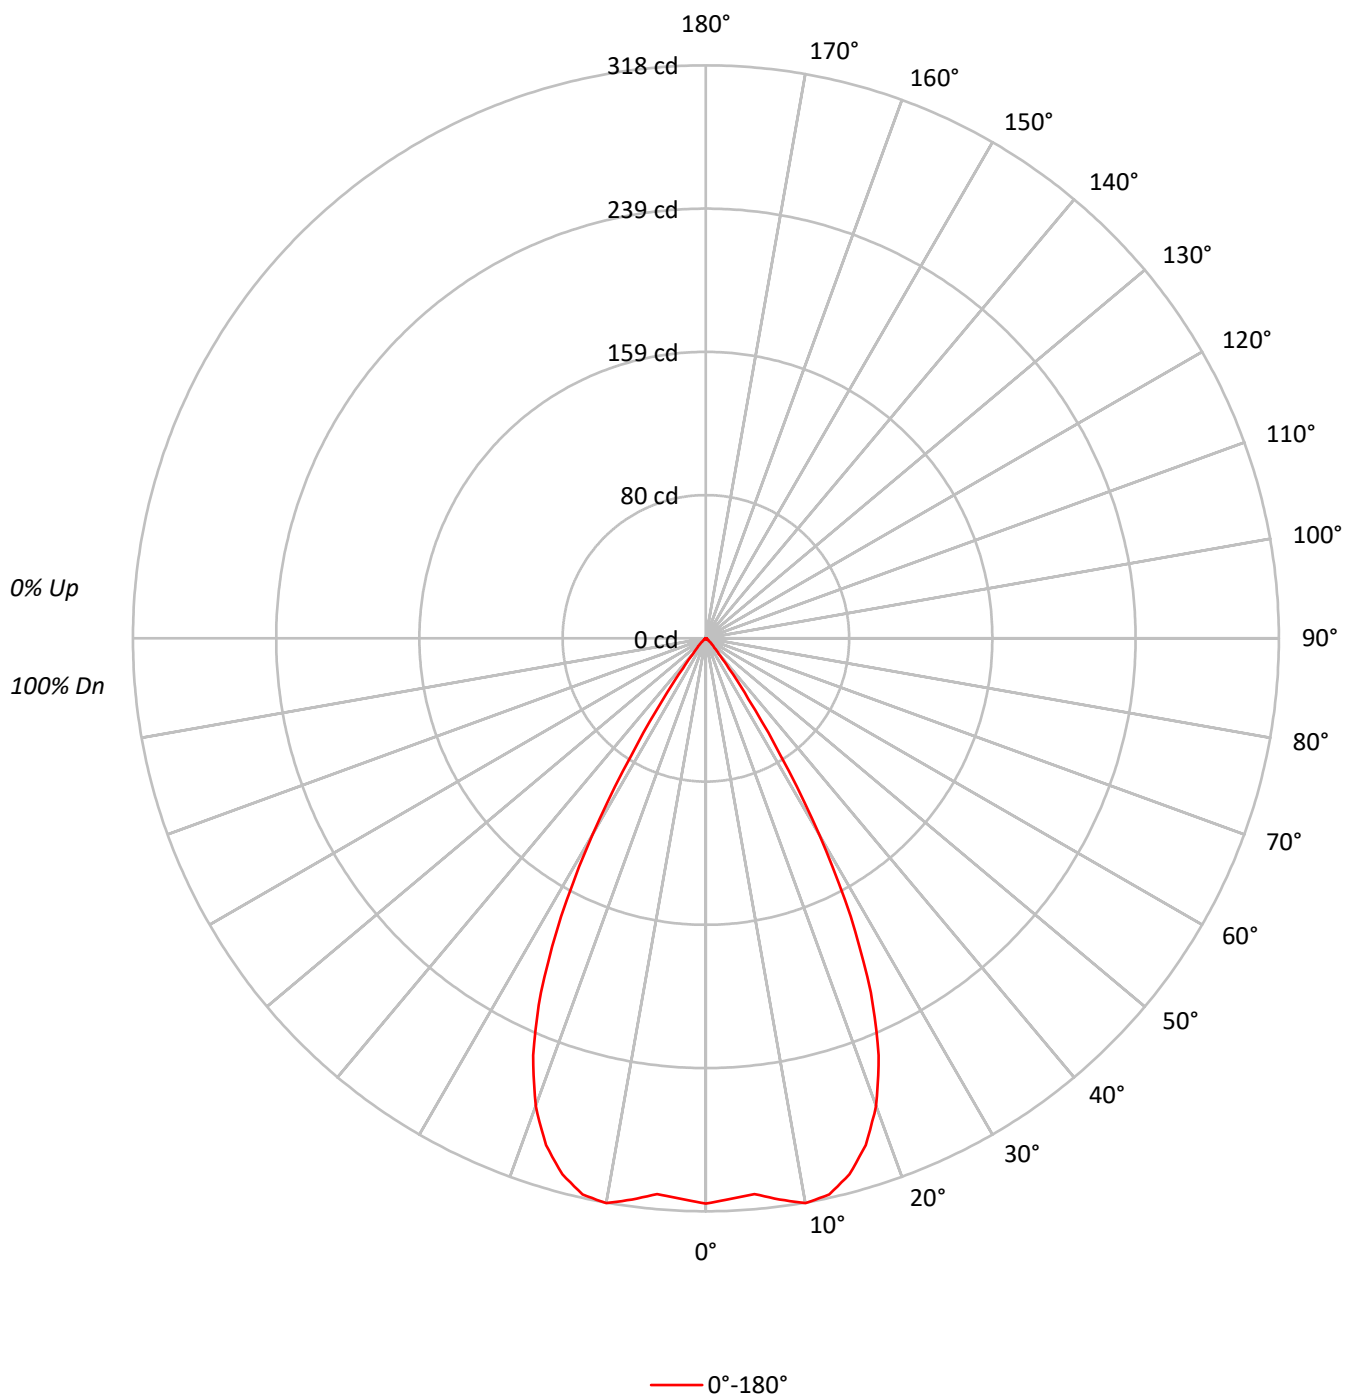

TEST NUMBER: P1275189

CATALOG NUMBER: P3AS02R559835DE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	112	109	107	105	105	104	102		101	100	99		98
2	109	104	101	98	107	103	99	96	100	97	94		97	94	92		94
3	104	98	94	90	102	97	93	89	94	91	88		92	89	86		90
4	99	92	87	84	98	91	87	83	89	85	82		87	84	81		85
5	95	87	82	78	93	86	81	78	85	80	77		83	79	76		82
6	91	83	77	73	89	82	77	73	80	76	72		79	75	72		78
7	87	78	73	69	85	78	72	69	76	72	68		75	71	68		74
8	83	74	69	65	82	74	68	65	73	68	65		72	67	64		71
9	79	71	65	61	78	70	65	61	69	64	61		68	64	61		68
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	68788
5°	68149
10°	70874
15°	69898
20°	64452
25°	52455
30°	31853
35°	11029
40°	3149
45°	1489
50°	648
55°	268
60°	307
65°	311
70°	256
75°	339
80°	253
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1489 cd/sqm

TEST NUMBER: P1275189

CATALOG NUMBER: P3AS02R559835DE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.9	12.1
10°-20°	85.6	34.5
20°-30°	95.4	38.5
30°-40°	31.2	12.6
40°-50°	4.1	1.7
50°-60°	0.8	0.3
60°-70°	0.5	0.2
70°-80°	0.3	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	210.9	85.0
0°-40°	242.1	97.6
0°-60°	247.1	99.6
0°-90°	248.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	248.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	314	
5°	310	30
15°	308	86
25°	217	95
35°	41	31
45°	5	4
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1275189

CATALOG NUMBER: P3AS02R559835DE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	313.7
2.5°	311.4
5°	309.6
7.5°	314.1
10°	318.3
12.5°	316.1
15°	307.9
17.5°	294.9
20°	276.2
22.5°	250.5
25°	216.8
27.5°	173.9
30°	125.8
32.5°	77.2
35°	41.2
37.5°	20.9
40°	11.0
42.5°	7.1
45°	4.8
47.5°	3.4
50°	1.9
52.5°	1.1
55°	0.7
57.5°	0.7
60°	0.7
62.5°	0.6
65°	0.6
67.5°	0.4
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.2
80°	0.2
82.5°	0.2
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)