

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275224

Luminaire Tested: P3AS02R609835DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275224
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R609835DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 98CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 224.0 lumens
Efficiency: N/A
Efficacy: 62.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275224

CATALOG NUMBER: P3AS02R609835DE010 E3D1WMH

Luminous Intensity Polar Plot

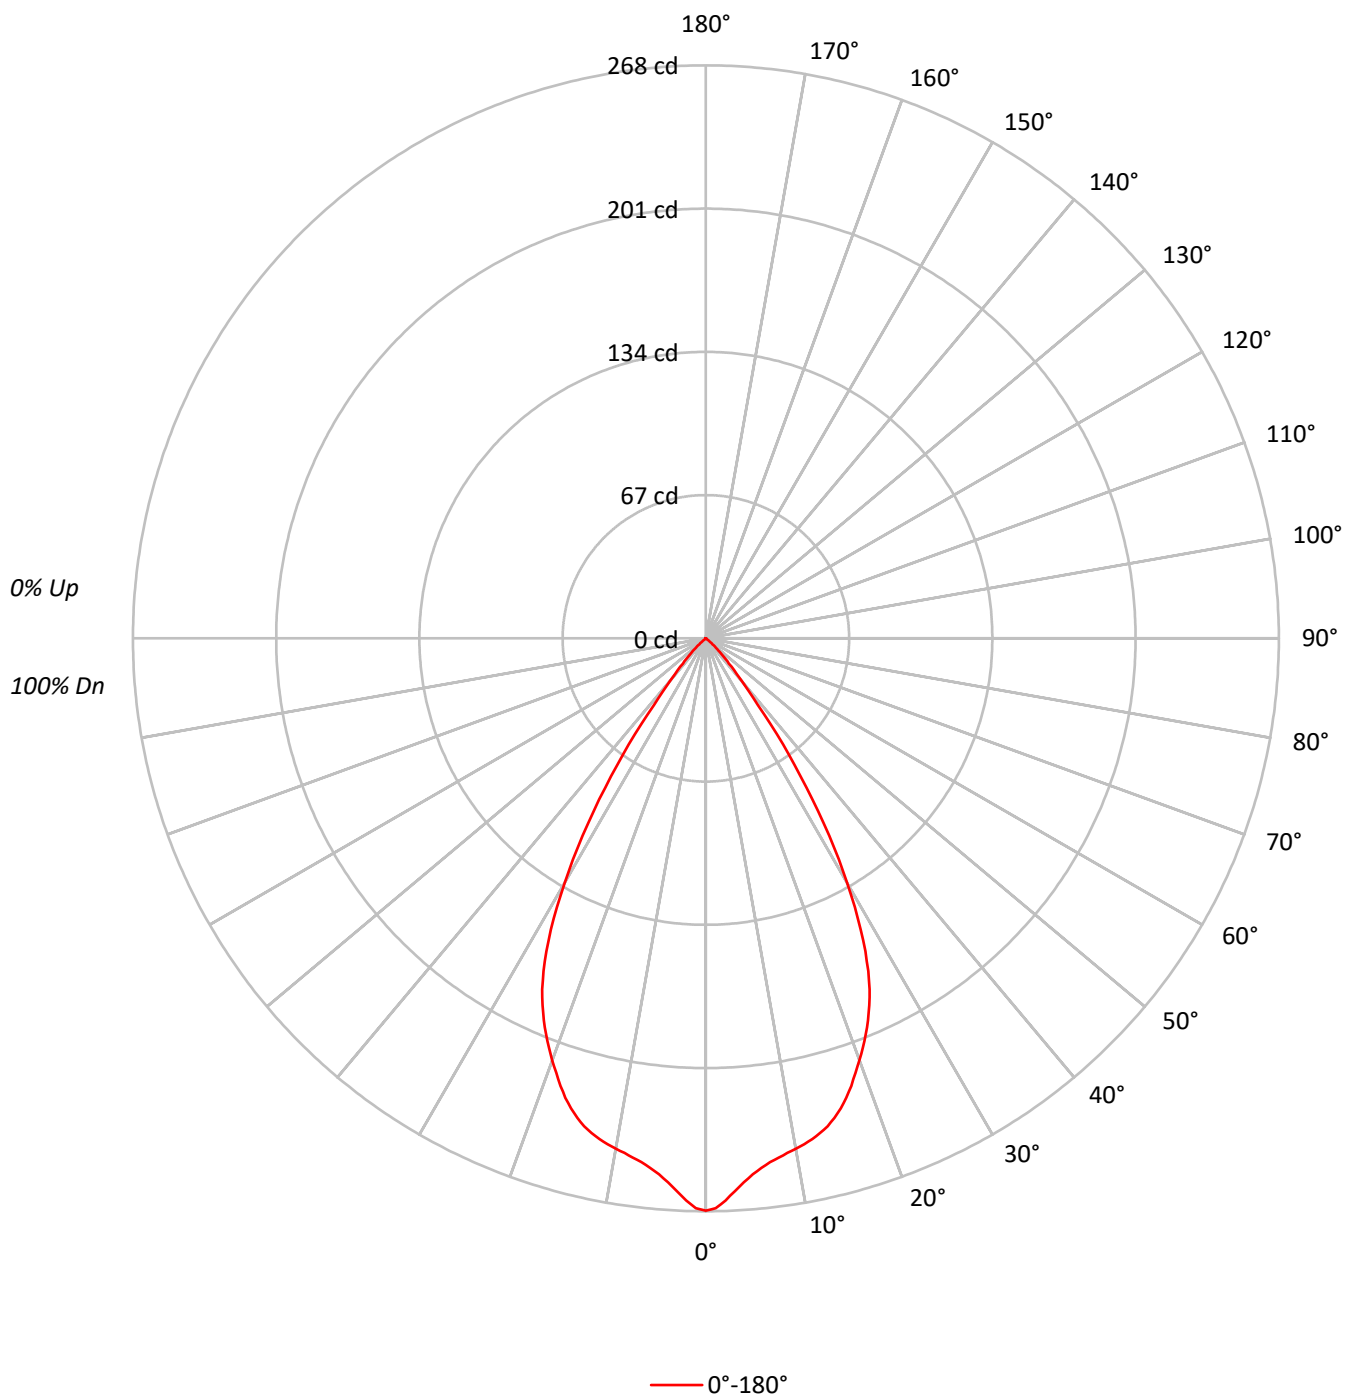

TEST NUMBER: P1275224

CATALOG NUMBER: P3AS02R609835DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	96	91	88	93	89	86		91	87	85		88
4	98	91	85	81	96	90	85	81	88	83	80		86	82	79		84
5	93	85	80	75	92	84	79	75	83	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71
8	81	71	65	61	79	71	65	61	70	65	61		69	64	61		68
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	58701
5°	55404
10°	53974
15°	52736
20°	49028
25°	43841
30°	33474
35°	19327
40°	7500
45°	3132
50°	682
55°	115
60°	88
65°	52
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3132 cd/sqm

TEST NUMBER: P1275224

CATALOG NUMBER: P3AS02R609835DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	23.8	10.6
10°-20°	64.7	28.9
20°-30°	81.0	36.2
30°-40°	45.3	20.2
40°-50°	8.6	3.8
50°-60°	0.5	0.2
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	169.5	75.7
0°-40°	214.8	95.9
0°-60°	223.9	99.9
0°-90°	224.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	224.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	268	
5°	252	24
15°	232	65
25°	181	81
35°	72	45
45°	10	9
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1275224

CATALOG NUMBER: P3AS02R609835DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	267.7
1°	266.6
2°	263.1
3°	258.9
4°	255.1
5°	251.7
6°	249.1
7°	246.9
8°	245.3
9°	243.7
10°	242.4
11°	241.0
12°	239.4
13°	237.5
14°	235.2
15°	232.3
16°	228.7
17°	224.7
18°	220.1
19°	214.9
20°	210.1
21°	205.0
22°	199.7
23°	194.1
24°	187.9
25°	181.2
26°	173.2
27°	164.3
28°	154.3
29°	143.7
30°	132.2
31°	120.7
32°	108.8
32.5°	102.3
33°	96.4
34°	84.2
35°	72.2
36°	61.4
37°	49.9
37.5°	44.7
38°	39.6
39°	31.9
40°	26.2
42.5°	15.9
45°	10.1

TEST NUMBER: P1275224

CATALOG NUMBER: P3AS02R609835DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	5.6
50°	2.0
52.5°	0.5
55°	0.3
57.5°	0.2
60°	0.2
62.5°	0.1
65°	0.1
67.5°	0.1
70°	0.1
72.5°	0.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)