

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275237

Luminaire Tested: P3AS02R609835DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275237
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R609835DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 98CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 66.0 lumens
Efficiency: N/A
Efficacy: 18.3 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275237

CATALOG NUMBER: P3AS02R609835DE010 E3DLP1GPH

Luminous Intensity Polar Plot

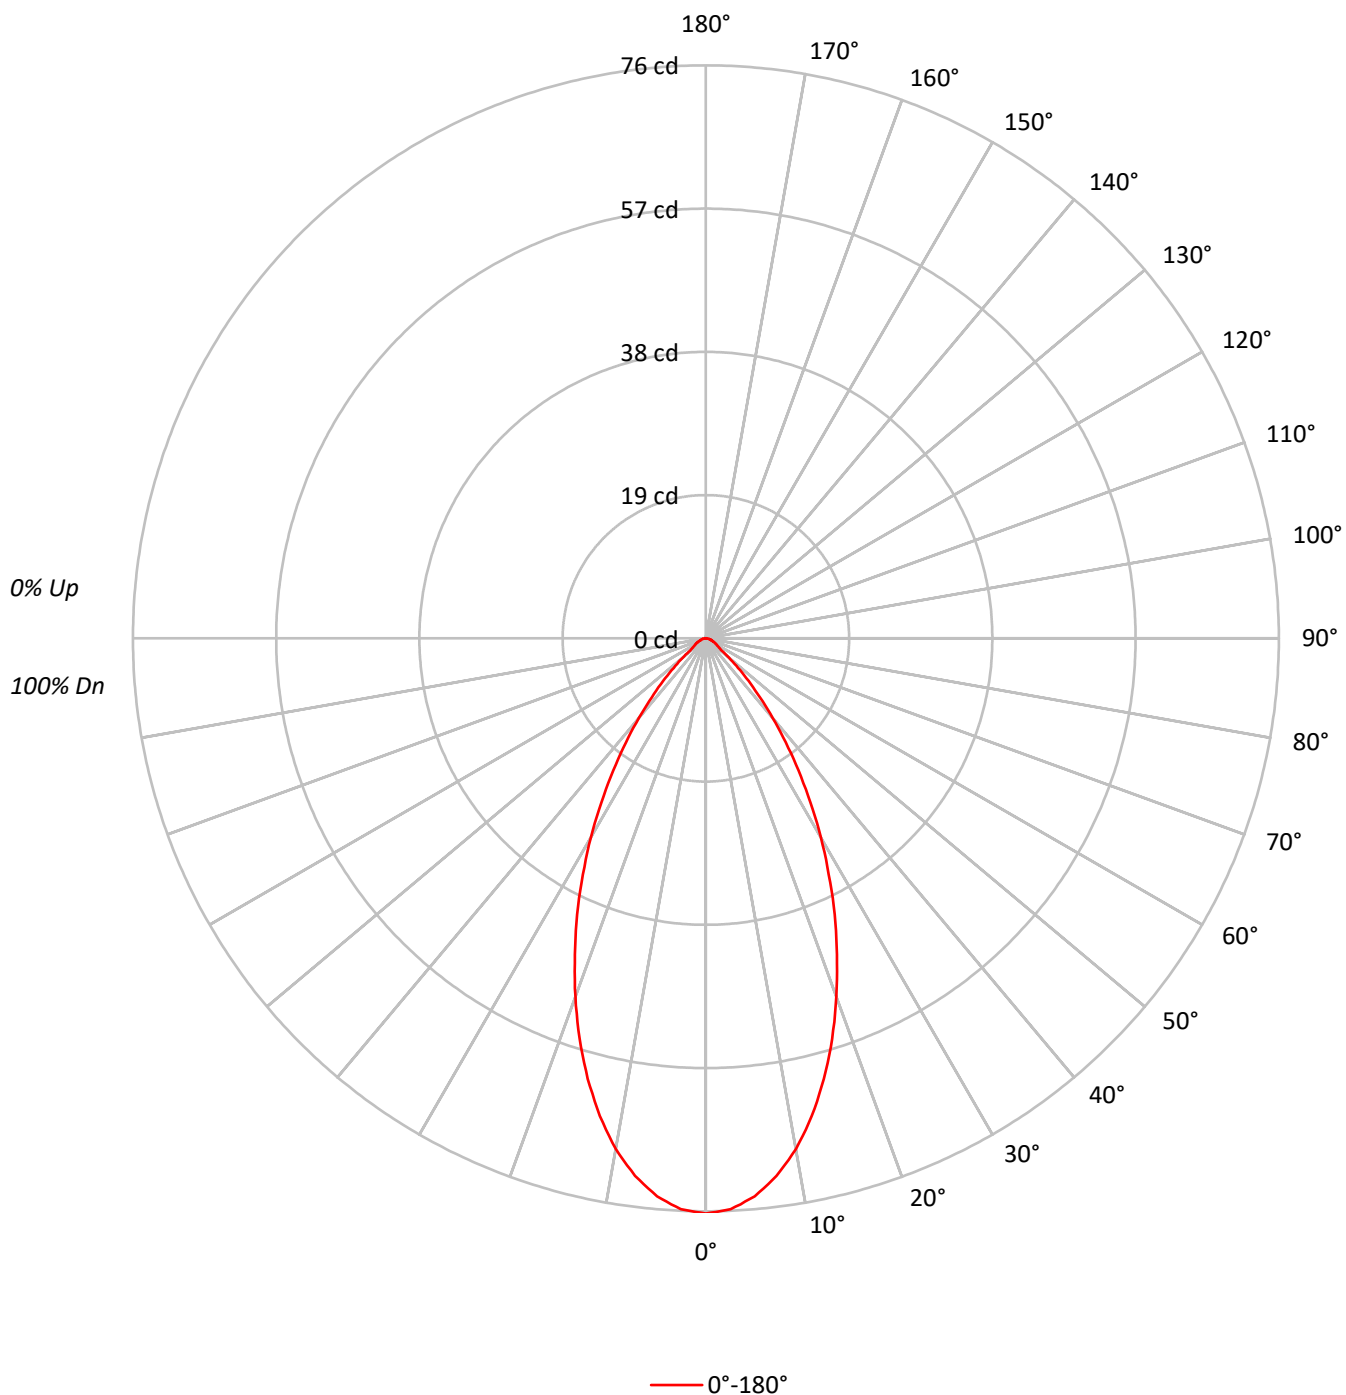

TEST NUMBER: P1275237

CATALOG NUMBER: P3AS02R609835DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		91
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		85
4	95	87	81	77	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	60	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	16731
5°	16355
10°	15319
15°	13734
20°	11808
25°	9775
30°	7723
35°	5729
40°	3950
45°	2481
50°	1365
55°	803
60°	702
65°	623
70°	513
75°	508
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2481 cd/sqm

TEST NUMBER: P1275237

CATALOG NUMBER: P3AS02R609835DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	6.9	10.5
10°-20°	16.8	25.4
20°-30°	18.4	27.9
30°-40°	13.4	20.3
40°-50°	6.3	9.6
50°-60°	2.1	3.1
60°-70°	1.2	1.8
70°-80°	0.6	1.0
80°-90°	0.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	42.1	63.8
0°-40°	55.6	84.2
0°-60°	64.0	96.9
0°-90°	66.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	66.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	76	
5°	74	7
15°	60	17
25°	40	18
35°	21	13
45°	8	6
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1275237

CATALOG NUMBER: P3AS02R609835DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	76.3
2.5°	75.8
5°	74.3
7.5°	71.9
10°	68.8
12.5°	64.9
15°	60.5
17.5°	55.7
20°	50.6
22.5°	45.4
25°	40.4
27.5°	35.3
30°	30.5
32.5°	25.8
35°	21.4
37.5°	17.4
40°	13.8
42.5°	10.6
45°	8.0
47.5°	5.8
50°	4.0
52.5°	2.6
55°	2.1
57.5°	1.8
60°	1.6
62.5°	1.4
65°	1.2
67.5°	1.0
70°	0.8
72.5°	0.7
75°	0.6
77.5°	0.5
80°	0.4
82.5°	0.3
85°	0.2
87.5°	0.1
90°	0.0

(END OF REPORT)