

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275248

Luminaire Tested: P3AS02R659835DE010 E3CD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275248
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R659835DE010 E3CD1MW
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 98CRI , E3CD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 231.0 lumens
Efficiency: N/A
Efficacy: 64.2 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275248

CATALOG NUMBER: P3AS02R659835DE010 E3CD1MW

Luminous Intensity Polar Plot

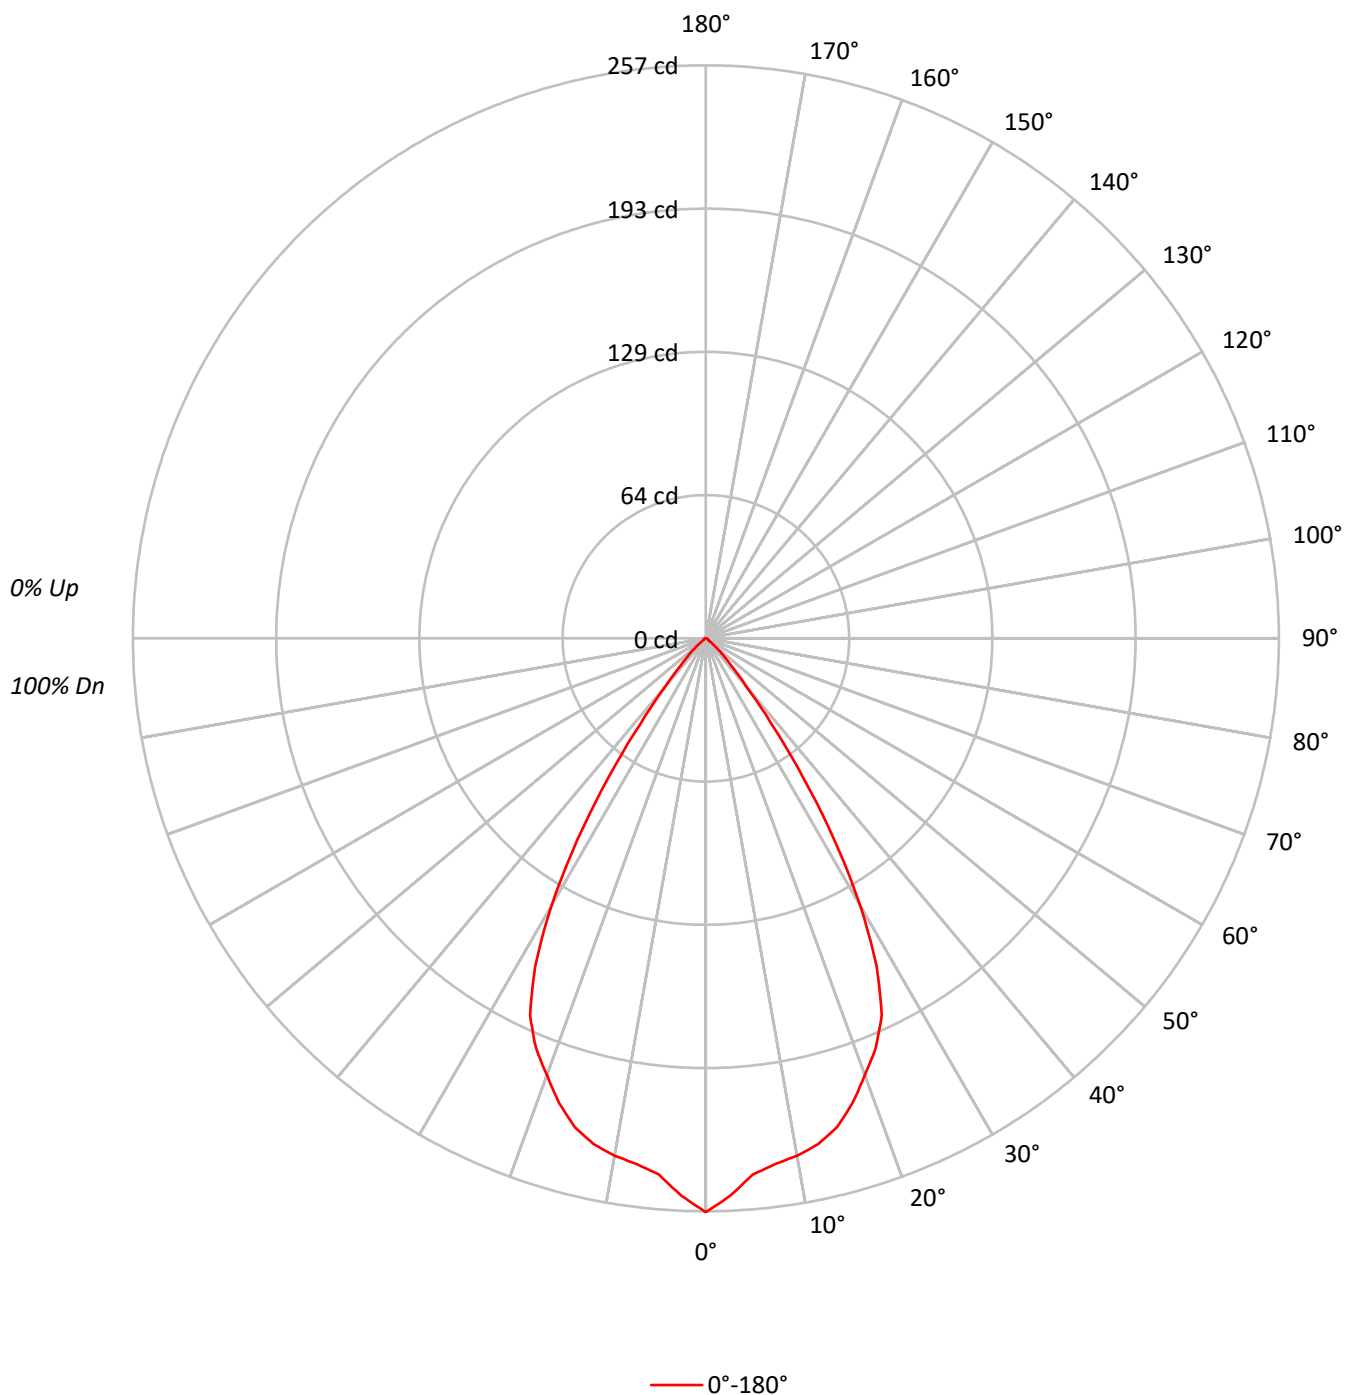

TEST NUMBER: P1275248

CATALOG NUMBER: P3AS02R659835DE010 E3CD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	95		98	95	93		95	93	91		92	90	89
3	103	96	91	87		101	95	90	87		92	88	85		90	87	84		87	85	83
4	97	90	84	80		96	89	84	80		87	82	79		85	81	78		83	80	77
5	93	84	78	74		91	83	78	74		82	77	73		80	76	73		78	75	72
6	88	79	73	69		86	78	73	69		77	72	68		75	71	68		74	70	67
7	84	74	68	64		82	74	68	64		72	67	64		71	67	63		70	66	63
8	80	70	64	60		78	69	64	60		68	63	60		67	63	59		66	62	59
9	76	66	60	56		75	66	60	56		65	60	56		64	59	56		63	59	56
10	72	63	57	53		71	62	57	53		61	56	53		60	56	53		60	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	56443
5°	53137
10°	52460
15°	51533
20°	48654
25°	45148
30°	35094
35°	20291
40°	8187
45°	3752
50°	1467
55°	573
60°	482
65°	467
70°	449
75°	508
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3752 cd/sqm

TEST NUMBER: P1275248

CATALOG NUMBER: P3AS02R659835DE010 E3CD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.9	9.9
10°-20°	63.4	27.4
20°-30°	83.0	35.9
30°-40°	48.0	20.8
40°-50°	10.3	4.4
50°-60°	1.7	0.7
60°-70°	0.9	0.4
70°-80°	0.6	0.2
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	169.3	73.3
0°-40°	217.4	94.1
0°-60°	229.3	99.3
0°-90°	231.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	231.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	257	
5°	241	23
15°	227	63
25°	187	83
35°	76	48
45°	12	10
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1275248

CATALOG NUMBER: P3AS02R659835DE010 E3CD1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	257.4
2.5°	250.2
5°	241.4
7.5°	237.8
10°	235.6
12.5°	232.4
15°	227.0
17.5°	218.6
20°	208.5
22.5°	199.0
25°	186.6
27.5°	165.9
30°	138.6
32.5°	107.4
35°	75.8
37.5°	48.0
40°	28.6
42.5°	17.9
45°	12.1
47.5°	7.8
50°	4.3
52.5°	2.1
55°	1.5
57.5°	1.3
60°	1.1
62.5°	1.1
65°	0.9
67.5°	0.7
70°	0.7
72.5°	0.6
75°	0.6
77.5°	0.4
80°	0.4
82.5°	0.2
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)