

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275360

Luminaire Tested: P3AS05R259835DE010 E3CD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275360
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259835DE010 E3CD1MW
Description: 3in Adjustable LED luminaire with, R25 optic, 3500K CCT AND, 98CRI , E3CD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 492.1 lumens
Efficiency: N/A
Efficacy: 68.3 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275360

CATALOG NUMBER: P3AS05R259835DE010 E3CD1MW

Luminous Intensity Polar Plot

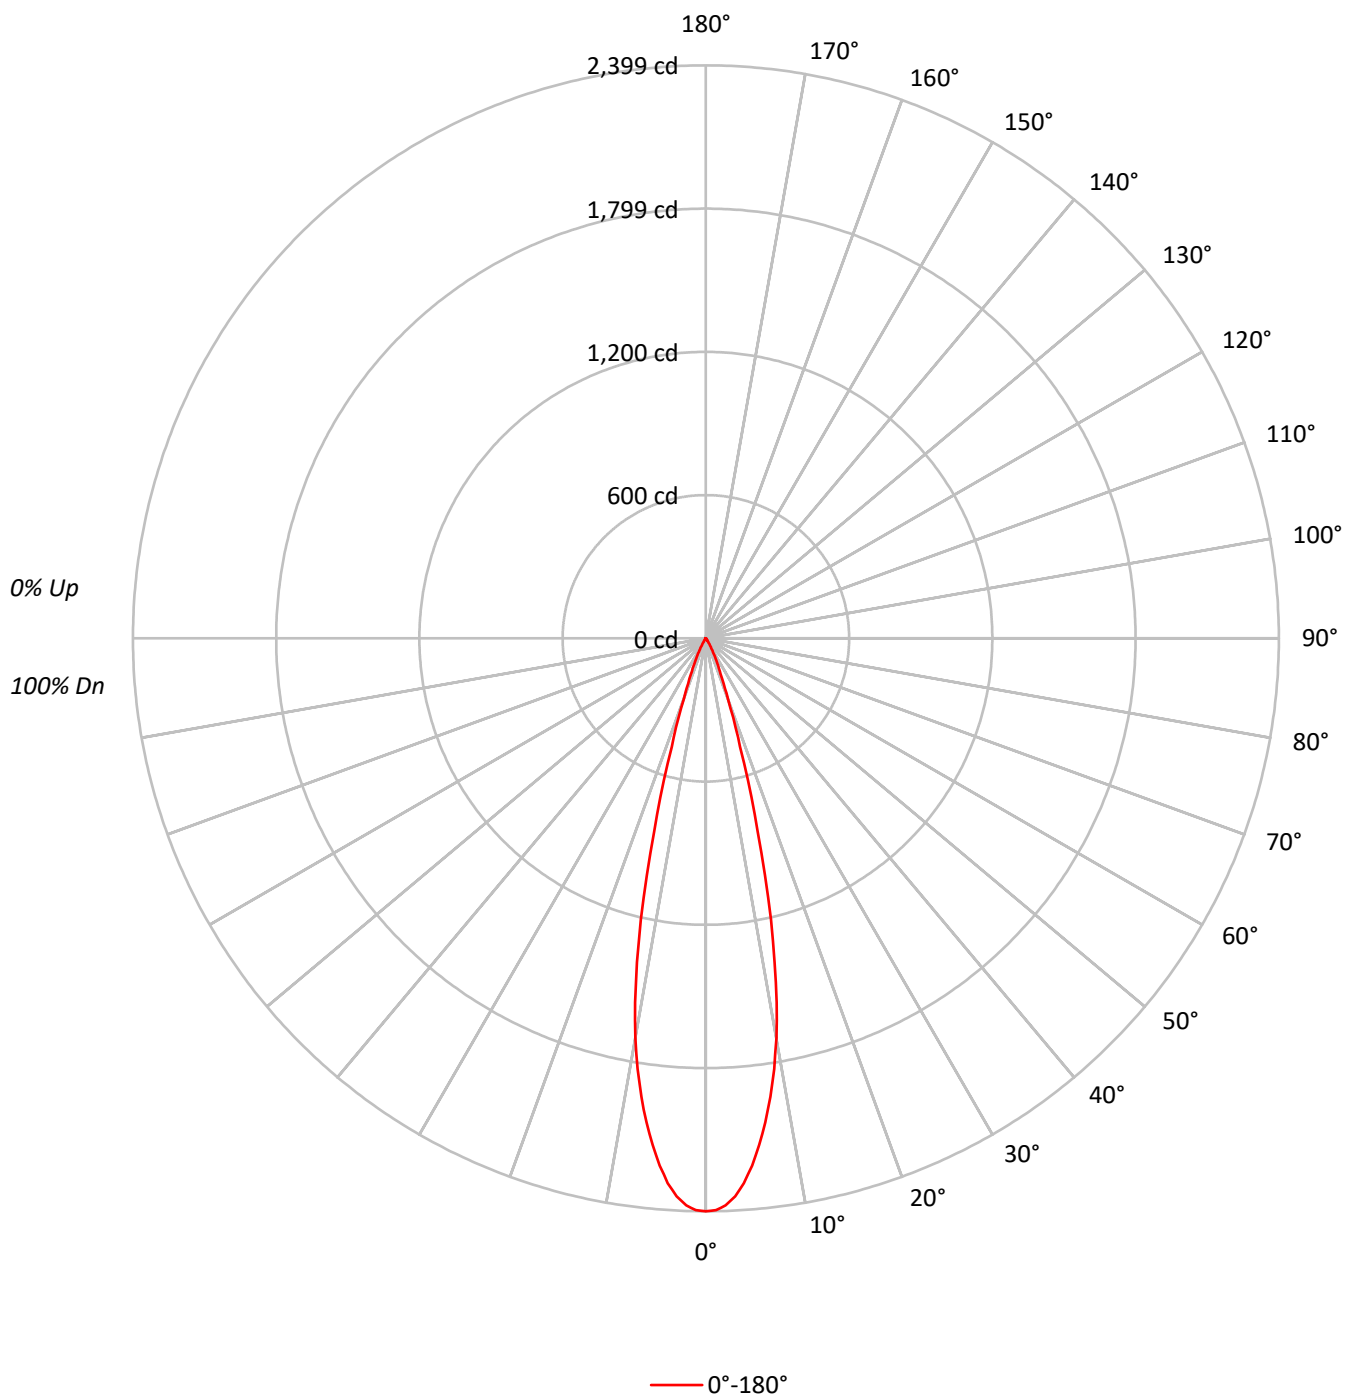

TEST NUMBER: P1275360

CATALOG NUMBER: P3AS05R259835DE010 E3CD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	96	96
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	93	93
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	91	91
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	88	88
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	86	86
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	84	84
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	82	82
8	95	89	85	82	94	89	85	82	88	84	82	87	84	82	86	83	81	81	80	80
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	78	78
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	526010
5°	487870
10°	378350
15°	189717
20°	62329
25°	24776
30°	9293
35°	2677
40°	1231
45°	465
50°	409
55°	306
60°	351
65°	415
70°	256
75°	339
80°	505
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 505 cd/sqm

TEST NUMBER: P1275360

CATALOG NUMBER: P3AS05R259835DE010 E3CD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.0	39.6
10°-20°	232.6	47.3
20°-30°	52.4	10.7
30°-40°	8.5	1.7
40°-50°	1.5	0.3
50°-60°	0.8	0.2
60°-70°	0.7	0.2
70°-80°	0.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	480.0	97.5
0°-40°	488.5	99.3
0°-60°	490.8	99.8
0°-90°	492.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	492.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2399	
5°	2216	195
15°	836	233
25°	102	52
35°	10	8
45°	2	2
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1275360

CATALOG NUMBER: P3AS05R259835DE010 E3CD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2398.8
1°	2395.0
2°	2375.6
3°	2340.1
4°	2286.4
5°	2216.4
6°	2132.9
7°	2042.5
8°	1938.9
9°	1825.6
10°	1699.2
11°	1553.5
12°	1385.7
13°	1210.2
14°	1022.0
15°	835.7
17.5°	476.2
20°	267.1
22.5°	161.2
25°	102.4
27.5°	63.0
30°	36.7
32.5°	19.3
35°	10.0
37.5°	6.6
40°	4.3
42.5°	2.7
45°	1.5
47.5°	1.2
50°	1.2
52.5°	1.2
55°	0.8
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.8
67.5°	0.8
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.4
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1275360

CATALOG NUMBER: P3AS05R259835DE010 E3CD1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)