

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275440

Luminaire Tested: P3AS05R359835DE010 E3DLP1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275440
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R359835DE010 E3DLP1LI
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 98CRI , E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 251.0 lumens
Efficiency: N/A
Efficacy: 34.9 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275440
CATALOG NUMBER: P3AS05R359835DE010 E3DLP1LI

Luminous Intensity Polar Plot

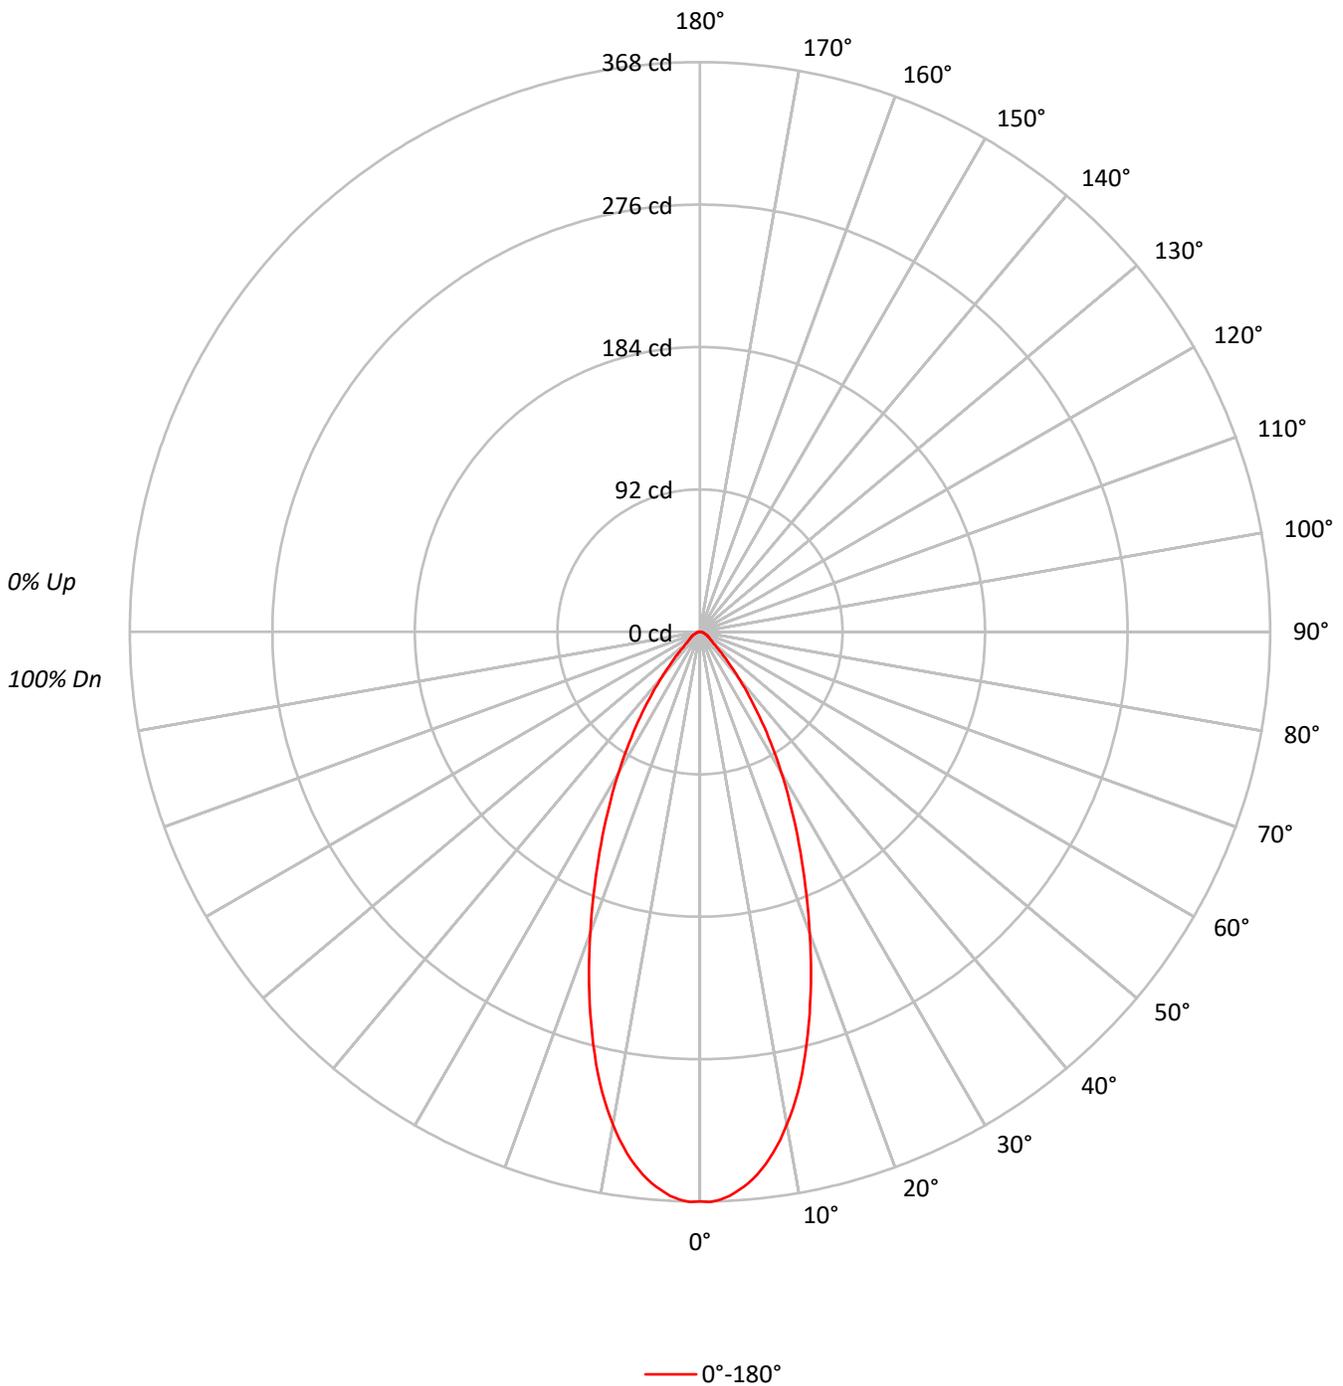



TEST NUMBER: P1275440
 CATALOG NUMBER: P3AS05R359835DE010 E3DLP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	95	95	95	93
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	87	87	87	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	81	81	81	80
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	76	76	76	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	71	71	71	69
6	87	78	72	68	86	77	72	68	76	71	67	75	70	67	73	69	66	66	66	66	65
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	62	62	62	61
8	79	70	64	60	78	69	63	59	68	63	59	67	62	59	66	62	59	59	59	59	57
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	56	56	56	56	54
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	53	53	53	53	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	80673
5°	78692
10°	71943
15°	61067
20°	48328
25°	36559
30°	26612
35°	17989
40°	11049
45°	6357
50°	3821
55°	3097
60°	2719
65°	2387
70°	1988
75°	1949
80°	1894
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6357 cd/sqm



TEST NUMBER: P1275440
 CATALOG NUMBER: P3AS05R359835DE010 E3DLP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.0	13.2
10°-20°	74.2	29.5
20°-30°	69.4	27.6
30°-40°	42.4	16.9
40°-50°	16.7	6.7
50°-60°	7.4	2.9
60°-70°	4.6	1.8
70°-80°	2.4	1.0
80°-90°	0.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	176.6	70.3
0°-40°	219.0	87.3
0°-60°	243.1	96.9
0°-90°	251.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	251.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	368	
5°	358	33
15°	269	74
25°	151	69
35°	67	42
45°	20	17
55°	8	7
65°	5	5
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1275440
CATALOG NUMBER: P3AS05R359835DE010 E3DLP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	367.9
1°	368.3
2°	367.1
3°	364.8
4°	361.4
5°	357.5
6°	352.5
7°	346.7
8°	339.7
9°	332.0
10°	323.1
11°	313.8
12°	303.8
13°	292.9
14°	281.0
15°	269.0
17.5°	238.1
20°	207.1
22.5°	177.4
25°	151.1
27.5°	126.8
30°	105.1
32.5°	85.0
35°	67.2
37.5°	51.4
40°	38.6
42.5°	27.8
45°	20.5
47.5°	14.7
50°	11.2
52.5°	9.3
55°	8.1
57.5°	7.0
60°	6.2
62.5°	5.4
65°	4.6
67.5°	3.9
70°	3.1
72.5°	2.7
75°	2.3
77.5°	1.9
80°	1.5
82.5°	1.2
85°	0.8
87.5°	0.4



TEST NUMBER: P1275440
CATALOG NUMBER: P3AS05R359835DE010 E3DLP1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)