

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275458

Luminaire Tested: P3AS05R409835DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275458
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R409835DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 98CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 221.0 lumens
Efficiency: N/A
Efficacy: 30.7 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275458
CATALOG NUMBER: P3AS05R409835DE010 E3DL1GPH

Luminous Intensity Polar Plot

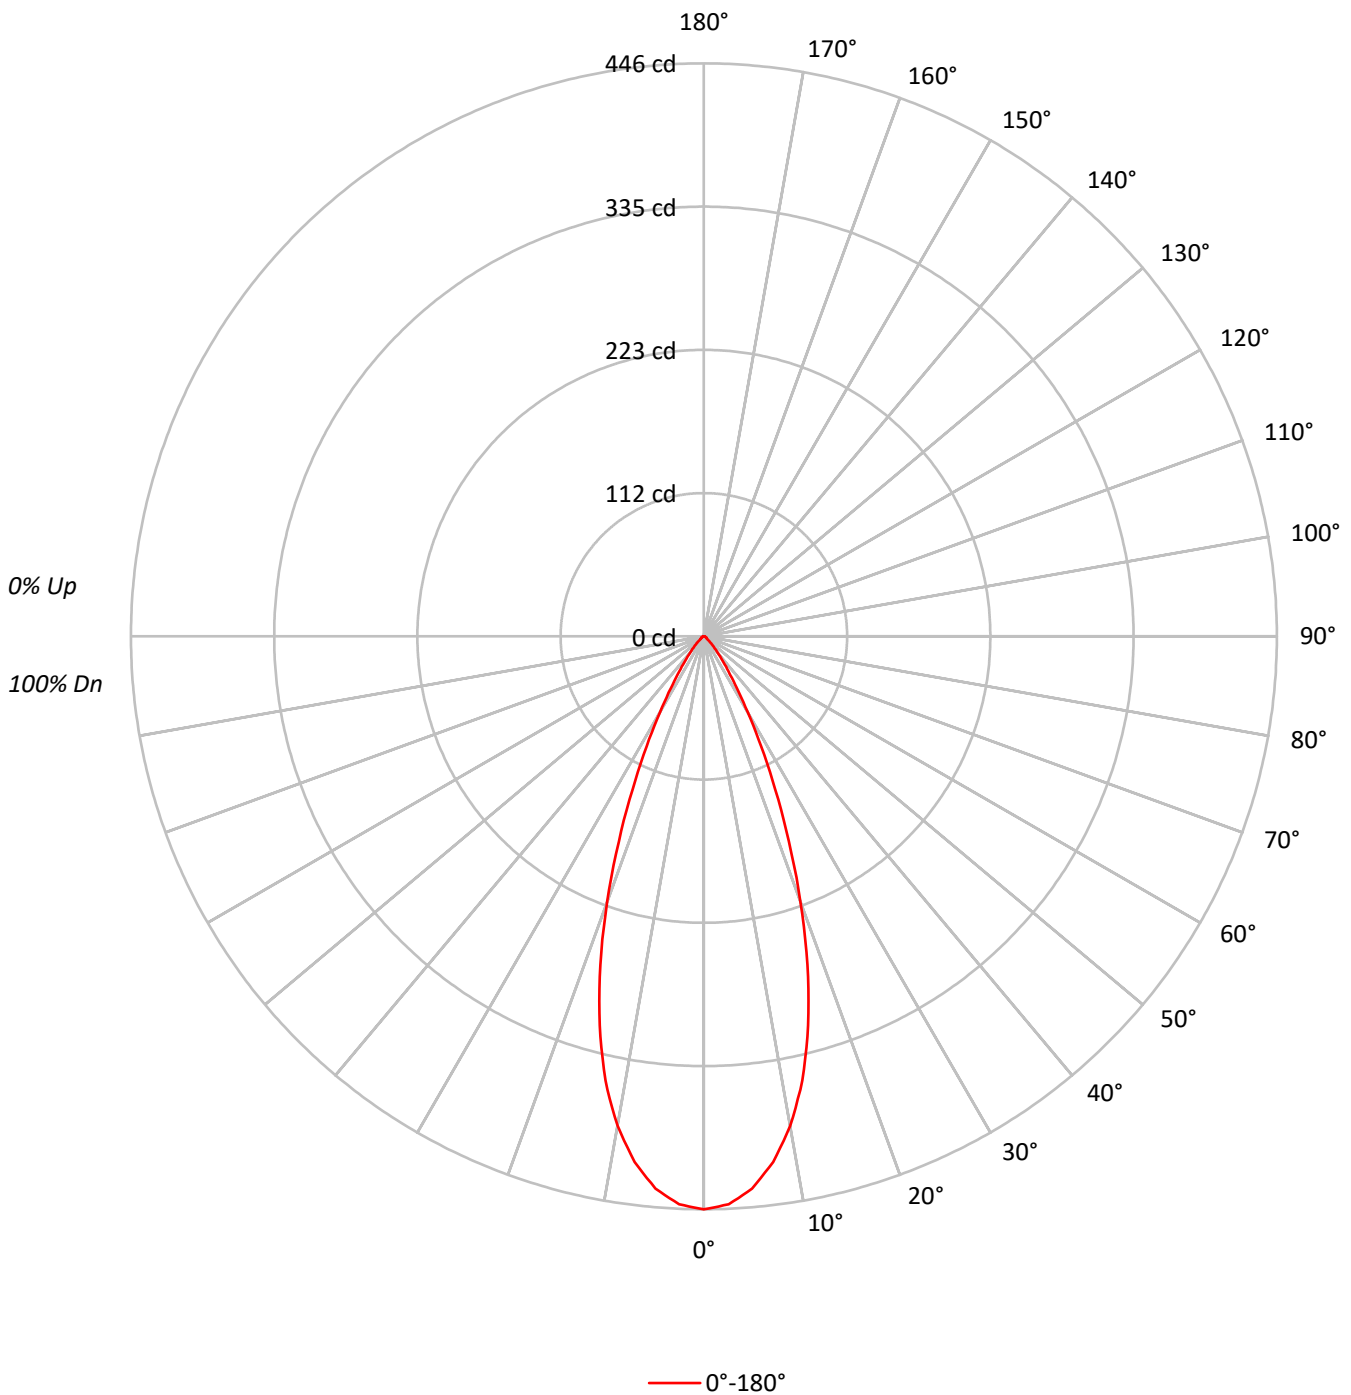



TEST NUMBER: P1275458

CATALOG NUMBER: P3AS05R409835DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	94	94	94	94
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89	89	89	89
3	104	99	94	91	102	97	93	90	95	91	88	92	89	87	90	88	86	84	84	84	84
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80	80	80	80
5	96	88	83	79	94	88	83	79	86	82	78	84	81	78	83	80	77	76	76	76	76
6	92	84	79	75	91	83	78	75	82	78	74	81	77	74	79	76	73	72	72	72	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65	65	65	65
9	82	73	68	64	81	73	68	64	72	67	64	71	67	64	70	66	64	63	63	63	63
10	78	70	65	62	78	70	65	61	69	64	61	68	64	61	67	64	61	60	60	60	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	97799
5°	94959
10°	86171
15°	71192
20°	51338
25°	31768
30°	17193
35°	8887
40°	4838
45°	2698
50°	1365
55°	1032
60°	921
65°	882
70°	833
75°	763
80°	758
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2698 cd/sqm



TEST NUMBER: P1275458
 CATALOG NUMBER: P3AS05R409835DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	39.8	18.0
10°-20°	85.4	38.6
20°-30°	60.9	27.6
30°-40°	22.4	10.1
40°-50°	7.1	3.2
50°-60°	2.5	1.1
60°-70°	1.7	0.8
70°-80°	1.0	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	186.1	84.2
0°-40°	208.5	94.3
0°-60°	218.0	98.7
0°-90°	221.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	221.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	446	
5°	431	40
15°	314	85
25°	131	61
35°	33	22
45°	9	7
55°	3	2
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1275458
CATALOG NUMBER: P3AS05R409835DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	446.0
2.5°	442.5
5°	431.4
7.5°	412.8
10°	387.0
12.5°	354.2
15°	313.6
17.5°	268.0
20°	220.0
22.5°	172.8
25°	131.3
27.5°	96.4
30°	67.9
32.5°	47.6
35°	33.2
37.5°	23.5
40°	16.9
42.5°	12.1
45°	8.7
47.5°	5.9
50°	4.0
52.5°	2.8
55°	2.7
57.5°	2.5
60°	2.1
62.5°	1.9
65°	1.7
67.5°	1.5
70°	1.3
72.5°	1.1
75°	0.9
77.5°	0.8
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)