

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275464

Luminaire Tested: P3AS05R409835DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275464
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R409835DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 98CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 169.0 lumens
Efficiency: N/A
Efficacy: 23.5 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275464
CATALOG NUMBER: P3AS05R409835DE010 E3DLD1GPH

Luminous Intensity Polar Plot

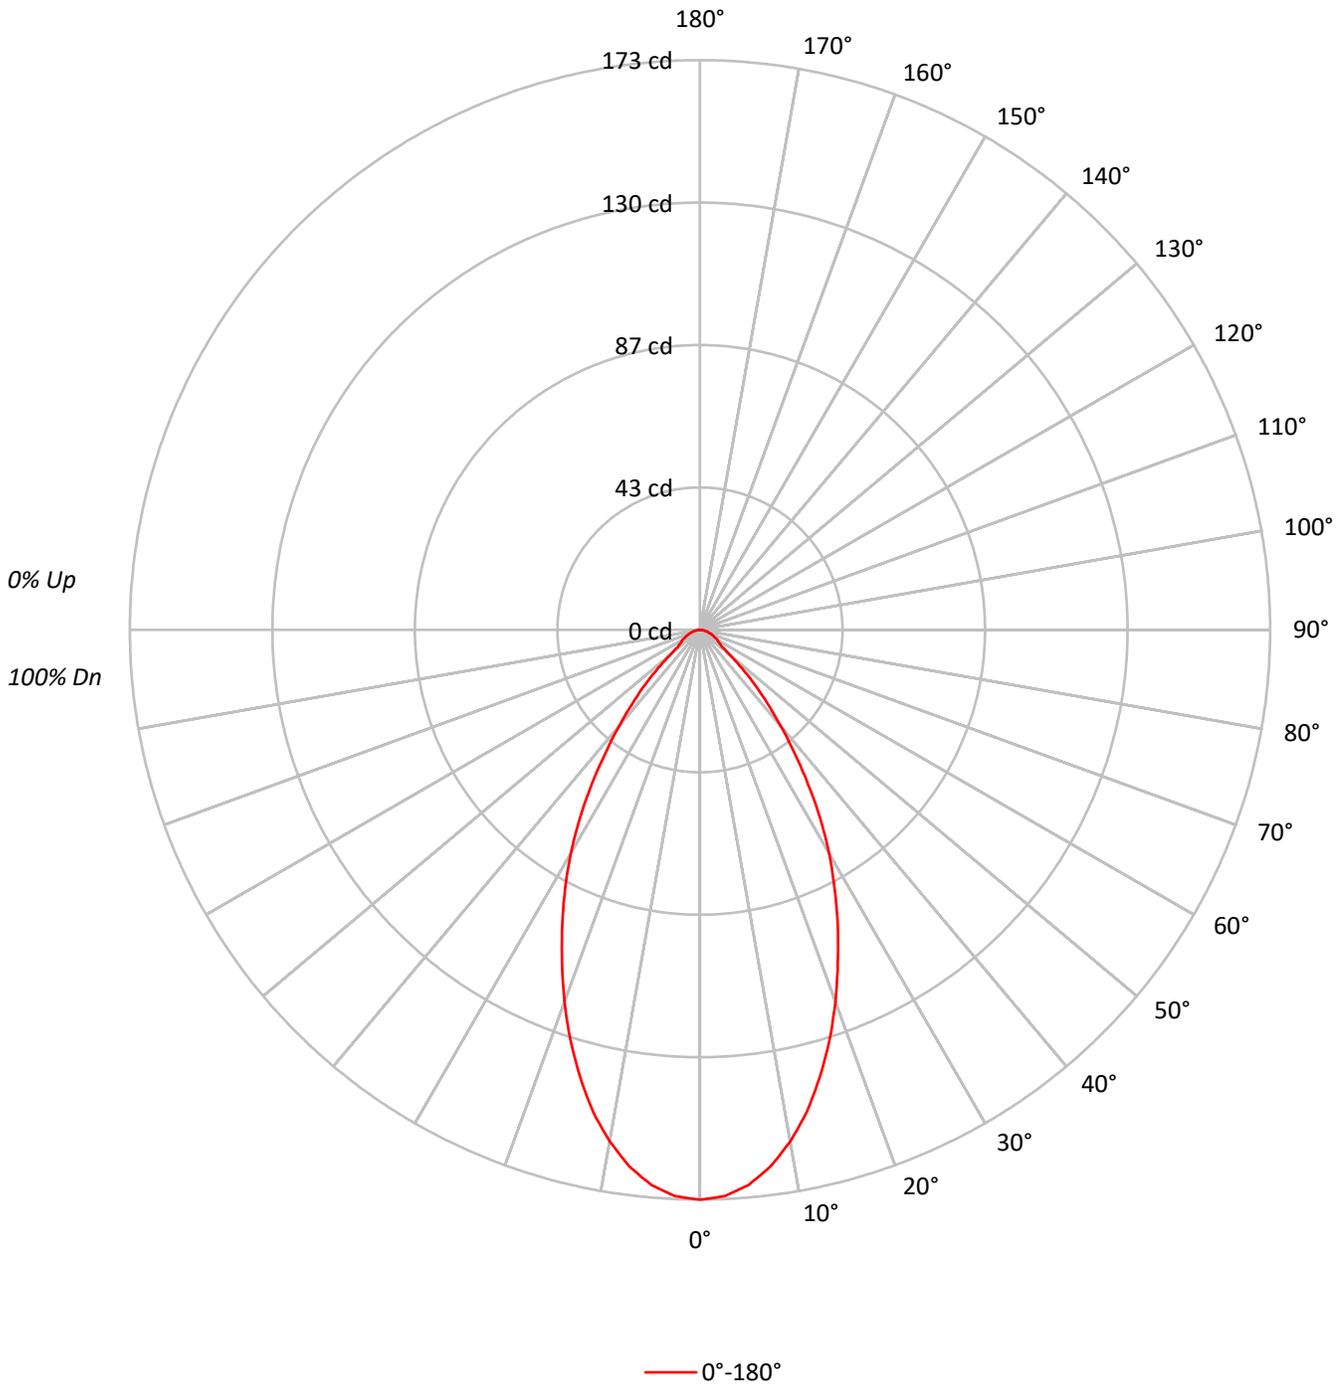



TEST NUMBER: P1275464
 CATALOG NUMBER: P3AS05R409835DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69			
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64			
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59			
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55			
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51			
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48			
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	37936
5°	37244
10°	35114
15°	31896
20°	28026
25°	23929
30°	19826
35°	15285
40°	10878
45°	7319
50°	3991
55°	2829
60°	2675
65°	2439
70°	2180
75°	2118
80°	1642
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7319 cd/sqm



TEST NUMBER: P1275464
 CATALOG NUMBER: P3AS05R409835DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.8	9.3
10°-20°	39.1	23.2
20°-30°	45.2	26.8
30°-40°	35.7	21.1
40°-50°	18.3	10.8
50°-60°	7.0	4.1
60°-70°	4.6	2.7
70°-80°	2.5	1.5
80°-90°	0.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	100.2	59.3
0°-40°	135.8	80.4
0°-60°	161.1	95.3
0°-90°	169.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	169.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	173	
5°	169	16
15°	140	39
25°	99	45
35°	57	36
45°	24	18
55°	7	7
65°	5	5
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P1275464
CATALOG NUMBER: P3AS05R409835DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	173.0
2.5°	172.1
5°	169.2
7.5°	164.3
10°	157.7
12.5°	149.9
15°	140.5
17.5°	130.7
20°	120.1
22.5°	109.3
25°	98.9
27.5°	88.5
30°	78.3
32.5°	67.9
35°	57.1
37.5°	47.1
40°	38.0
42.5°	30.3
45°	23.6
47.5°	17.2
50°	11.7
52.5°	8.5
55°	7.4
57.5°	6.6
60°	6.1
62.5°	5.3
65°	4.7
67.5°	4.0
70°	3.4
72.5°	2.8
75°	2.5
77.5°	1.9
80°	1.3
82.5°	1.1
85°	0.6
87.5°	0.4
90°	0.0

(END OF REPORT)