

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275589

Luminaire Tested: P3AS05R659835DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275589
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659835DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 98CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 478.0 lumens
Efficiency: N/A
Efficacy: 66.4 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275589

CATALOG NUMBER: P3AS05R659835DE010 E3CB1MMS

Luminous Intensity Polar Plot

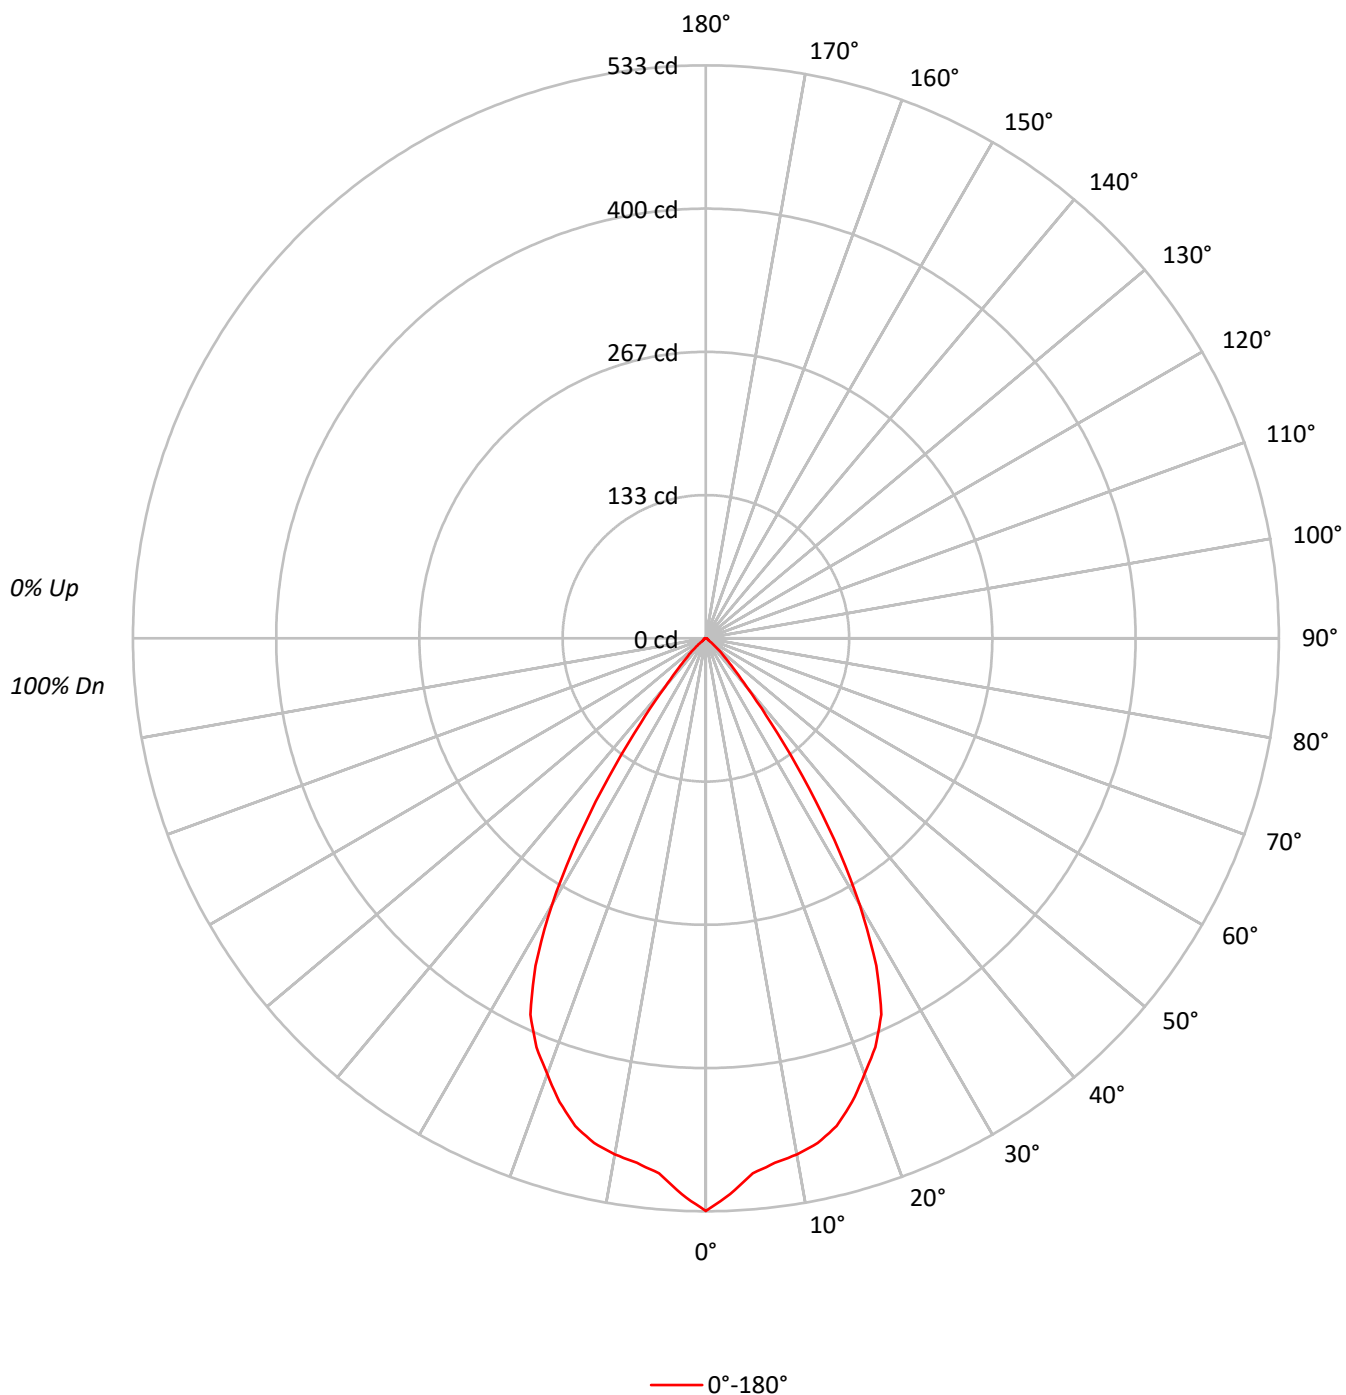

TEST NUMBER: P1275589

CATALOG NUMBER: P3AS05R659835DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	93		95	93	91		92
3	103	96	91	87	101	95	90	87	92	88	85		90	87	84		87
4	97	90	84	80	96	89	84	80	87	82	79		85	81	78		83
5	93	84	78	74	91	83	78	74	82	77	73		80	76	73		78
6	88	79	73	69	86	78	73	69	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	64	60	78	69	64	60	68	63	60		67	63	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		60	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	116811
5°	109949
10°	108548
15°	106629
20°	100669
25°	93441
30°	72619
35°	42028
40°	16917
45°	7784
50°	3036
55°	1185
60°	1009
65°	986
70°	962
75°	1017
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7784 cd/sqm

TEST NUMBER: P1275589

CATALOG NUMBER: P3AS05R659835DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.5	9.9
10°-20°	131.2	27.4
20°-30°	171.7	35.9
30°-40°	99.5	20.8
40°-50°	21.3	4.4
50°-60°	3.5	0.7
60°-70°	1.9	0.4
70°-80°	1.1	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	350.3	73.3
0°-40°	449.8	94.1
0°-60°	474.5	99.3
0°-90°	478.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	478.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	533	
5°	500	47
15°	470	131
25°	386	172
35°	157	99
45°	25	21
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1275589

CATALOG NUMBER: P3AS05R659835DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	532.7
2.5°	517.6
5°	499.5
7.5°	492.1
10°	487.5
12.5°	480.9
15°	469.7
17.5°	452.3
20°	431.4
22.5°	411.7
25°	386.2
27.5°	343.3
30°	286.8
32.5°	222.3
35°	157.0
37.5°	99.4
40°	59.1
42.5°	37.1
45°	25.1
47.5°	16.2
50°	8.9
52.5°	4.3
55°	3.1
57.5°	2.7
60°	2.3
62.5°	2.3
65°	1.9
67.5°	1.5
70°	1.5
72.5°	1.2
75°	1.2
77.5°	0.8
80°	0.8
82.5°	0.4
85°	0.4
87.5°	0.4
90°	0.0

(END OF REPORT)