

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275685

Luminaire Tested: P3AS09R209835DE010 E3DL1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1275685  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R209835DE010 E3DL1GPH  
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 98CRI , E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 289.0 lumens  
Efficiency: N/A  
Efficacy: 26.3 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1275685  
CATALOG NUMBER: P3AS09R209835DE010 E3DL1GPH

### Luminous Intensity Polar Plot

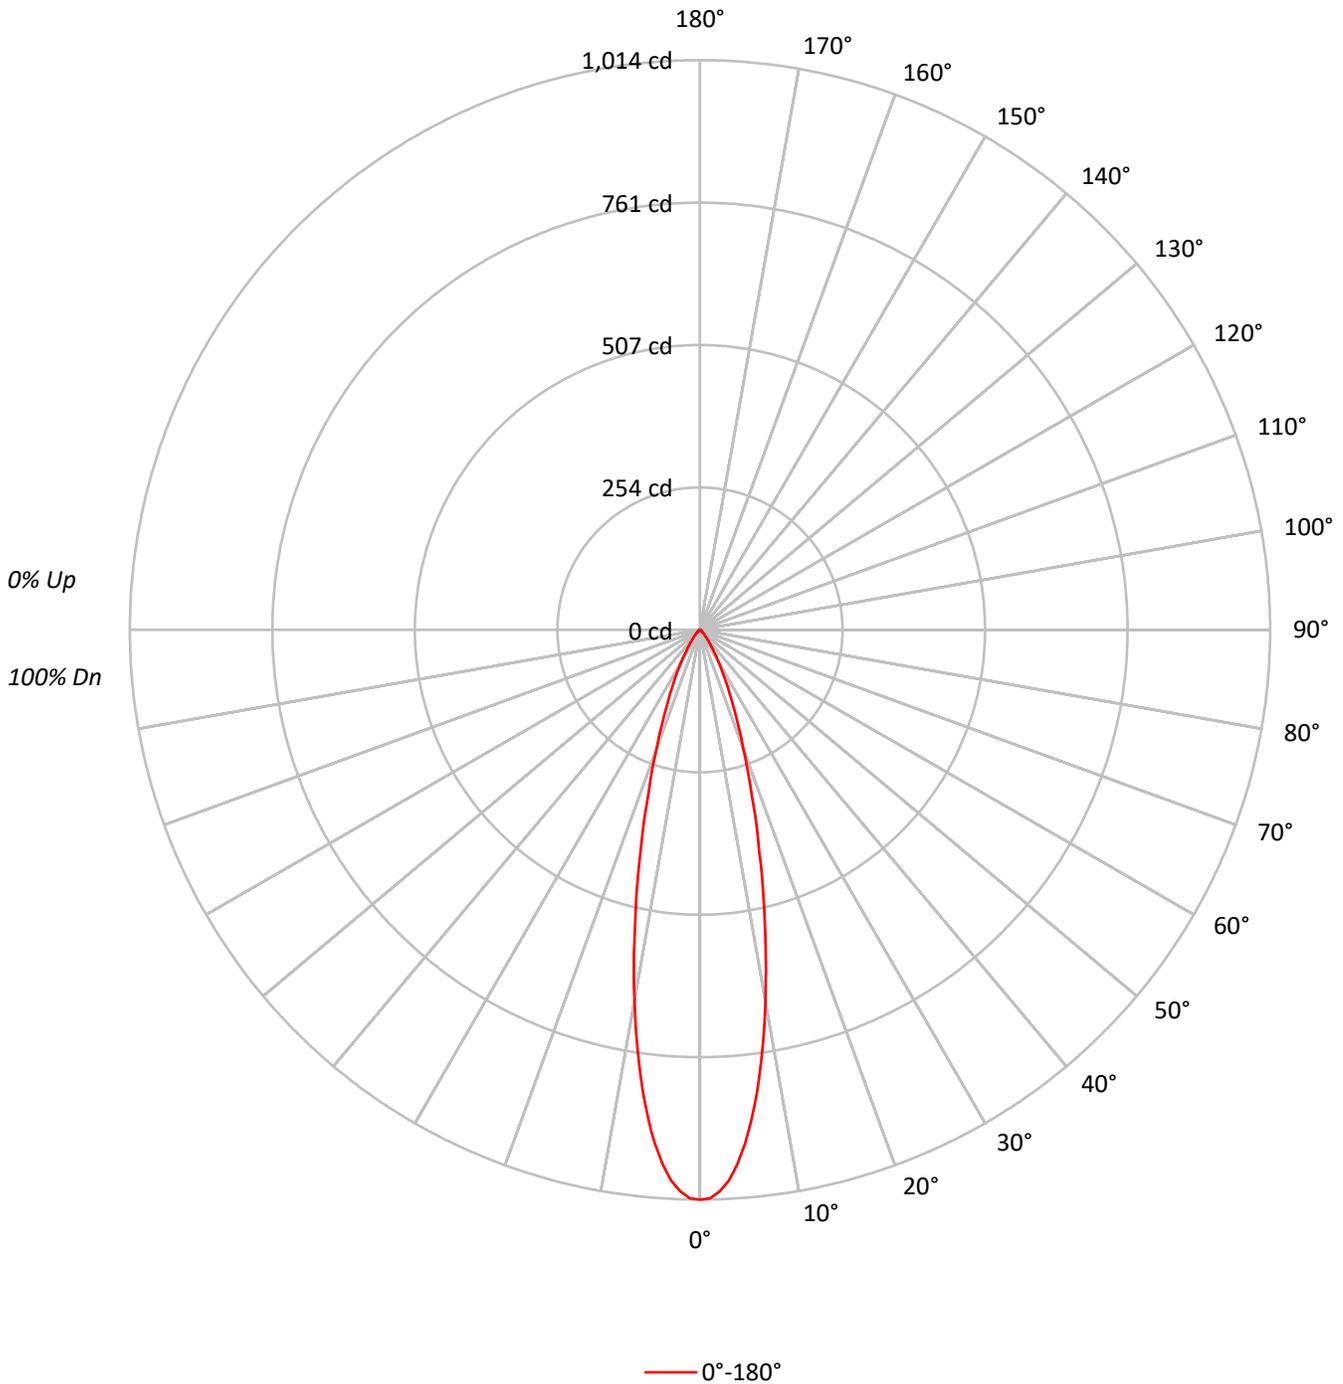



TEST NUMBER: P1275685

CATALOG NUMBER: P3AS09R209835DE010 E3DL1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91		
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87		
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83		
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79		
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76		
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73		
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	78	74	72	71		
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68		
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	222351
5°	202113
10°	149385
15°	92418
20°	52761
25°	30123
30°	16889
35°	9182
40°	5038
45°	2760
50°	1603
55°	1185
60°	1096
65°	1038
70°	898
75°	932
80°	758
85°	755

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2760 cd/sqm



TEST NUMBER: P1275685  
 CATALOG NUMBER: P3AS09R209835DE010 E3DL1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	79.5	27.5
10°-20°	113.5	39.3
20°-30°	59.2	20.5
30°-40°	22.9	7.9
40°-50°	7.4	2.6
50°-60°	2.9	1.0
60°-70°	1.9	0.7
70°-80°	1.1	0.4
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	252.3	87.3
0°-40°	275.2	95.2
0°-60°	285.5	98.8
0°-90°	289.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	289.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1014	
5°	918	80
15°	407	114
25°	124	59
35°	34	23
45°	9	7
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1275685  
CATALOG NUMBER: P3AS09R209835DE010 E3DL1GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1014.0
1°	1012.1
2°	1000.0
3°	981.6
4°	953.1
5°	918.2
6°	876.9
7°	831.1
8°	778.1
9°	726.4
10°	670.9
12.5°	533.2
15°	407.1
17.5°	304.6
20°	226.1
22.5°	167.5
25°	124.5
27.5°	91.9
30°	66.7
32.5°	48.3
35°	34.3
37.5°	24.8
40°	17.6
42.5°	12.6
45°	8.9
47.5°	6.4
50°	4.7
52.5°	3.6
55°	3.1
57.5°	2.8
60°	2.5
62.5°	2.2
65°	2.0
67.5°	1.7
70°	1.4
72.5°	1.4
75°	1.1
77.5°	0.8
80°	0.6
82.5°	0.6
85°	0.3
87.5°	0.3
90°	0.0

(END OF REPORT)