

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1275740

Luminaire Tested: P3AS09R309835DE010 E3D1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1275740
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R309835DE010 E3D1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 98CRI , E3D1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 726.0 lumens
Efficiency: N/A
Efficacy: 66.0 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1275740
CATALOG NUMBER: P3AS09R309835DE010 E3D1MW

Luminous Intensity Polar Plot

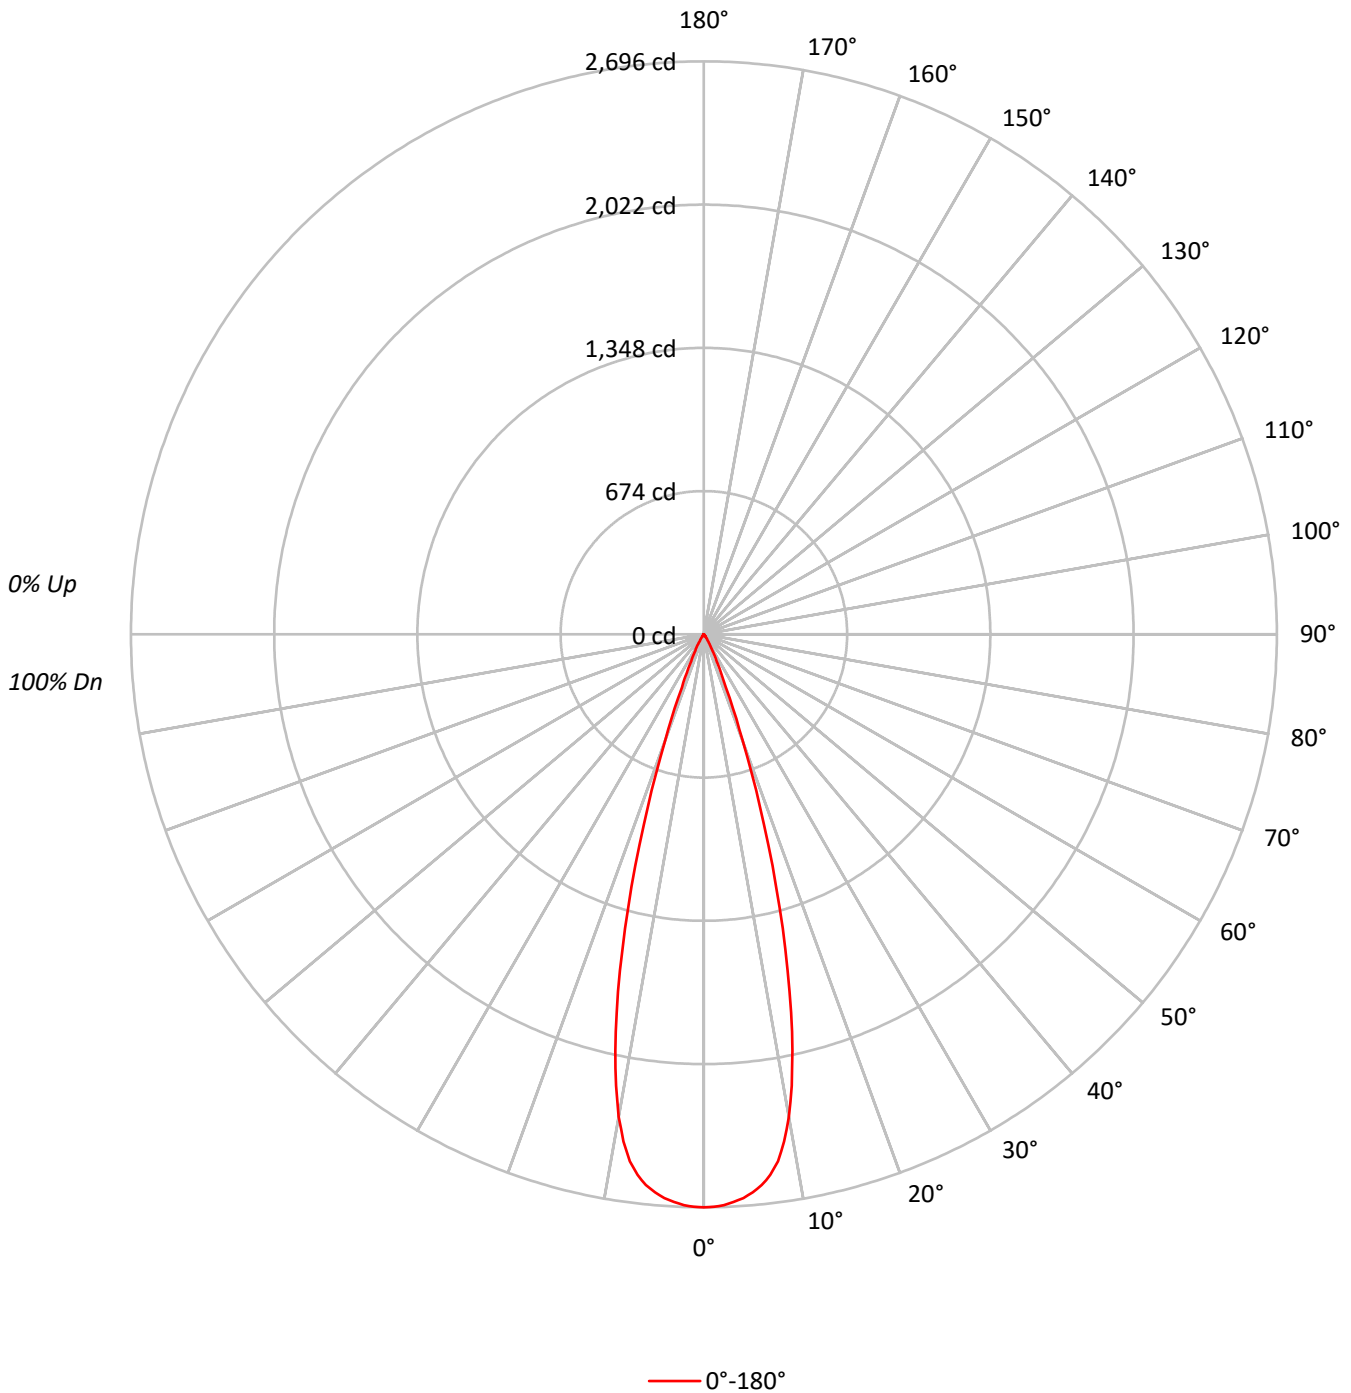



TEST NUMBER: P1275740
 CATALOG NUMBER: P3AS09R309835DE010 E3D1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	98	96	95	97
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	95	94	92	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	93	91	89	91
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	91	88	87	85
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	89	86	84	83
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	86	84	82	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	84	82	80	79
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	82	79	77	77
10	89	83	79	76	88	82	78	76	82	78	76	81	78	76	80	77	75	80	77	75	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	591203
5°	580034
10°	513484
15°	325314
20°	123491
25°	36559
30°	14433
35°	4417
40°	1947
45°	713
50°	580
55°	421
60°	482
65°	571
70°	385
75°	508
80°	758
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 80°
 Luminance: 758 cd/sqm



TEST NUMBER: P1275740
 CATALOG NUMBER: P3AS09R309835DE010 E3D1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	242.2	33.4
10°-20°	377.5	52.0
20°-30°	87.7	12.1
30°-40°	13.6	1.9
40°-50°	2.3	0.3
50°-60°	1.1	0.1
60°-70°	0.9	0.1
70°-80°	0.6	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	707.4	97.4
0°-40°	721.0	99.3
0°-60°	724.4	99.8
0°-90°	726.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	726.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2696	
5°	2635	242
15°	1433	378
25°	151	88
35°	16	14
45°	2	2
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1275740
CATALOG NUMBER: P3AS09R309835DE010 E3D1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	2696.1
1°	2694.4
2°	2687.0
3°	2674.5
4°	2658.5
5°	2635.1
6°	2606.0
7°	2562.7
8°	2503.4
9°	2416.1
10°	2306.1
11°	2164.1
12°	2003.8
13°	1825.9
14°	1630.3
15°	1433.0
17.5°	937.5
20°	529.2
22.5°	270.3
25°	151.1
27.5°	93.0
30°	57.0
32.5°	30.8
35°	16.5
37.5°	10.8
40°	6.8
42.5°	4.0
45°	2.3
47.5°	1.7
50°	1.7
52.5°	1.1
55°	1.1
57.5°	1.1
60°	1.1
62.5°	1.1
65°	1.1
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1275740
CATALOG NUMBER: P3AS09R309835DE010 E3D1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)