

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276094

Luminaire Tested: P3AS13R309835DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1276094
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R309835DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 98CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 302.1 lumens
Efficiency: N/A
Efficacy: 20.8 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1276094

CATALOG NUMBER: P3AS13R309835DE010 E3DLD1GPH

Luminous Intensity Polar Plot

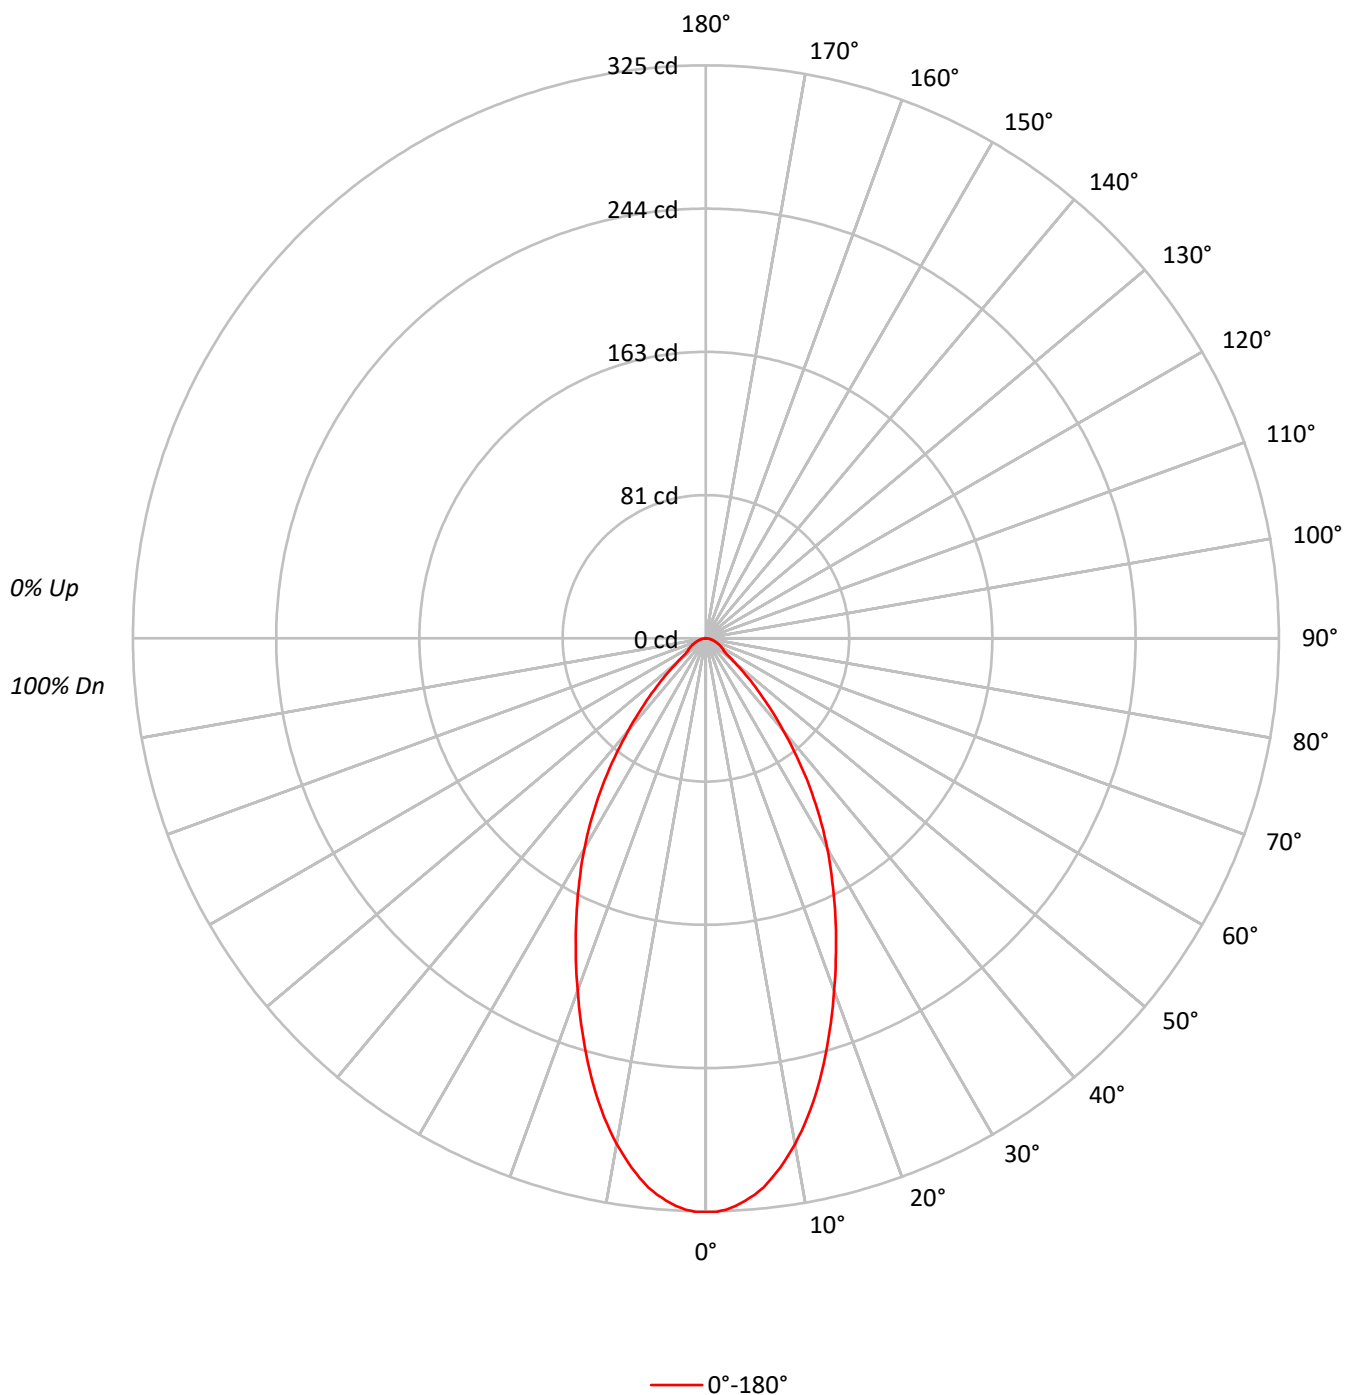

TEST NUMBER: P1276094

CATALOG NUMBER: P3AS13R309835DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	85	79	74	92	84	79	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	71354
5°	69733
10°	64862
15°	57707
20°	49634
25°	42051
30°	34917
35°	27385
40°	19637
45°	12870
50°	7335
55°	4817
60°	4561
65°	4255
70°	3783
75°	3474
80°	3283
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12870 cd/sqm

TEST NUMBER: P1276094

CATALOG NUMBER: P3AS13R309835DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.4	9.7
10°-20°	70.7	23.4
20°-30°	79.7	26.4
30°-40°	63.6	21.1
40°-50°	32.7	10.8
50°-60°	12.3	4.1
60°-70°	8.1	2.7
70°-80°	4.3	1.4
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	179.7	59.5
0°-40°	243.4	80.6
0°-60°	288.4	95.5
0°-90°	302.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	302.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	325	
5°	317	29
15°	254	71
25°	174	80
35°	102	64
45°	42	33
55°	13	12
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1276094

CATALOG NUMBER: P3AS13R309835DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	325.4
1°	325.4
2°	324.3
3°	322.4
4°	319.8
5°	316.8
6°	313.1
7°	308.3
8°	303.1
9°	297.2
10°	291.3
11°	284.6
12°	277.6
13°	270.2
14°	262.4
15°	254.2
17.5°	233.5
20°	212.7
22.5°	192.7
25°	173.8
27.5°	155.3
30°	137.9
32.5°	120.1
35°	102.3
37.5°	84.9
40°	68.6
42.5°	54.1
45°	41.5
47.5°	30.8
50°	21.5
52.5°	15.2
55°	12.6
57.5°	11.5
60°	10.4
62.5°	9.3
65°	8.2
67.5°	7.0
70°	5.9
72.5°	4.8
75°	4.1
77.5°	3.3
80°	2.6
82.5°	1.9
85°	1.1
87.5°	0.4



TEST NUMBER: P1276094

CATALOG NUMBER: P3AS13R309835DE010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)