

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276131

Luminaire Tested: P3AS13R359835DE010 E3DLP1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1276131
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R359835DE010 E3DLP1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 98CRI , E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 491.0 lumens
Efficiency: N/A
Efficacy: 33.9 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1276131

CATALOG NUMBER: P3AS13R359835DE010 E3DLP1MW

Luminous Intensity Polar Plot

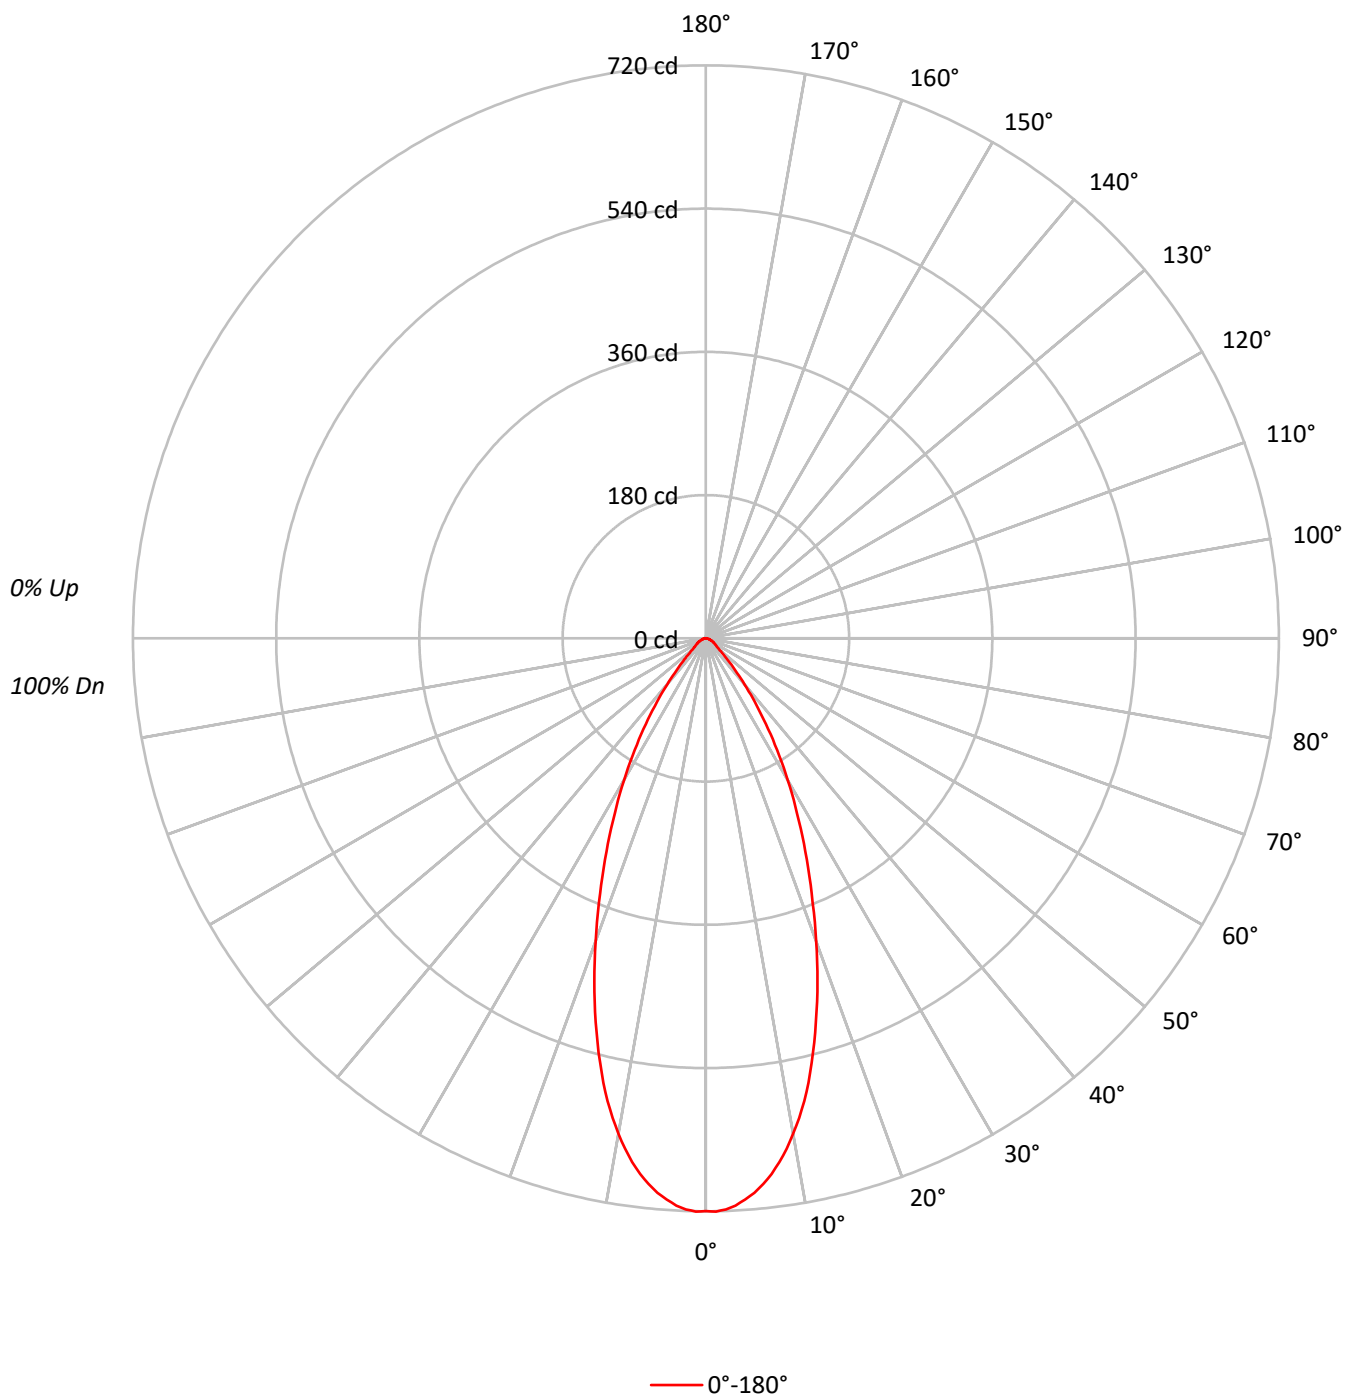

TEST NUMBER: P1276131

CATALOG NUMBER: P3AS13R359835DE010 E3DLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	157816
5°	153929
10°	140723
15°	119456
20°	94555
25°	71520
30°	52059
35°	35202
40°	21641
45°	12435
50°	7471
55°	6079
60°	5307
65°	4722
70°	3847
75°	3813
80°	3788
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12435 cd/sqm

TEST NUMBER: P1276131

CATALOG NUMBER: P3AS13R359835DE010 E3DLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	64.6	13.2
10°-20°	145.1	29.5
20°-30°	135.7	27.6
30°-40°	83.0	16.9
40°-50°	32.7	6.7
50°-60°	14.4	2.9
60°-70°	9.0	1.8
70°-80°	4.8	1.0
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	345.4	70.3
0°-40°	428.4	87.3
0°-60°	475.6	96.9
0°-90°	491.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	491.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	720	
5°	699	65
15°	526	145
25°	296	136
35°	132	83
45°	40	33
55°	16	14
65°	9	9
75°	4	5
85°	2	2
90°	0	

TEST NUMBER: P1276131

CATALOG NUMBER: P3AS13R359835DE010 E3DLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	719.7
1°	720.5
2°	718.2
3°	713.7
4°	706.9
5°	699.3
6°	689.5
7°	678.1
8°	664.5
9°	649.4
10°	632.0
11°	613.9
12°	594.2
13°	573.1
14°	549.6
15°	526.2
17.5°	465.7
20°	405.2
22.5°	347.0
25°	295.6
27.5°	248.0
30°	205.6
32.5°	166.3
35°	131.5
37.5°	100.5
40°	75.6
42.5°	54.4
45°	40.1
47.5°	28.7
50°	21.9
52.5°	18.1
55°	15.9
57.5°	13.6
60°	12.1
62.5°	10.6
65°	9.1
67.5°	7.6
70°	6.0
72.5°	5.3
75°	4.5
77.5°	3.8
80°	3.0
82.5°	2.3
85°	1.5
87.5°	0.8



TEST NUMBER: P1276131
CATALOG NUMBER: P3AS13R359835DE010 E3DLP1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)