

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276160

Luminaire Tested: P3AS13R409835DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1276160
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R409835DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 98CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 273.0 lumens
Efficiency: N/A
Efficacy: 18.8 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1276160

CATALOG NUMBER: P3AS13R409835DE010 E3DLP1GPH

Luminous Intensity Polar Plot

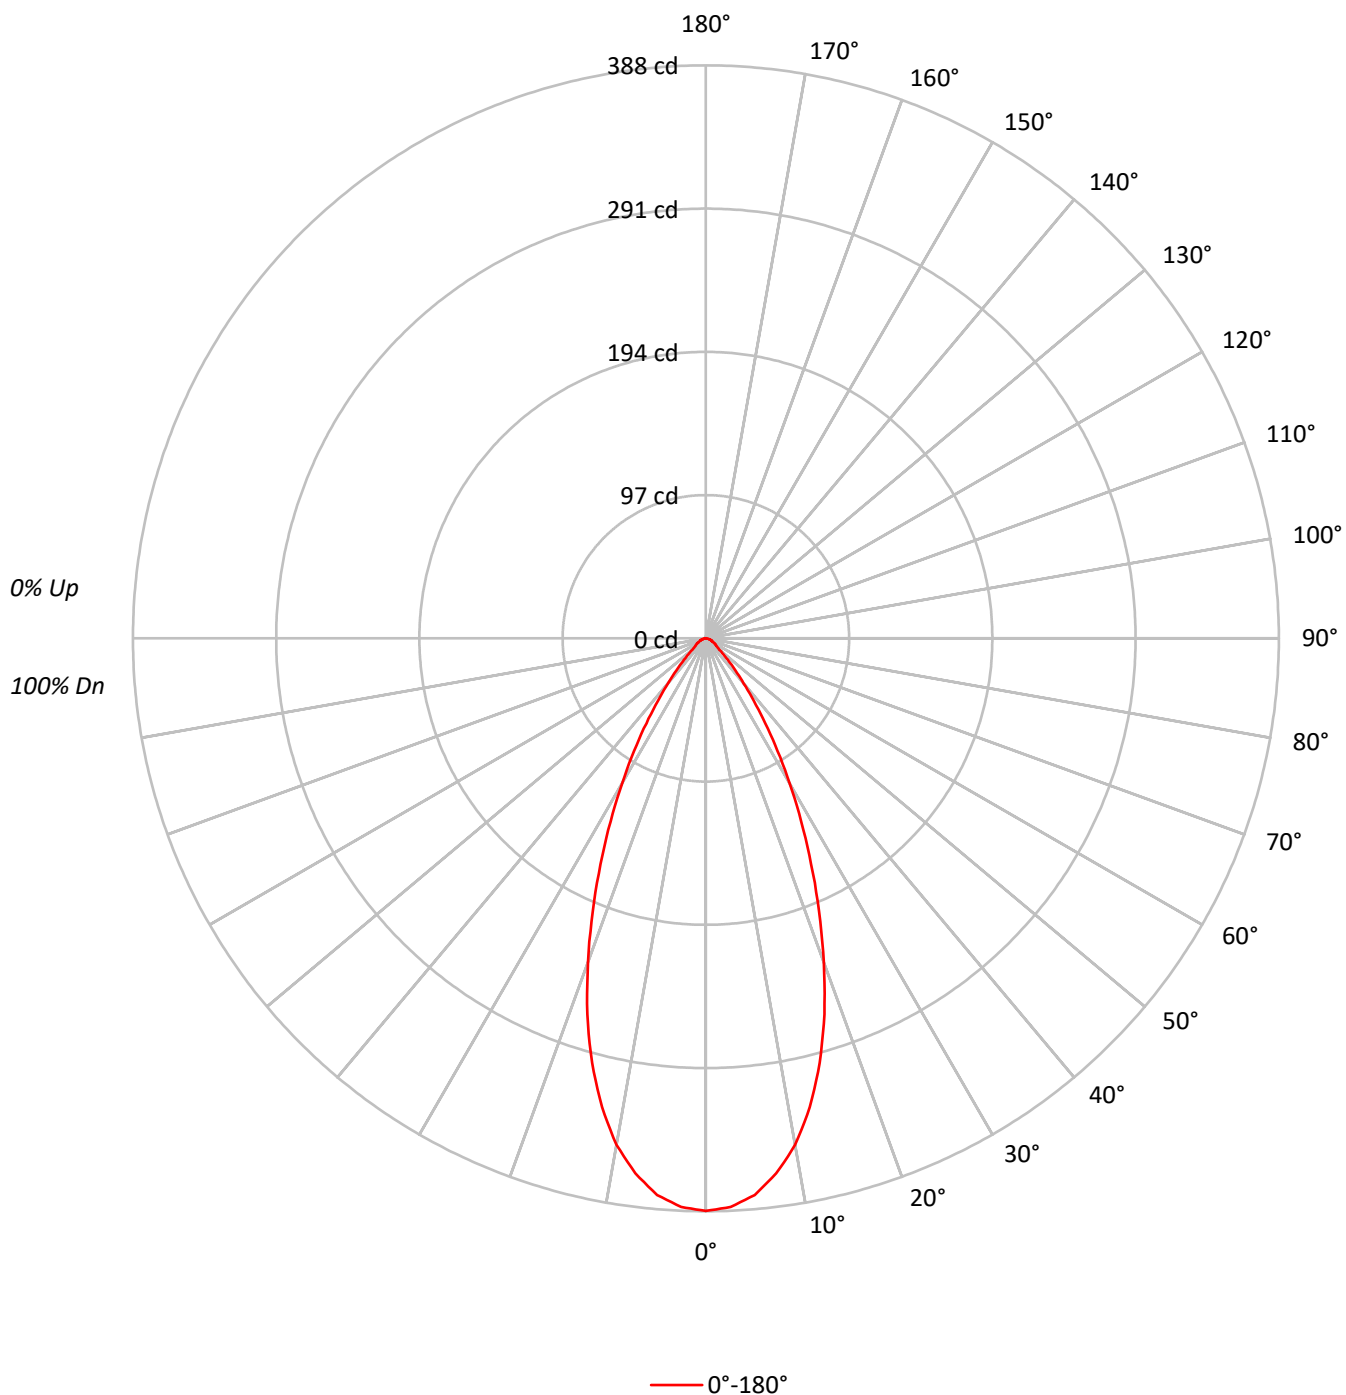

TEST NUMBER: P1276160

CATALOG NUMBER: P3AS13R409835DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	93	97	94	91		94	92	89		92
3	102	95	90	86	100	94	89	85	91	87	84		89	85	83		86
4	97	89	83	79	95	88	83	79	86	81	78		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	78	72	68	76	71	67		75	70	67		73
7	83	74	68	64	82	73	68	64	72	67	63		71	66	63		70
8	79	70	64	60	78	69	64	60	68	63	59		67	63	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	85015
5°	83293
10°	77554
15°	67583
20°	54465
25°	40817
30°	28713
35°	18792
40°	11393
45°	6791
50°	4060
55°	3250
60°	2938
65°	2491
70°	2372
75°	1864
80°	1894
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6791 cd/sqm

TEST NUMBER: P1276160

CATALOG NUMBER: P3AS13R409835DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.1	12.9
10°-20°	82.0	30.0
20°-30°	77.3	28.3
30°-40°	44.7	16.4
40°-50°	17.8	6.5
50°-60°	7.9	2.9
60°-70°	4.9	1.8
70°-80°	2.6	0.9
80°-90°	0.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	194.4	71.2
0°-40°	239.1	87.6
0°-60°	264.8	97.0
0°-90°	273.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	273.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	388	
5°	378	35
15°	298	82
25°	169	77
35°	70	45
45°	22	18
55°	8	8
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1276160

CATALOG NUMBER: P3AS13R409835DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	387.7
2.5°	385.4
5°	378.4
7.5°	365.4
10°	348.3
12.5°	325.2
15°	297.7
17.5°	266.9
20°	233.4
22.5°	200.0
25°	168.7
27.5°	139.8
30°	113.4
32.5°	90.3
35°	70.2
37.5°	53.1
40°	39.8
42.5°	29.7
45°	21.9
47.5°	16.0
50°	11.9
52.5°	9.7
55°	8.5
57.5°	7.8
60°	6.7
62.5°	5.6
65°	4.8
67.5°	4.1
70°	3.7
72.5°	3.0
75°	2.2
77.5°	1.9
80°	1.5
82.5°	1.1
85°	0.7
87.5°	0.4
90°	0.0

(END OF REPORT)