

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276232

Luminaire Tested: P3AS13R559835DE010 E3DL1H

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1276232  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R559835DE010 E3DL1H  
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 98CRI , E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 825.0 lumens  
Efficiency: N/A  
Efficacy: 56.9 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1276232  
CATALOG NUMBER: P3AS13R559835DE010 E3DL1H

### Luminous Intensity Polar Plot

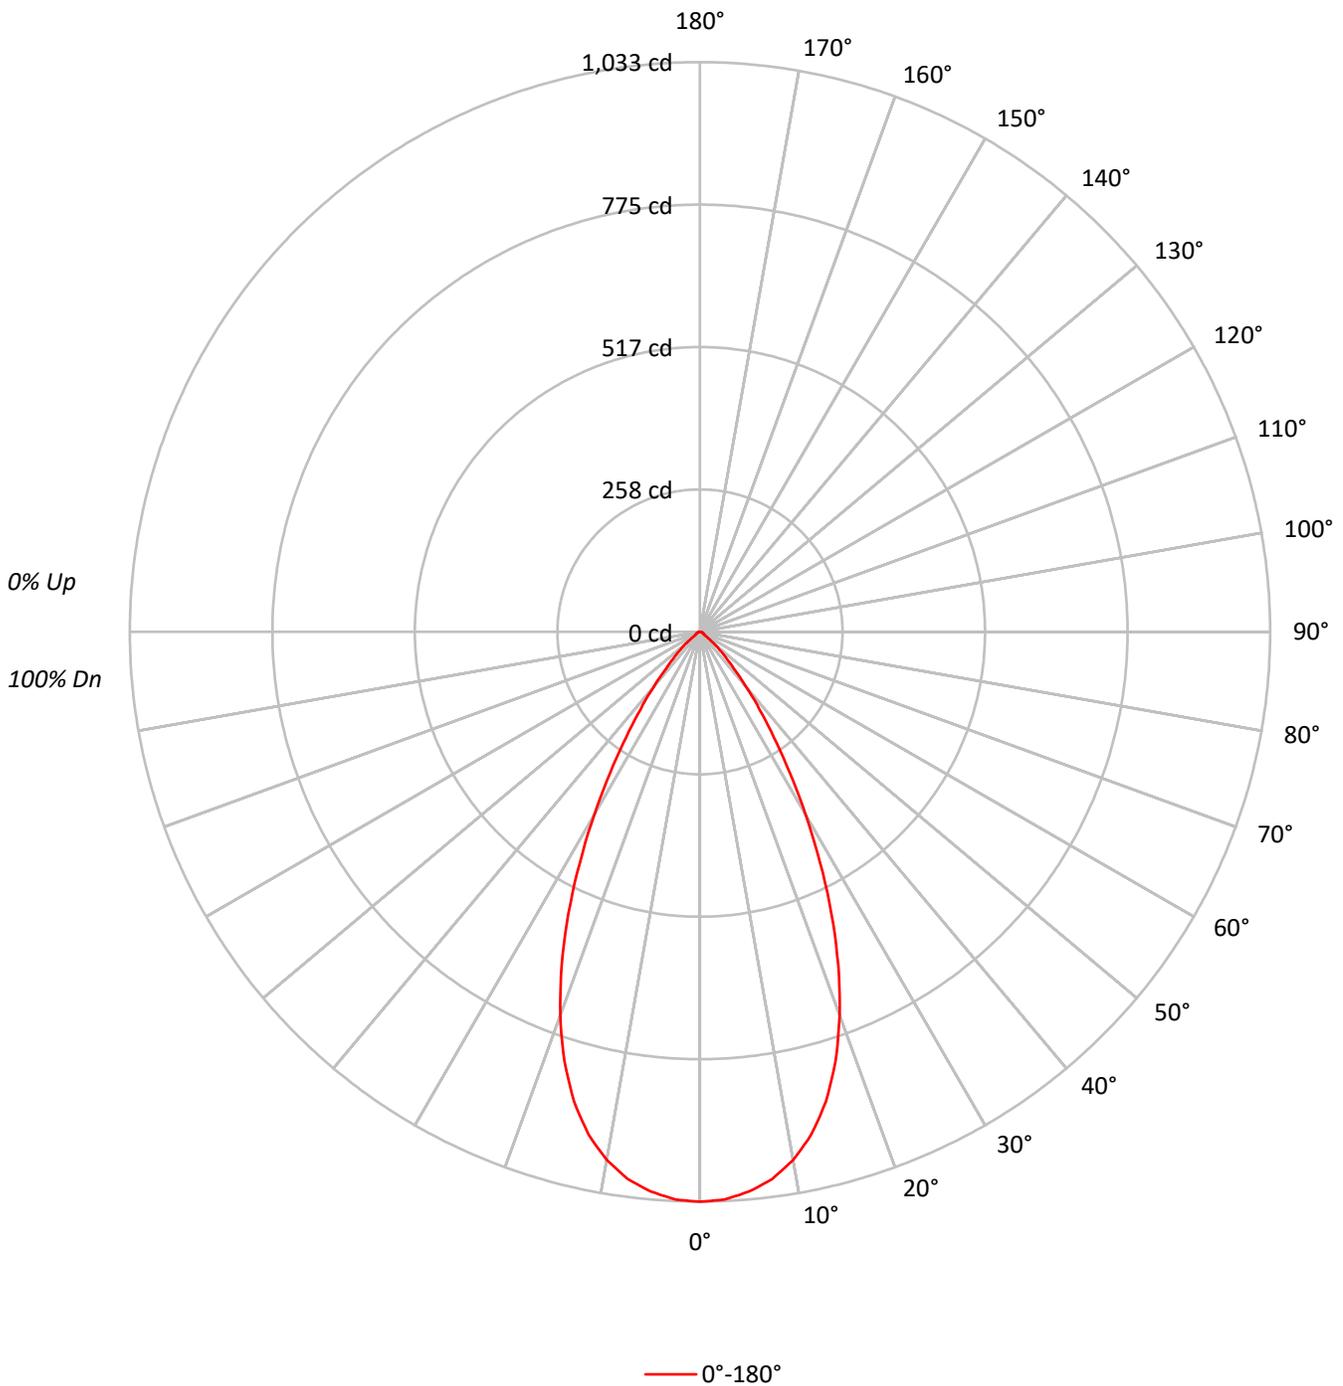



TEST NUMBER: P1276232  
 CATALOG NUMBER: P3AS13R559835DE010 E3DL1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	82	79	77	75			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			
6	88	79	73	69	86	78	73	68	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	70	64	60	69	63	60	67	63	60	67	62	59	58			
9	76	66	61	57	75	66	60	56	65	60	56	64	59	56	63	59	56	55			
10	73	63	57	53	72	62	57	53	62	57	53	61	56	53	60	56	53	52			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	226539
5°	224235
10°	216562
15°	200160
20°	172728
25°	136435
30°	96774
35°	62399
40°	37470
45°	21118
50°	11360
55°	4052
60°	3640
65°	3528
70°	3398
75°	3219
80°	2904
85°	2013

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21118 cd/sqm



TEST NUMBER: P1276232  
 CATALOG NUMBER: P3AS13R559835DE010 E3DL1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	95.8	11.6
10°-20°	243.8	29.6
20°-30°	255.5	31.0
30°-40°	149.1	18.1
40°-50°	55.8	6.8
50°-60°	13.1	1.6
60°-70°	6.8	0.8
70°-80°	4.0	0.5
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	595.2	72.1
0°-40°	744.2	90.2
0°-60°	813.1	98.6
0°-90°	825.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	825.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1033	
5°	1019	96
15°	882	244
25°	564	256
35°	233	149
45°	68	56
55°	11	13
65°	7	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1276232  
CATALOG NUMBER: P3AS13R559835DE010 E3DL1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1033.1
2.5°	1030.1
5°	1018.7
7.5°	1000.6
10°	972.6
12.5°	933.2
15°	881.7
17.5°	816.6
20°	740.2
22.5°	654.7
25°	563.9
27.5°	470.8
30°	382.2
32.5°	302.0
35°	233.1
37.5°	177.1
40°	130.9
42.5°	93.8
45°	68.1
47.5°	49.2
50°	33.3
52.5°	18.9
55°	10.6
57.5°	9.1
60°	8.3
62.5°	7.6
65°	6.8
67.5°	6.1
70°	5.3
72.5°	4.5
75°	3.8
77.5°	3.0
80°	2.3
82.5°	1.5
85°	0.8
87.5°	0.8
90°	0.0

(END OF REPORT)