

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276427

Luminaire Tested: P3AS17R309835DE010 E3CD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1276427
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R309835DE010 E3CD1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 98CRI , E3CD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1561.0 lumens
Efficiency: N/A
Efficacy: 76.5 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1276427

CATALOG NUMBER: P3AS17R309835DE010 E3CD1MW

Luminous Intensity Polar Plot

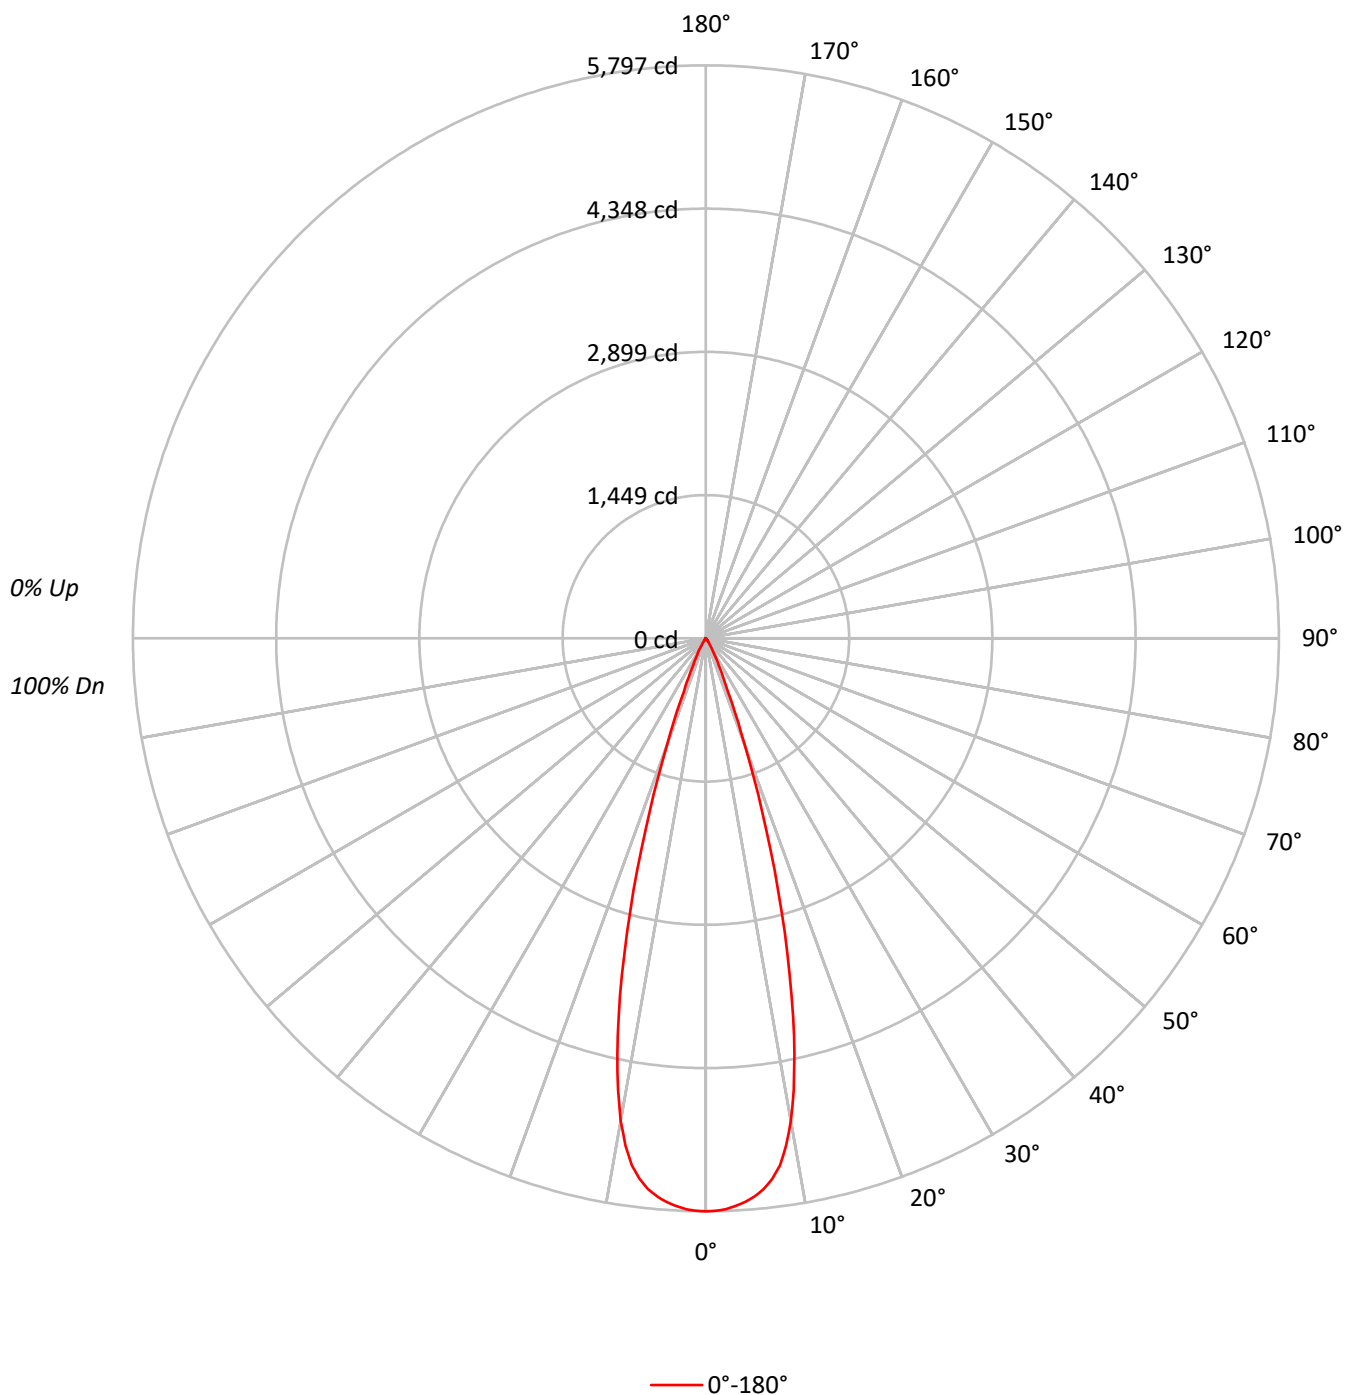

TEST NUMBER: P1276427

CATALOG NUMBER: P3AS17R309835DE010 E3CD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	93	92
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	91	90	89
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	88	87	86
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	85	84	83
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	83	82	81
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	80	79
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	78	77
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	76	75	74
10	89	83	79	76	88	82	78	76	82	78	76	81	78	76	80	77	75	74	73	72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1271170
5°	1247168
10°	1104054
15°	699482
20°	265510
25°	78609
30°	31043
35°	9530
40°	4208
45°	1520
50°	1262
55°	956
60°	1096
65°	1297
70°	769
75°	1017
80°	1515
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1520 cd/sqm

TEST NUMBER: P1276427

CATALOG NUMBER: P3AS17R309835DE010 E3CD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	520.8	33.4
10°-20°	811.7	52.0
20°-30°	188.5	12.1
30°-40°	29.2	1.9
40°-50°	5.0	0.3
50°-60°	2.4	0.2
60°-70°	2.0	0.1
70°-80°	1.3	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1521.0	97.4
0°-40°	1550.2	99.3
0°-60°	1557.6	99.8
0°-90°	1561.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1561.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5797	
5°	5666	521
15°	3081	812
25°	325	188
35°	36	29
45°	5	5
55°	2	2
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1276427

CATALOG NUMBER: P3AS17R309835DE010 E3CD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5797.0
1°	5793.4
2°	5777.4
3°	5750.5
4°	5716.1
5°	5665.9
6°	5603.3
7°	5510.1
8°	5382.6
9°	5195.0
10°	4958.4
11°	4653.1
12°	4308.5
13°	3926.0
14°	3505.4
15°	3081.2
17.5°	2015.7
20°	1137.8
22.5°	581.2
25°	324.9
27.5°	199.9
30°	122.6
32.5°	66.2
35°	35.6
37.5°	23.3
40°	14.7
42.5°	8.6
45°	4.9
47.5°	3.7
50°	3.7
52.5°	2.5
55°	2.5
57.5°	2.5
60°	2.5
62.5°	2.5
65°	2.5
67.5°	1.2
70°	1.2
72.5°	1.2
75°	1.2
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1276427

CATALOG NUMBER: P3AS17R309835DE010 E3CD1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)