

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276633

Luminaire Tested: P3AS17R659835DE010 E3D1WMH

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1276633  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R659835DE010 E3D1WMH  
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 98CRI , E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1463.0 lumens  
Efficiency: N/A  
Efficacy: 71.7 lumens/watt  
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 20.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1276633  
CATALOG NUMBER: P3AS17R659835DE010 E3D1WMH

### Luminous Intensity Polar Plot

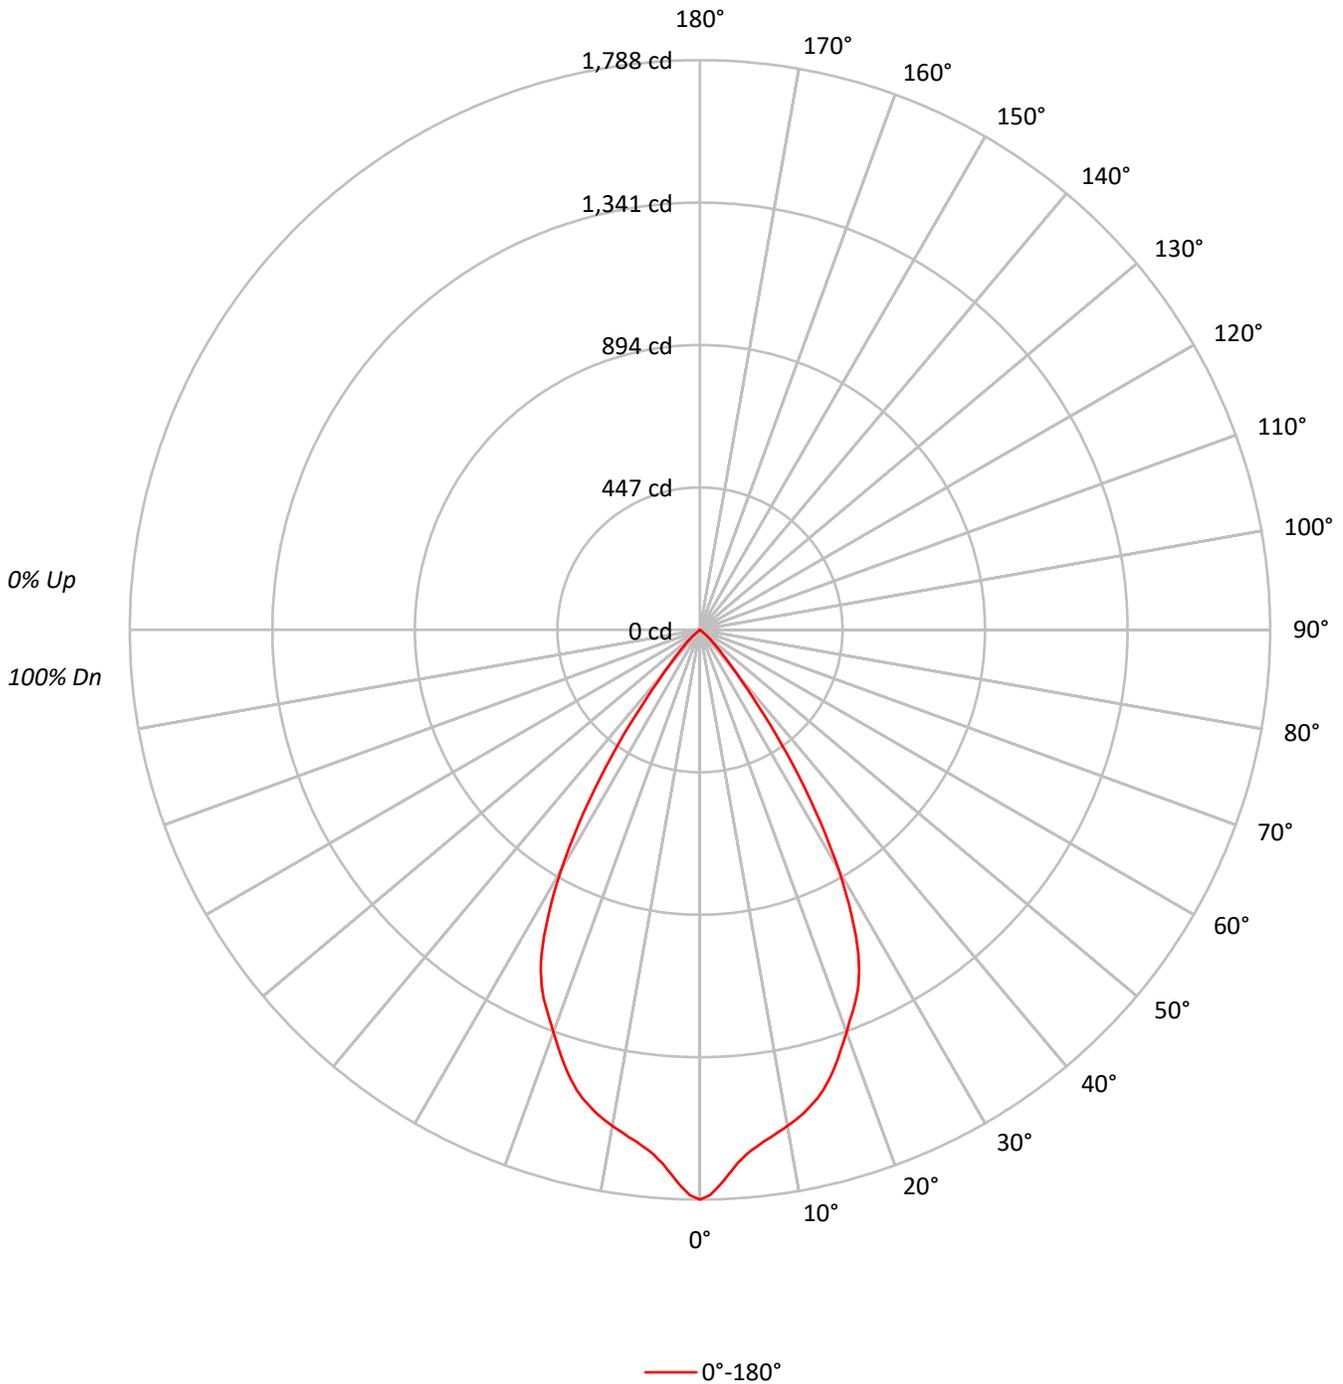



TEST NUMBER: P1276633  
 CATALOG NUMBER: P3AS17R659835DE010 E3D1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94				94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88				88
3	103	97	92	88	101	95	91	88	93	89	86	90	87	85	88	86	83	82				82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77				77
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72				72
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67				67
7	84	75	70	65	83	75	69	65	73	69	65	72	68	65	71	67	64	63				63
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59				59
9	77	67	61	58	76	67	61	57	66	61	57	65	60	57	64	60	57	56				56
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52				52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	392030
5°	364010
10°	352009
15°	339230
20°	313627
25°	285742
30°	220768
35°	127984
40°	50781
45°	21646
50°	5117
55°	688
60°	526
65°	311
70°	385
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21646 cd/sqm



TEST NUMBER: P1276633

CATALOG NUMBER: P3AS17R659835DE010 E3D1WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	156.0	10.7
10°-20°	416.4	28.5
20°-30°	527.0	36.0
30°-40°	300.1	20.5
40°-50°	59.6	4.1
50°-60°	3.1	0.2
60°-70°	0.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1099.3	75.1
0°-40°	1399.4	95.7
0°-60°	1462.1	99.9
0°-90°	1463.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1463.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1788	
5°	1654	156
15°	1494	416
25°	1181	527
35°	478	300
45°	70	60
55°	2	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1276633  
CATALOG NUMBER: P3AS17R659835DE010 E3D1WMH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1787.8
1°	1774.5
2°	1745.7
3°	1712.0
4°	1678.9
5°	1653.7
6°	1635.0
7°	1620.0
8°	1606.8
9°	1593.5
10°	1580.9
11°	1567.1
12°	1552.6
13°	1535.2
14°	1516.6
15°	1494.3
16°	1467.8
17°	1439.0
18°	1407.7
19°	1374.6
20°	1344.0
21°	1312.7
22°	1284.4
23°	1255.0
24°	1220.7
25°	1181.0
26°	1133.5
27°	1076.4
28°	1012.0
29°	943.5
30°	871.9
31°	793.2
32°	715.0
32.5°	674.7
33°	635.6
34°	556.2
35°	478.1
36°	405.9
37°	334.3
37.5°	297.7
38°	268.2
39°	217.1
40°	177.4
42.5°	109.4
45°	69.8



TEST NUMBER: P1276633  
CATALOG NUMBER: P3AS17R659835DE010 E3D1WMH

**CANDELA DISTRIBUTION (continued):**

	0°
47.5°	40.9
50°	15.0
52.5°	3.0
55°	1.8
57.5°	1.2
60°	1.2
62.5°	1.2
65°	0.6
67.5°	0.6
70°	0.6
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)