

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276648

Luminaire Tested: P3AS17R659835DE010 E3DLP1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1276648
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R659835DE010 E3DLP1LI
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 98CRI , E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 850.0 lumens
Efficiency: N/A
Efficacy: 41.7 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1276648

CATALOG NUMBER: P3AS17R659835DE010 E3DLP1LI

Luminous Intensity Polar Plot

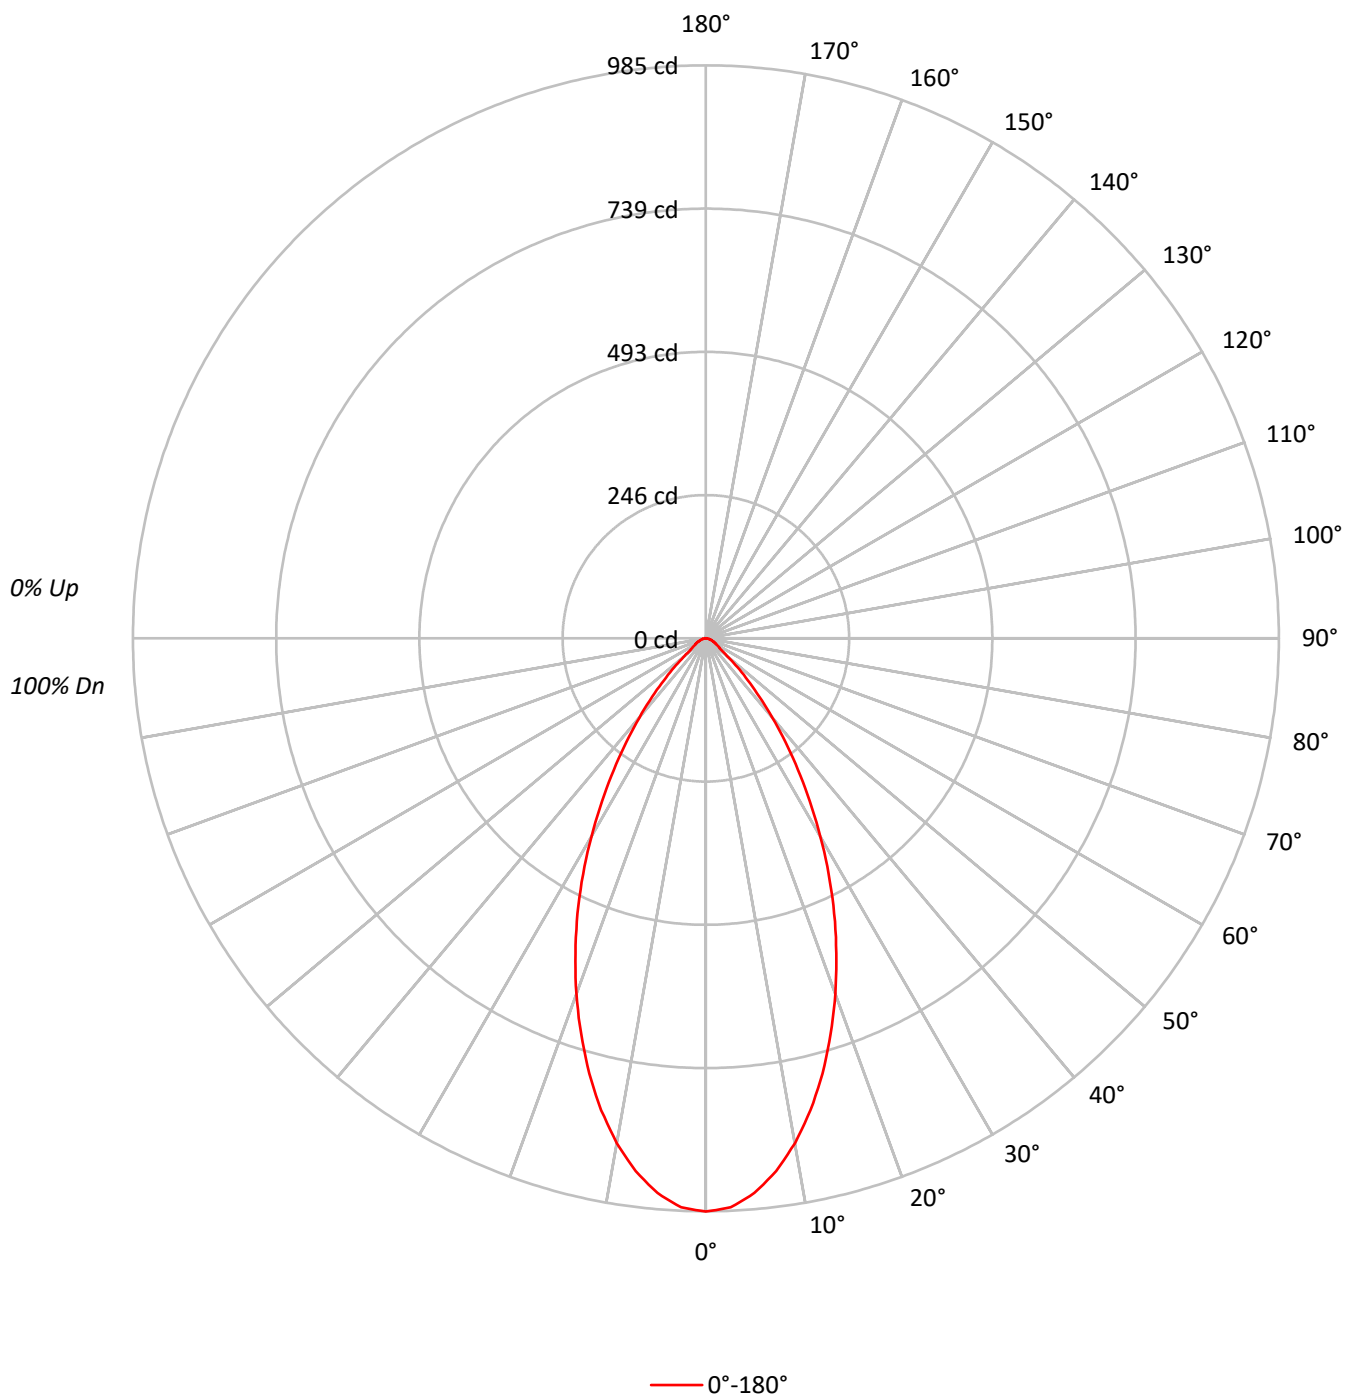

TEST NUMBER: P1276648

CATALOG NUMBER: P3AS17R659835DE010 E3DLP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		92
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		85
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		78
4	95	87	81	76	93	86	80	76	84	79	75		82	78	74		72
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		66
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		62
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		57
8	77	67	60	56	75	66	60	56	65	59	56		64	59	55		54
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		50
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	216057
5°	210675
10°	196189
15°	175824
20°	151843
25°	126322
30°	99610
35°	73803
40°	50867
45°	31538
50°	17125
55°	10781
60°	9122
65°	8250
70°	7052
75°	6270
80°	6188
85°	6290

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 31538 cd/sqm

TEST NUMBER: P1276648

CATALOG NUMBER: P3AS17R659835DE010 E3DLP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.9	10.5
10°-20°	215.2	25.3
20°-30°	238.0	28.0
30°-40°	172.9	20.3
40°-50°	81.0	9.5
50°-60°	27.3	3.2
60°-70°	15.7	1.9
70°-80°	8.2	1.0
80°-90°	2.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	542.2	63.8
0°-40°	715.1	84.1
0°-60°	823.3	96.9
0°-90°	850.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	850.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	985	
5°	957	89
15°	774	215
25°	522	238
35°	276	173
45°	102	81
55°	28	27
65°	16	16
75°	7	8
85°	2	3
90°	0	

TEST NUMBER: P1276648

CATALOG NUMBER: P3AS17R659835DE010 E3DLP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	985.3
2.5°	979.2
5°	957.1
7.5°	924.0
10°	881.1
12.5°	830.9
15°	774.5
17.5°	713.2
20°	650.7
22.5°	585.8
25°	522.1
27.5°	457.1
30°	393.4
32.5°	332.1
35°	275.7
37.5°	224.3
40°	177.7
42.5°	136.0
45°	101.7
47.5°	73.5
50°	50.2
52.5°	34.3
55°	28.2
57.5°	24.5
60°	20.8
62.5°	18.4
65°	15.9
67.5°	13.5
70°	11.0
72.5°	9.8
75°	7.4
77.5°	6.1
80°	4.9
82.5°	3.7
85°	2.5
87.5°	1.2
90°	0.0

(END OF REPORT)