

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276733

Luminaire Tested: P3AS20R209835D010 E3PHLD1MW

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1276733  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS20R209835D010 E3PHLD1MW  
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 98CRI , E3PHLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1097.0 lumens  
Efficiency: N/A  
Efficacy: 40.0 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.68  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 27.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1276733

CATALOG NUMBER: P3AS20R209835D010 E3PHLD1MW

### Luminous Intensity Polar Plot

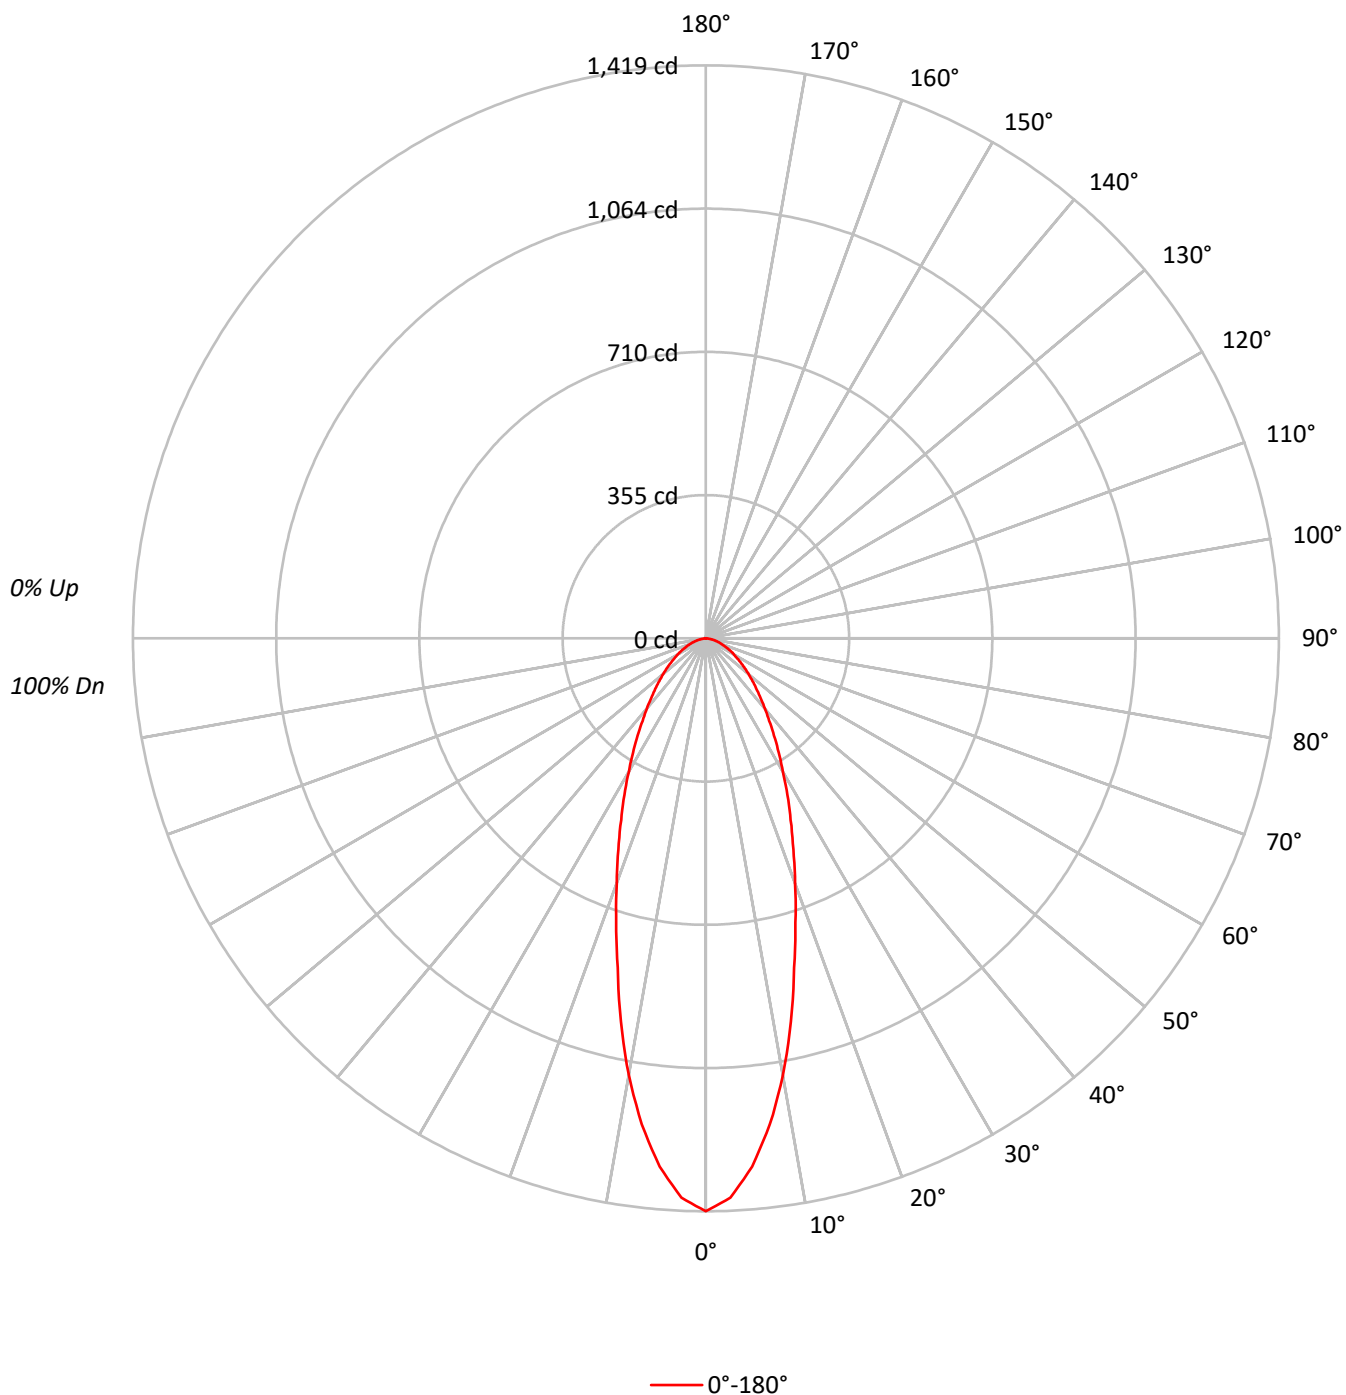

TEST NUMBER: P1276733

CATALOG NUMBER: P3AS20R209835D010 E3PHLD1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 101 | 102 | 100 | 97  |  | 98  | 96  | 95  |  | 95  |
| 2   | 104 | 98  | 93  | 89  | 102 | 96  | 92  | 88  | 93  | 89  | 86  |  | 90  | 87  | 84  |  | 87  |
| 3   | 98  | 90  | 83  | 78  | 95  | 88  | 82  | 78  | 85  | 81  | 77  |  | 83  | 79  | 75  |  | 80  |
| 4   | 92  | 82  | 75  | 70  | 90  | 81  | 75  | 70  | 79  | 73  | 69  |  | 77  | 72  | 68  |  | 75  |
| 5   | 86  | 76  | 69  | 64  | 84  | 75  | 68  | 63  | 73  | 67  | 63  |  | 71  | 66  | 62  |  | 70  |
| 6   | 81  | 70  | 63  | 58  | 79  | 70  | 63  | 58  | 68  | 62  | 58  |  | 66  | 61  | 57  |  | 65  |
| 7   | 76  | 66  | 59  | 54  | 75  | 65  | 58  | 53  | 63  | 58  | 53  |  | 62  | 57  | 53  |  | 61  |
| 8   | 72  | 61  | 54  | 50  | 71  | 61  | 54  | 50  | 60  | 54  | 49  |  | 58  | 53  | 49  |  | 57  |
| 9   | 69  | 58  | 51  | 46  | 67  | 57  | 51  | 46  | 56  | 50  | 46  |  | 55  | 50  | 46  |  | 54  |
| 10  | 65  | 54  | 48  | 43  | 64  | 54  | 48  | 43  | 53  | 47  | 43  |  | 52  | 47  | 43  |  | 51  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 311115 |
| 5°  | 289015 |
| 10° | 244729 |
| 15° | 191579 |
| 20° | 150770 |
| 25° | 120176 |
| 30° | 96648  |
| 35° | 78782  |
| 40° | 65151  |
| 45° | 54920  |
| 50° | 47077  |
| 55° | 40448  |
| 60° | 35304  |
| 65° | 31028  |
| 70° | 26543  |
| 75° | 23384  |
| 80° | 17426  |
| 85° | 11573  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 54920 cd/sqm

TEST NUMBER: P1276733

CATALOG NUMBER: P3AS20R209835D010 E3PHLD1MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 118.5  | 10.8      |
| 10°-20°   | 236.2  | 21.5      |
| 20°-30°   | 229.4  | 20.9      |
| 30°-40°   | 185.3  | 16.9      |
| 40°-50°   | 137.8  | 12.6      |
| 50°-60°   | 95.7   | 8.7       |
| 60°-70°   | 60.0   | 5.5       |
| 70°-80°   | 29.1   | 2.7       |
| 80°-90°   | 5.0    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 584.2  | 53.3      |
| 0°-40°    | 769.5  | 70.1      |
| 0°-60°    | 1003.0 | 91.4      |
| 0°-90°    | 1097.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1097.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1419 |      |
| 5°  | 1313 | 119  |
| 15° | 844  | 236  |
| 25° | 497  | 229  |
| 35° | 294  | 185  |
| 45° | 177  | 138  |
| 55° | 106  | 96   |
| 65° | 60   | 60   |
| 75° | 28   | 29   |
| 85° | 5    | 5    |
| 90° | 0    |      |

TEST NUMBER: P1276733

CATALOG NUMBER: P3AS20R209835D010 E3PHLD1MW

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1418.8 |
| 2.5°  | 1386.6 |
| 5°    | 1313.0 |
| 7.5°  | 1214.1 |
| 10°   | 1099.1 |
| 12.5° | 972.7  |
| 15°   | 843.9  |
| 17.5° | 738.1  |
| 20°   | 646.1  |
| 22.5° | 565.7  |
| 25°   | 496.7  |
| 27.5° | 436.9  |
| 30°   | 381.7  |
| 32.5° | 335.7  |
| 35°   | 294.3  |
| 37.5° | 257.5  |
| 40°   | 227.6  |
| 42.5° | 200.1  |
| 45°   | 177.1  |
| 47.5° | 156.4  |
| 50°   | 138.0  |
| 52.5° | 121.9  |
| 55°   | 105.8  |
| 57.5° | 92.0   |
| 60°   | 80.5   |
| 62.5° | 71.3   |
| 65°   | 59.8   |
| 67.5° | 50.6   |
| 70°   | 41.4   |
| 72.5° | 34.5   |
| 75°   | 27.6   |
| 77.5° | 20.7   |
| 80°   | 13.8   |
| 82.5° | 6.9    |
| 85°   | 4.6    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)