

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276805

Luminaire Tested: P3AS20R359835D010 E3D1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1276805
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R359835D010 E3D1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 98CRI , E3D1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2024.0 lumens
Efficiency: N/A
Efficacy: 73.9 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1276805

CATALOG NUMBER: P3AS20R359835D010 E3D1MW

Luminous Intensity Polar Plot

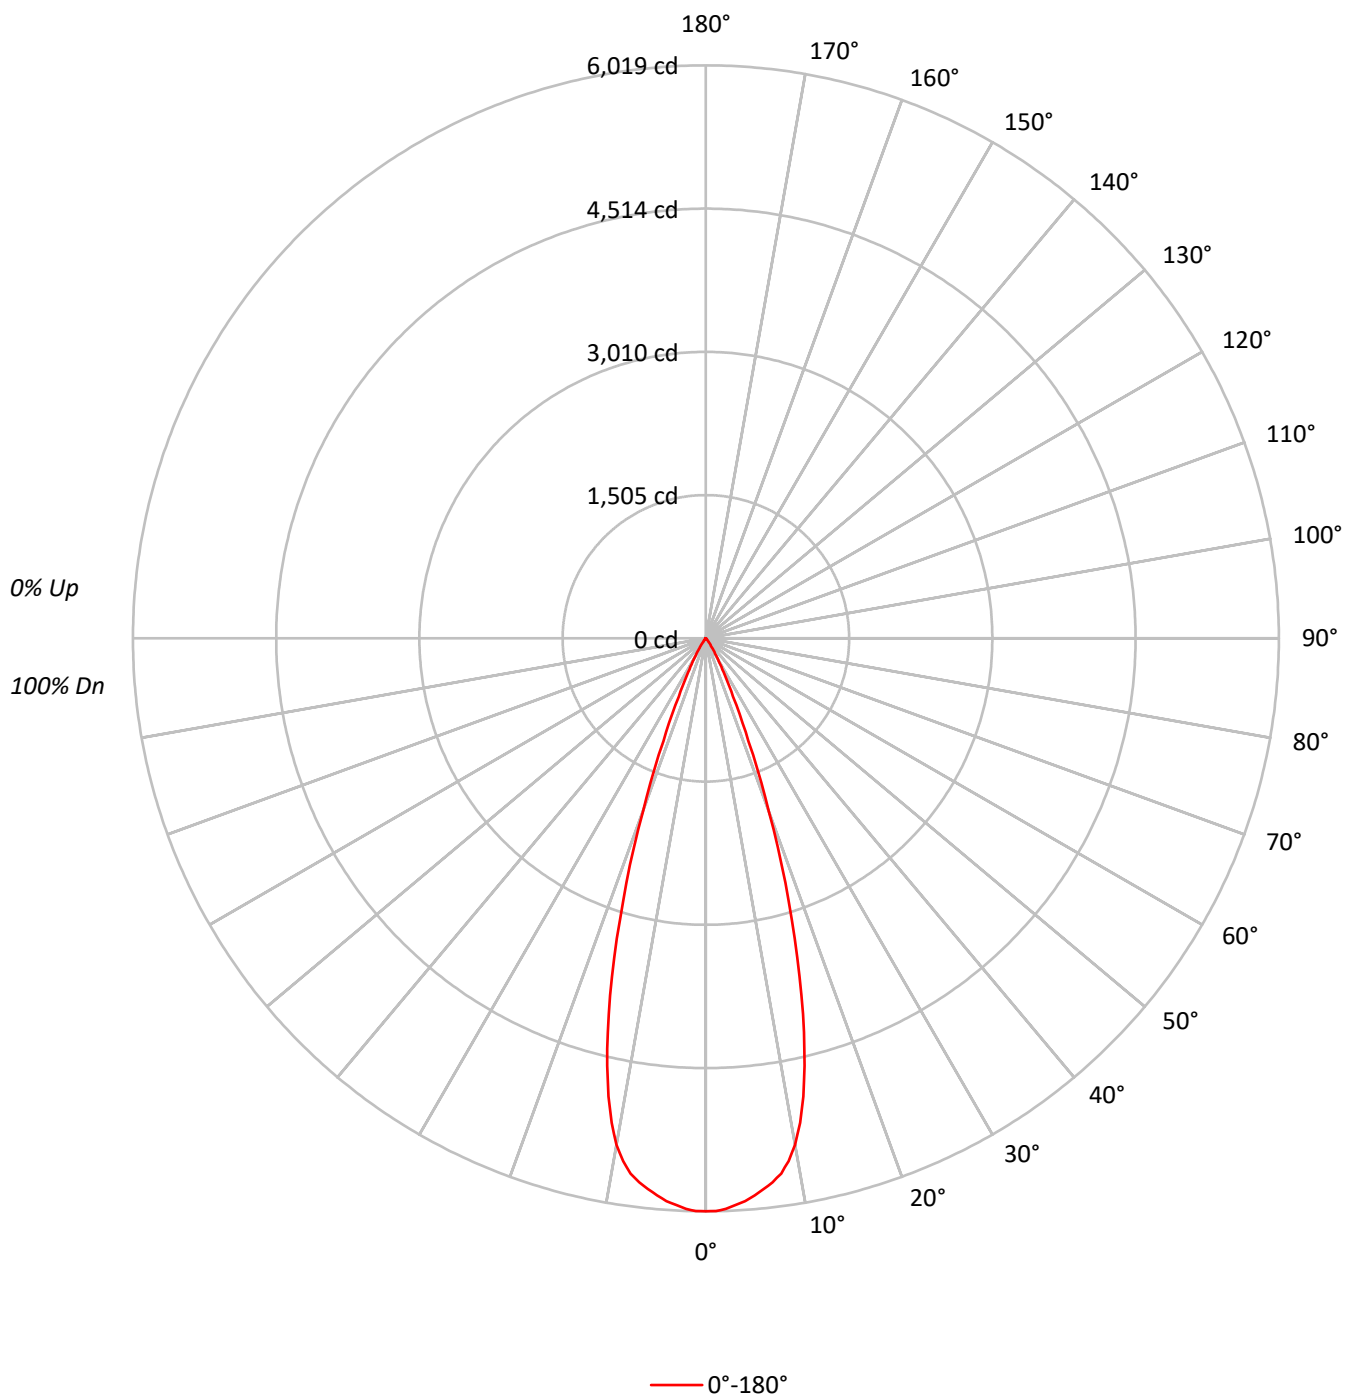

TEST NUMBER: P1276805

CATALOG NUMBER: P3AS20R359835D010 E3D1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		112	110	109	107		106	105	104		103	102	101		99	99	98
2	111	107	104	101		109	105	103	100		102	100	98		99	98	96		97	95	94
3	107	102	98	95		105	101	97	95		98	96	93		96	94	92		94	92	90
4	104	98	94	91		102	97	93	90		95	92	89		93	90	88		91	89	87
5	100	94	90	87		99	93	89	86		92	88	86		90	87	85		89	86	84
6	97	91	86	83		96	90	86	83		89	85	82		87	84	82		86	83	81
7	94	87	83	80		93	87	83	80		86	82	79		85	81	79		84	81	79
8	91	84	80	77		90	84	80	77		83	79	77		82	79	76		81	78	76
9	89	82	77	74		88	81	77	74		80	77	74		80	76	74		79	76	74
10	86	79	75	72		85	79	75	72		78	74	72		77	74	72		77	74	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1319785
5°	1292887
10°	1202783
15°	881821
20°	451539
25°	162735
30°	63352
35°	22192
40°	9131
45°	2481
50°	2183
55°	2447
60°	2105
65°	1660
70°	2052
75°	2711
80°	2020
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 75°
Luminance: 2711 cd/sqm

TEST NUMBER: P1276805

CATALOG NUMBER: P3AS20R359835D010 E3D1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	547.6	27.1
10°-20°	1027.4	50.8
20°-30°	363.7	18.0
30°-40°	63.7	3.1
40°-50°	9.3	0.5
50°-60°	5.2	0.3
60°-70°	3.8	0.2
70°-80°	2.7	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1938.7	95.8
0°-40°	2002.4	98.9
0°-60°	2016.9	99.6
0°-90°	2024.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2024.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6019	
5°	5874	548
15°	3884	1027
25°	673	364
35°	83	64
45°	8	9
55°	6	5
65°	3	4
75°	3	3
85°	0	1
90°	0	

TEST NUMBER: P1276805

CATALOG NUMBER: P3AS20R359835D010 E3D1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	6018.7
1°	6017.1
2°	5998.0
3°	5961.3
4°	5927.8
5°	5873.6
6°	5817.9
7°	5755.7
8°	5679.2
9°	5559.6
10°	5401.8
11°	5183.5
12°	4920.5
13°	4608.1
14°	4263.8
15°	3884.4
17.5°	2893.0
20°	1935.0
22.5°	1166.8
25°	672.6
27.5°	401.7
30°	250.2
32.5°	145.0
35°	82.9
37.5°	52.6
40°	31.9
42.5°	15.9
45°	8.0
47.5°	6.4
50°	6.4
52.5°	6.4
55°	6.4
57.5°	4.8
60°	4.8
62.5°	4.8
65°	3.2
67.5°	3.2
70°	3.2
72.5°	3.2
75°	3.2
77.5°	1.6
80°	1.6
82.5°	1.6
85°	0.0
87.5°	0.0



TEST NUMBER: P1276805
CATALOG NUMBER: P3AS20R359835D010 E3D1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)