

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1276834

Luminaire Tested: P3AS20R409835D010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1276834
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R409835D010 E3D1LI
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 98CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2232.0 lumens
Efficiency: N/A
Efficacy: 81.5 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1276834

CATALOG NUMBER: P3AS20R409835D010 E3D1LI

Luminous Intensity Polar Plot

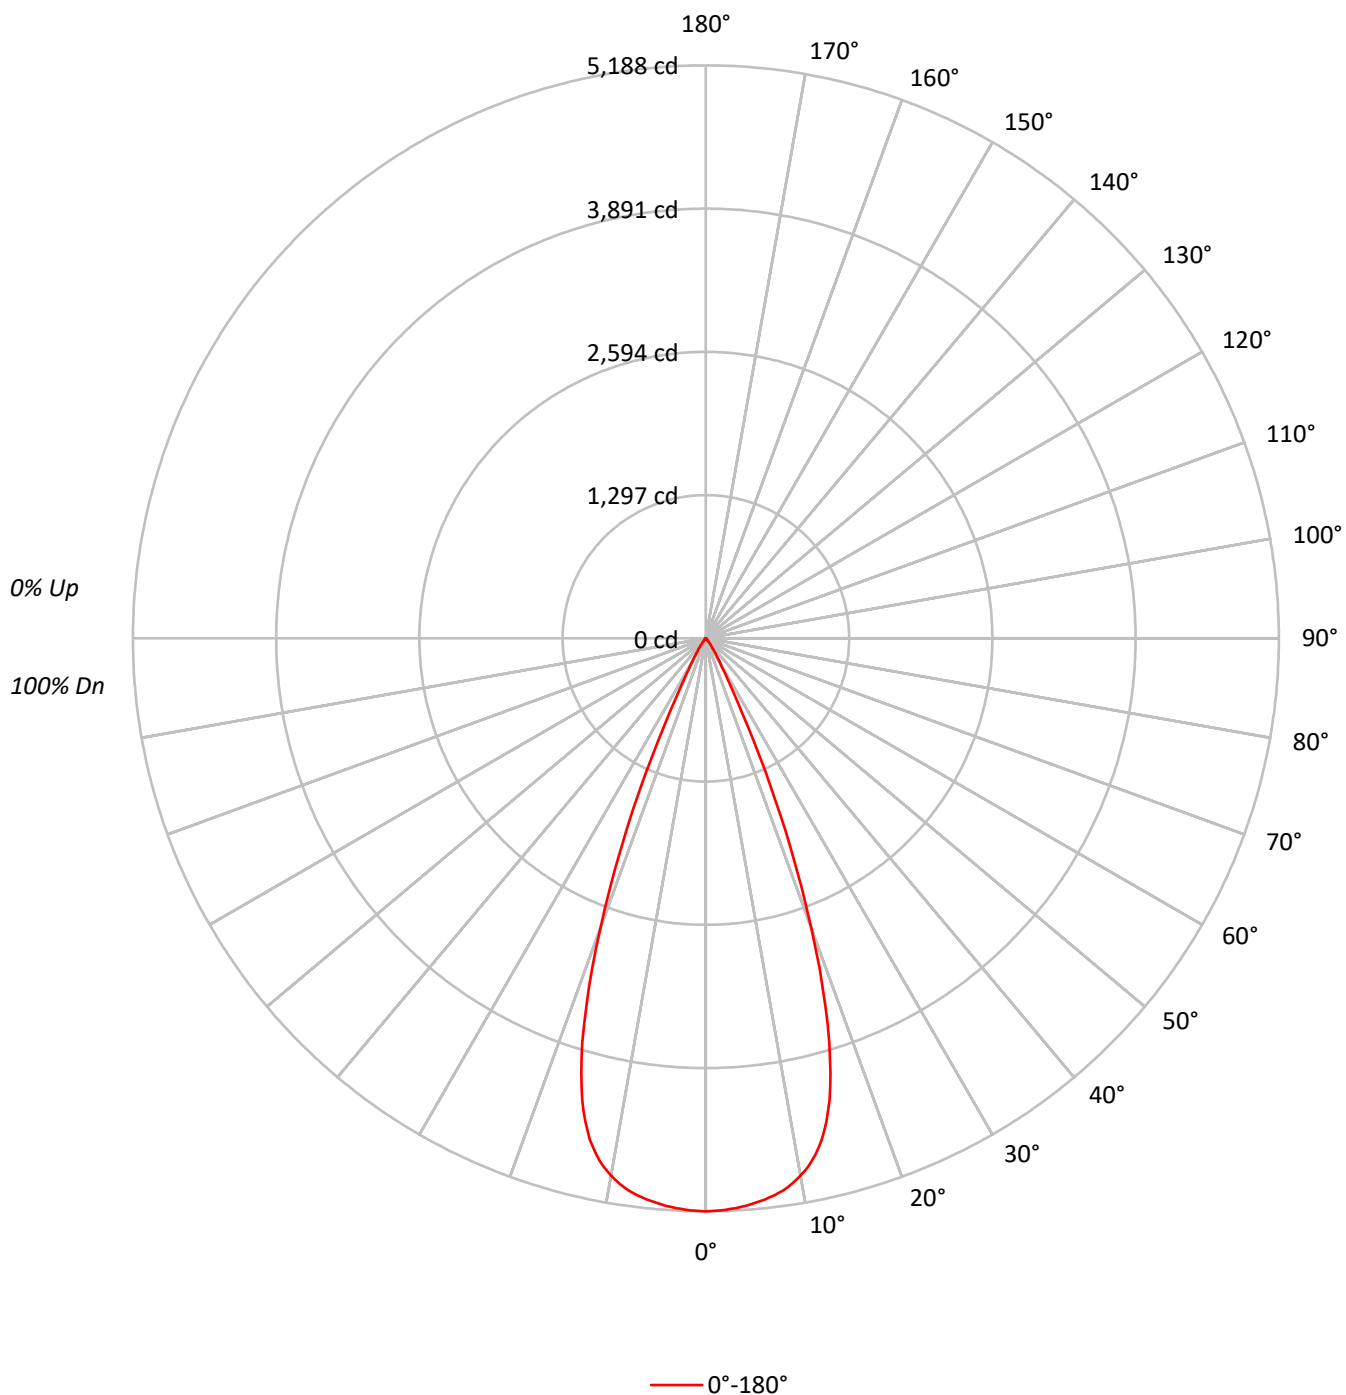

TEST NUMBER: P1276834

CATALOG NUMBER: P3AS20R409835D010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	112	110	109		112	110	109	107		106	105	104		103	102	101		99	98	98
2	111	107	104	101		109	105	102	100		102	100	98		99	97	96		96	95	94
3	107	102	98	95		105	100	97	94		98	95	93		96	93	91		93	91	90
4	103	97	93	90		101	96	92	89		94	91	88		92	89	87		90	88	86
5	99	93	89	85		98	92	88	85		91	87	84		89	86	84		88	85	83
6	96	89	85	81		95	89	84	81		87	83	81		86	83	80		85	82	80
7	93	86	81	78		92	85	81	78		84	80	77		83	80	77		82	79	77
8	90	83	78	75		89	82	78	75		81	77	75		80	77	74		79	76	74
9	87	80	75	72		86	79	75	72		78	75	72		78	74	72		77	74	71
10	84	77	72	70		83	77	72	69		76	72	69		75	72	69		74	71	69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1137694
5°	1129493
10°	1099935
15°	982526
20°	651500
25°	244079
30°	65301
35°	25511
40°	9160
45°	4373
50°	1330
55°	612
60°	351
65°	415
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4373 cd/sqm

TEST NUMBER: P1276834

CATALOG NUMBER: P3AS20R409835D010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	484.2	21.7
10°-20°	1146.8	51.4
20°-30°	520.1	23.3
30°-40°	67.4	3.0
40°-50°	11.7	0.5
50°-60°	1.4	0.1
60°-70°	0.5	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2151.1	96.4
0°-40°	2218.5	99.4
0°-60°	2231.6	100.0
0°-90°	2232.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2232.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5188	
5°	5131	484
15°	4328	1147
25°	1009	520
35°	95	67
45°	14	12
55°	2	1
65°	1	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1276834

CATALOG NUMBER: P3AS20R409835D010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	5188.3
1°	5185.2
2°	5177.4
3°	5165.7
4°	5150.8
5°	5131.3
6°	5108.6
7°	5080.5
8°	5046.1
9°	4999.2
10°	4939.9
11°	4870.3
12°	4777.3
13°	4662.5
14°	4512.4
15°	4328.0
16°	4092.8
17°	3824.8
18°	3502.9
19°	3163.0
20°	2791.9
21°	2420.7
22°	2055.0
23°	1690.9
24°	1333.0
25°	1008.8
26°	747.0
27°	547.0
28°	411.0
29°	319.6
30°	257.9
31°	213.3
32°	178.2
32.5°	162.5
33°	146.9
34°	119.6
35°	95.3
36°	75.0
37°	59.4
37.5°	53.1
38°	46.9
39°	39.1
40°	32.0
42.5°	21.1
45°	14.1

TEST NUMBER: P1276834

CATALOG NUMBER: P3AS20R409835D010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	8.6
50°	3.9
52.5°	1.6
55°	1.6
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.8
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)