

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281085

Luminaire Tested: P3AS05R20B2750DE010 E3DLD1WMH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281085
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R20B2750DE010 E3DLD1WMH_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R20 optic, 4000K CCT AND, 80CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 313.0 lumens
Efficiency: N/A
Efficacy: 53.1 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281085

CATALOG NUMBER: P3AS05R20B2750DE010 E3DLD1WMH_4000K

Luminous Intensity Polar Plot

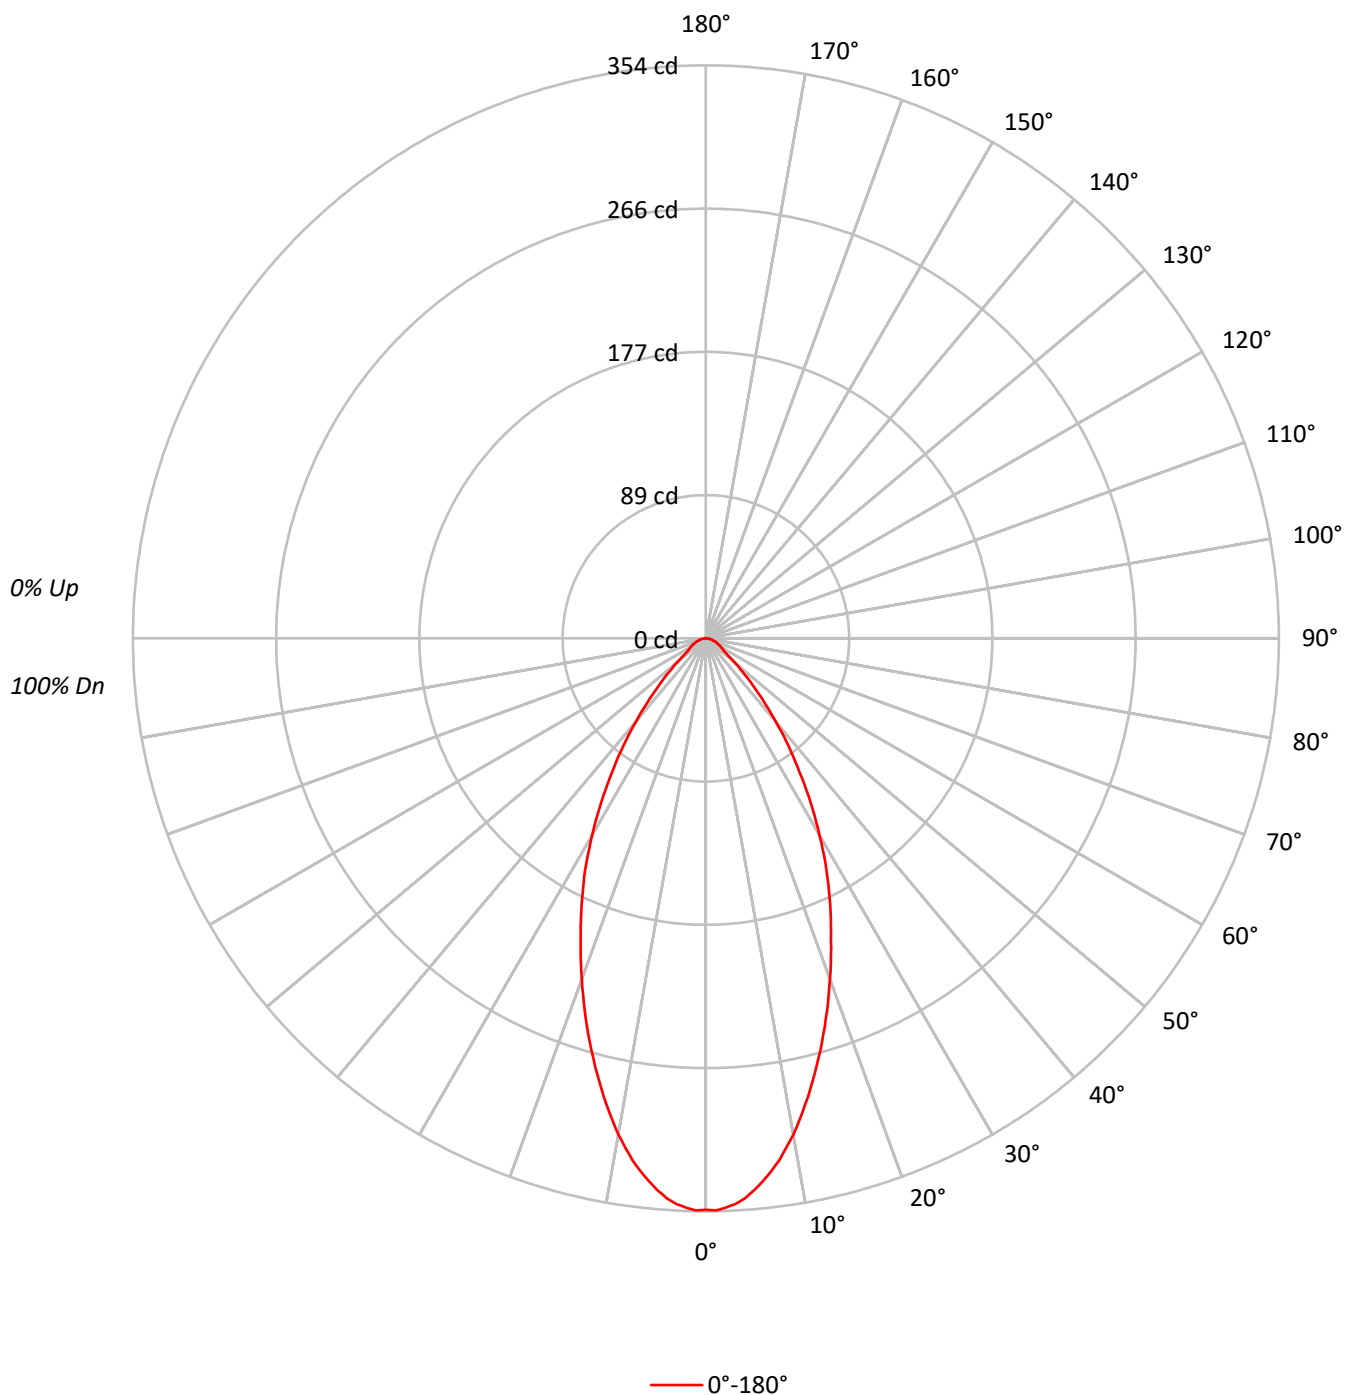

TEST NUMBER: P1281085

CATALOG NUMBER: P3AS05R20B2750DE010 E3DLD1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	86	79	75	92	85	79	74	82	77	73		80	76	72		78
5	89	80	73	68	87	79	73	68	77	71	67		75	70	67		73
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61
9	72	61	55	50	70	61	55	50	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		56	50	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	77428
5°	75346
10°	69315
15°	61022
20°	52318
25°	43962
30°	35550
35°	27037
40°	19236
45°	12714
50°	7880
55°	5161
60°	4693
65°	4307
70°	4103
75°	3728
80°	3536
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12714 cd/sqm

TEST NUMBER: P1281085

CATALOG NUMBER: P3AS05R20B2750DE010 E3DLD1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	31.7	10.1
10°-20°	74.8	23.9
20°-30°	83.1	26.5
30°-40°	63.4	20.2
40°-50°	32.5	10.4
50°-60°	13.3	4.3
60°-70°	8.3	2.7
70°-80°	4.7	1.5
80°-90°	1.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	189.5	60.5
0°-40°	252.9	80.8
0°-60°	298.7	95.4
0°-90°	313.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	313.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	353	
5°	342	32
15°	269	75
25°	182	83
35°	101	63
45°	41	32
55°	14	13
65°	8	8
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P1281085

CATALOG NUMBER: P3AS05R20B2750DE010 E3DLD1WMH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	353.1
1°	353.5
2°	351.9
3°	349.9
4°	346.7
5°	342.3
6°	337.2
7°	331.6
8°	325.6
9°	318.5
10°	311.3
12.5°	290.6
15°	268.8
17.5°	246.5
20°	224.2
22.5°	202.0
25°	181.7
27.5°	161.4
30°	140.4
32.5°	120.5
35°	101.0
37.5°	83.9
40°	67.2
42.5°	52.9
45°	41.0
47.5°	31.0
50°	23.1
52.5°	17.1
55°	13.5
57.5°	12.3
60°	10.7
62.5°	9.5
65°	8.3
67.5°	7.2
70°	6.4
72.5°	5.2
75°	4.4
77.5°	3.6
80°	2.8
82.5°	2.0
85°	1.2
87.5°	0.4
90°	0.0

(END OF REPORT)