

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281208

Luminaire Tested: P3AS05R25B2750DE010 E3DLD1MW_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281208
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R25B2750DE010 E3DLD1MW_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R25 optic, 3000K CCT AND, 90CRI , E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 314.0 lumens
Efficiency: N/A
Efficacy: 53.2 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281208

CATALOG NUMBER: P3AS05R25B2750DE010 E3DLD1MW_3000K

Luminous Intensity Polar Plot

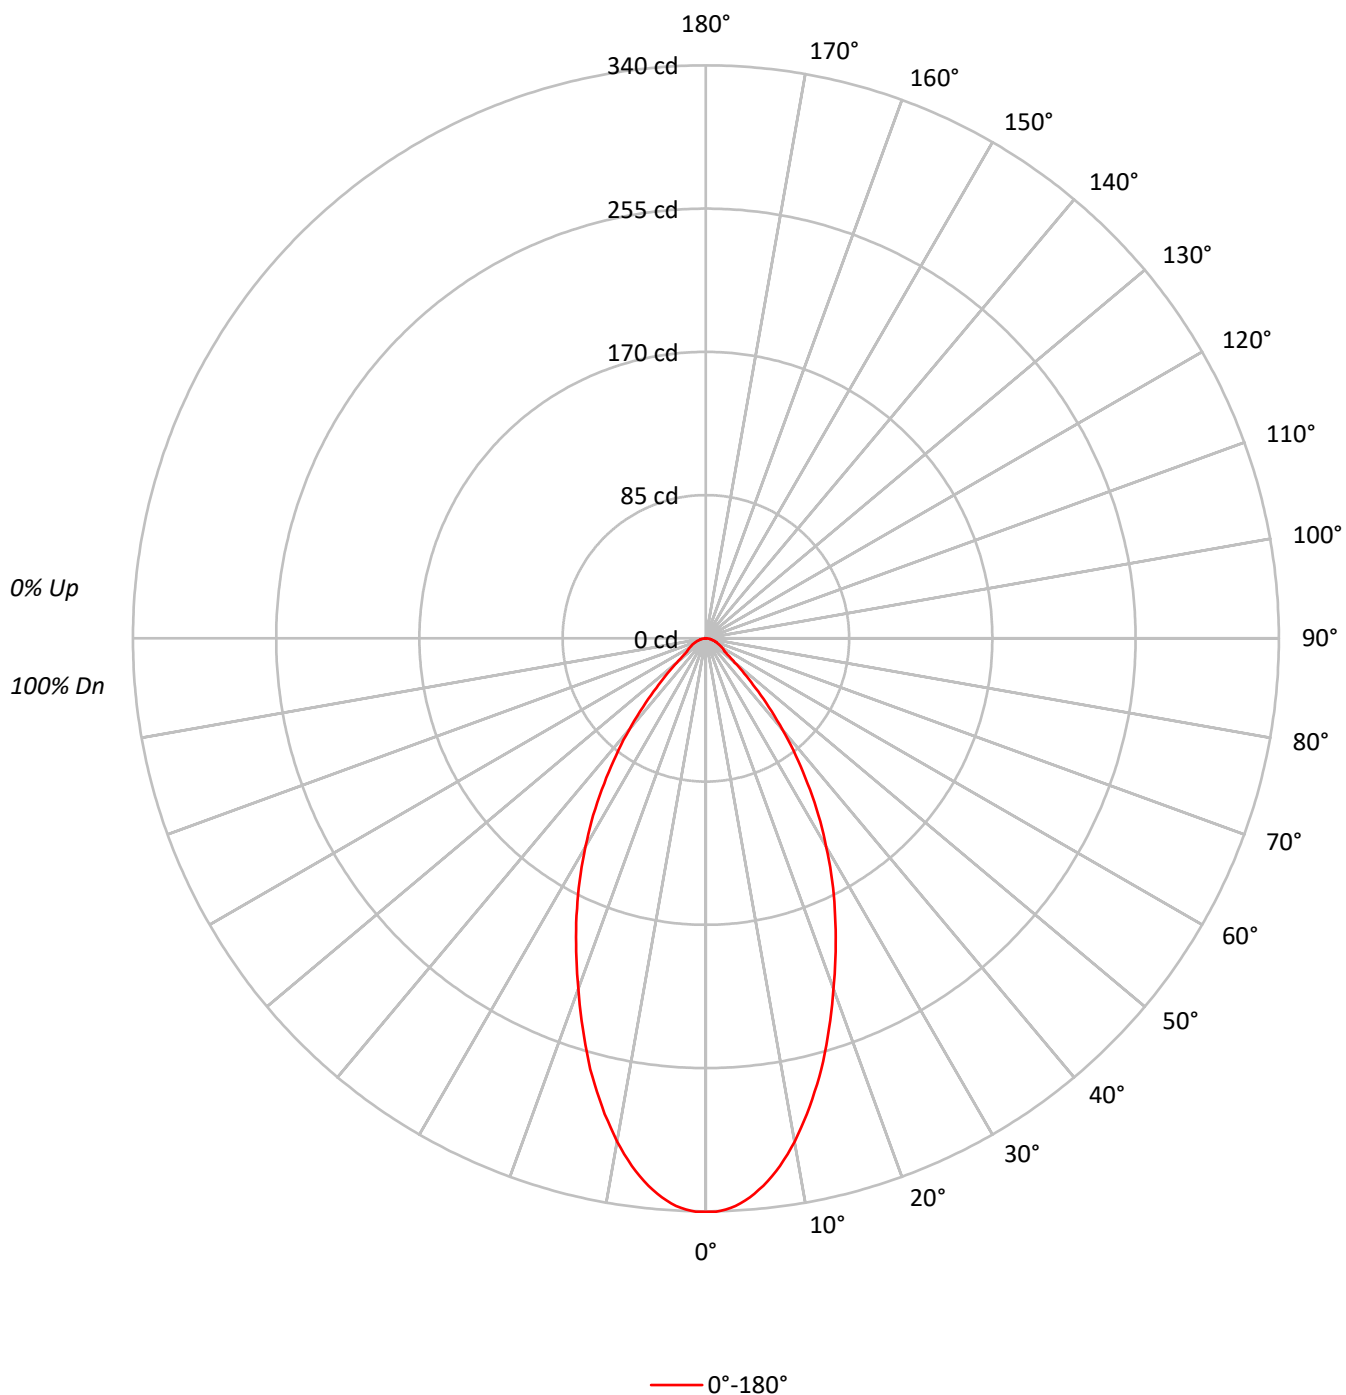

TEST NUMBER: P1281208

CATALOG NUMBER: P3AS05R25B2750DE010 E3DLD1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96	94	93	91
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89	87	85	83
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83	80	78	76
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69	64	61	59
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65	60	57	55
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61	56	53	51
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57	53	49	48
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54	50	46	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	74621
5°	72837
10°	67512
15°	60114
20°	51664
25°	43914
30°	36157
35°	28161
40°	20267
45°	12870
50°	7607
55°	5238
60°	4824
65°	4462
70°	4039
75°	3643
80°	3410
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12870 cd/sqm

TEST NUMBER: P1281208

CATALOG NUMBER: P3AS05R25B2750DE010 E3DLD1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.7	9.8
10°-20°	73.5	23.4
20°-30°	83.1	26.5
30°-40°	65.7	20.9
40°-50°	33.2	10.6
50°-60°	13.3	4.2
60°-70°	8.5	2.7
70°-80°	4.7	1.5
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	187.3	59.6
0°-40°	253.0	80.6
0°-60°	299.5	95.4
0°-90°	314.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	314.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	340	
5°	331	31
15°	265	74
25°	182	83
35°	105	66
45°	42	33
55°	14	13
65°	9	9
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P1281208

CATALOG NUMBER: P3AS05R25B2750DE010 E3DLD1MW_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	340.3
1°	340.3
2°	339.2
3°	337.2
4°	334.5
5°	330.9
6°	326.6
7°	321.5
8°	316.1
9°	309.8
10°	303.2
11°	295.7
12°	288.7
13°	280.5
14°	272.7
15°	264.8
17.5°	242.9
20°	221.4
22.5°	201.1
25°	181.5
27.5°	162.3
30°	142.8
32.5°	124.4
35°	105.2
37.5°	87.6
40°	70.8
42.5°	55.2
45°	41.5
47.5°	30.9
50°	22.3
52.5°	16.8
55°	13.7
57.5°	12.5
60°	11.0
62.5°	9.8
65°	8.6
67.5°	7.4
70°	6.3
72.5°	5.5
75°	4.3
77.5°	3.5
80°	2.7
82.5°	2.0
85°	1.2
87.5°	0.4



TEST NUMBER: P1281208

CATALOG NUMBER: P3AS05R25B2750DE010 E3DLD1MW_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)