

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281404

Luminaire Tested: P3AS05R30B2750DE010 E3DLP1WH\_3500K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1281404  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R30B2750DE010 E3DLP1WH\_3500K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R30 optic, 3500K CCT AND, 80CRI , E3DLP1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 425.0 lumens  
Efficiency: N/A  
Efficacy: 72.0 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1281404

CATALOG NUMBER: P3AS05R30B2750DE010 E3DLP1WH\_3500K

### Luminous Intensity Polar Plot

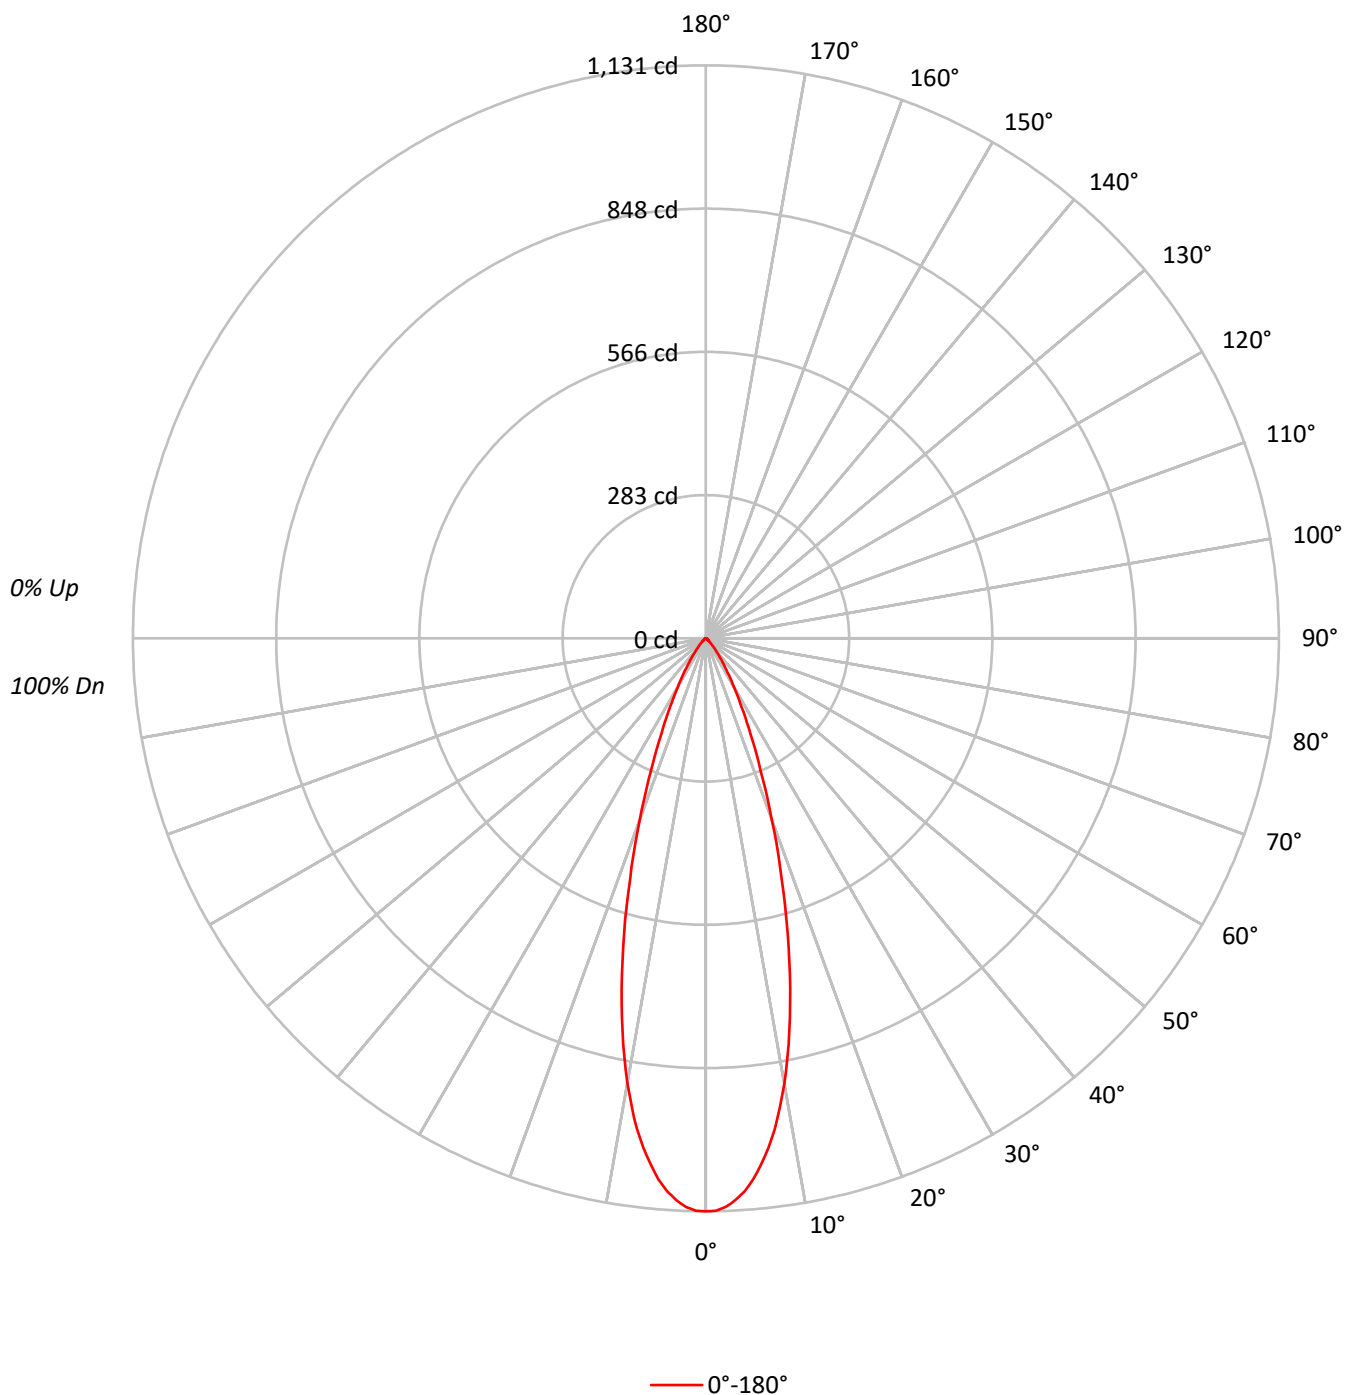

TEST NUMBER: P1281404

CATALOG NUMBER: P3AS05R30B2750DE010 E3DLP1WH\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 |  | 102 | 101 | 100 |  | 99  |
| 2   | 110 | 105 | 102 | 99  | 107 | 104 | 101 | 98  | 101 | 98  | 96  |  | 98  | 96  | 94  |  | 95  |
| 3   | 105 | 100 | 96  | 92  | 103 | 98  | 95  | 91  | 96  | 93  | 90  |  | 94  | 91  | 89  |  | 91  |
| 4   | 101 | 95  | 90  | 87  | 99  | 94  | 89  | 86  | 92  | 88  | 85  |  | 90  | 87  | 84  |  | 88  |
| 5   | 97  | 90  | 85  | 82  | 96  | 89  | 85  | 81  | 88  | 84  | 81  |  | 86  | 83  | 80  |  | 85  |
| 6   | 94  | 86  | 81  | 78  | 92  | 85  | 81  | 77  | 84  | 80  | 77  |  | 83  | 79  | 76  |  | 81  |
| 7   | 90  | 82  | 77  | 74  | 89  | 82  | 77  | 74  | 81  | 76  | 73  |  | 80  | 76  | 73  |  | 79  |
| 8   | 87  | 79  | 74  | 71  | 86  | 79  | 74  | 71  | 78  | 73  | 70  |  | 77  | 73  | 70  |  | 76  |
| 9   | 84  | 76  | 71  | 68  | 83  | 75  | 71  | 68  | 75  | 70  | 67  |  | 74  | 70  | 67  |  | 73  |
| 10  | 81  | 73  | 68  | 65  | 80  | 73  | 68  | 65  | 72  | 68  | 65  |  | 71  | 67  | 65  |  | 71  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 248006 |
| 5°  | 236055 |
| 10° | 198549 |
| 15° | 143179 |
| 20° | 88814  |
| 25° | 50519  |
| 30° | 28055  |
| 35° | 15258  |
| 40° | 8044   |
| 45° | 4373   |
| 50° | 2320   |
| 55° | 1529   |
| 60° | 1403   |
| 65° | 1453   |
| 70° | 1282   |
| 75° | 1017   |
| 80° | 1010   |
| 85° | 1006   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 4373 cd/sqm

TEST NUMBER: P1281404

CATALOG NUMBER: P3AS05R30B2750DE010 E3DLP1WH\_3500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 96.6   | 22.7      |
| 10°-20°   | 171.6  | 40.4      |
| 20°-30°   | 99.2   | 23.3      |
| 30°-40°   | 37.6   | 8.9       |
| 40°-50°   | 11.6   | 2.7       |
| 50°-60°   | 3.9    | 0.9       |
| 60°-70°   | 2.6    | 0.6       |
| 70°-80°   | 1.4    | 0.3       |
| 80°-90°   | 0.4    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 367.4  | 86.5      |
| 0°-40°    | 405.0  | 95.3      |
| 0°-60°    | 420.5  | 98.9      |
| 0°-90°    | 425.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 425.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1131 |      |
| 5°  | 1072 | 97   |
| 15° | 631  | 172  |
| 25° | 209  | 99   |
| 35° | 57   | 38   |
| 45° | 14   | 12   |
| 55° | 4    | 4    |
| 65° | 3    | 3    |
| 75° | 1    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1281404

CATALOG NUMBER: P3AS05R30B2750DE010 E3DLP1WH\_3500K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1131.0 |
| 1°    | 1130.2 |
| 2°    | 1123.3 |
| 3°    | 1110.5 |
| 4°    | 1094.4 |
| 5°    | 1072.4 |
| 6°    | 1044.3 |
| 7°    | 1012.9 |
| 8°    | 978.0  |
| 9°    | 936.3  |
| 10°   | 891.7  |
| 11°   | 843.5  |
| 12°   | 792.5  |
| 13°   | 739.1  |
| 14°   | 684.9  |
| 15°   | 630.7  |
| 17.5° | 497.4  |
| 20°   | 380.6  |
| 22.5° | 282.2  |
| 25°   | 208.8  |
| 27.5° | 151.8  |
| 30°   | 110.8  |
| 32.5° | 79.9   |
| 35°   | 57.0   |
| 37.5° | 39.7   |
| 40°   | 28.1   |
| 42.5° | 19.7   |
| 45°   | 14.1   |
| 47.5° | 9.6    |
| 50°   | 6.8    |
| 52.5° | 4.8    |
| 55°   | 4.0    |
| 57.5° | 3.6    |
| 60°   | 3.2    |
| 62.5° | 2.8    |
| 65°   | 2.8    |
| 67.5° | 2.4    |
| 70°   | 2.0    |
| 72.5° | 1.6    |
| 75°   | 1.2    |
| 77.5° | 1.2    |
| 80°   | 0.8    |
| 82.5° | 0.8    |
| 85°   | 0.4    |
| 87.5° | 0.0    |



TEST NUMBER: P1281404

CATALOG NUMBER: P3AS05R30B2750DE010 E3DLP1WH\_3500K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)