

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281508

Luminaire Tested: P3AS05R35B2750DE010 E3DLD1MW_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281508
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R35B2750DE010 E3DLD1MW_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 317.0 lumens
Efficiency: N/A
Efficacy: 53.7 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281508

CATALOG NUMBER: P3AS05R35B2750DE010 E3DLD1MW_3000K

Luminous Intensity Polar Plot

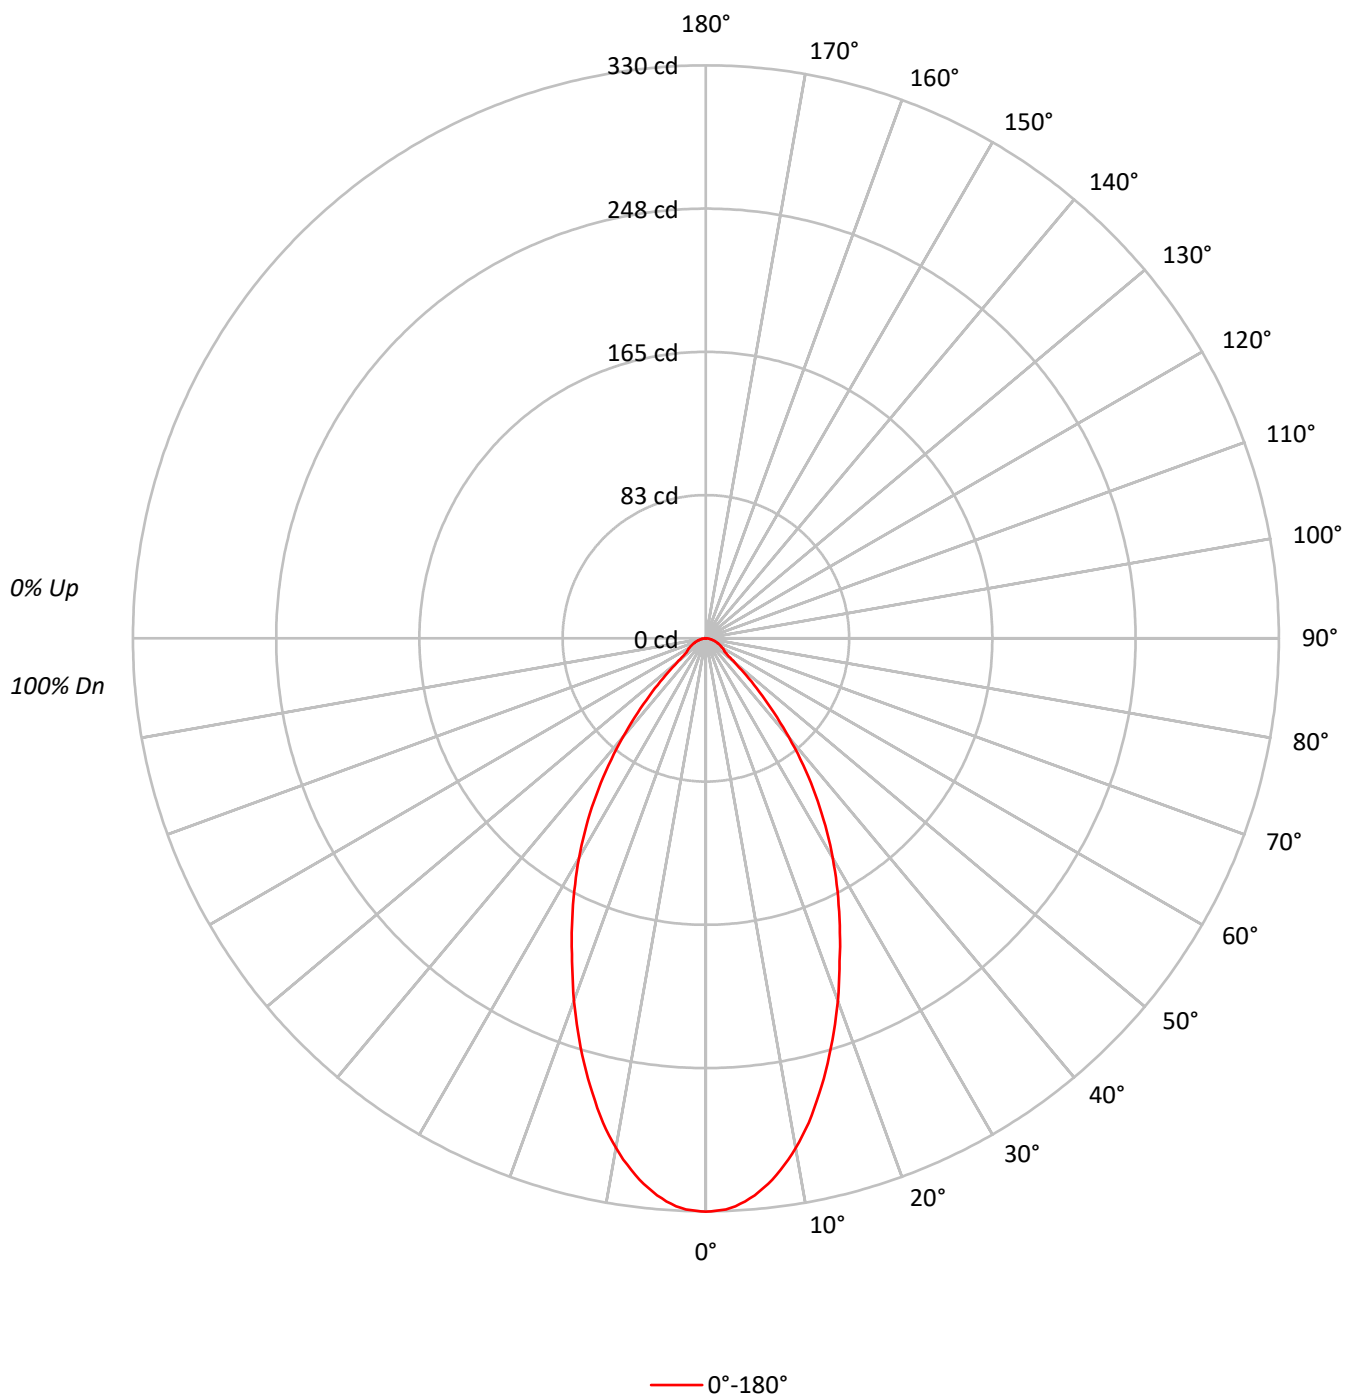

TEST NUMBER: P1281508

CATALOG NUMBER: P3AS05R35B2750DE010 E3DLD1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91		
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83		
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76		
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69		
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64		
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59		
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55		
8	75	64	58	53	74	64	57	53	63	57	53	62	56	53	61	56	52	51		
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48		
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	72406
5°	70878
10°	66376
15°	59592
20°	51828
25°	44156
30°	36993
35°	29473
40°	21297
45°	13490
50°	7335
55°	5085
60°	4824
65°	4462
70°	4296
75°	3643
80°	3410
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 13490 cd/sqm

TEST NUMBER: P1281508

CATALOG NUMBER: P3AS05R35B2750DE010 E3DLD1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.0	9.5
10°-20°	73.0	23.0
20°-30°	83.7	26.4
30°-40°	68.3	21.5
40°-50°	34.4	10.9
50°-60°	12.8	4.0
60°-70°	8.6	2.7
70°-80°	4.7	1.5
80°-90°	1.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	186.7	58.9
0°-40°	255.0	80.4
0°-60°	302.2	95.3
0°-90°	317.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	317.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	330	
5°	322	30
15°	262	73
25°	182	84
35°	110	68
45°	44	34
55°	13	13
65°	9	9
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P1281508

CATALOG NUMBER: P3AS05R35B2750DE010 E3DLD1MW_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	330.2
1°	329.8
2°	329.1
3°	327.5
4°	325.1
5°	322.0
6°	318.1
7°	314.2
8°	309.1
9°	304.0
10°	298.1
11°	291.8
12°	285.2
13°	277.7
14°	269.9
15°	262.5
17.5°	242.5
20°	222.1
22.5°	201.3
25°	182.5
27.5°	164.1
30°	146.1
32.5°	128.1
35°	110.1
37.5°	92.1
40°	74.4
42.5°	58.0
45°	43.5
47.5°	31.3
50°	21.5
52.5°	15.7
55°	13.3
57.5°	12.1
60°	11.0
62.5°	9.8
65°	8.6
67.5°	7.4
70°	6.7
72.5°	5.5
75°	4.3
77.5°	3.5
80°	2.7
82.5°	2.0
85°	1.2
87.5°	0.8



TEST NUMBER: P1281508

CATALOG NUMBER: P3AS05R35B2750DE010 E3DLD1MW_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)