

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281618

Luminaire Tested: P3AS05R40B2750DE010 E3D1WMH_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281618
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R40B2750DE010 E3D1WMH_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R40 optic, 3000K CCT AND, 90CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 548.0 lumens
Efficiency: N/A
Efficacy: 92.9 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281618

CATALOG NUMBER: P3AS05R40B2750DE010 E3D1WMH_3000K

Luminous Intensity Polar Plot

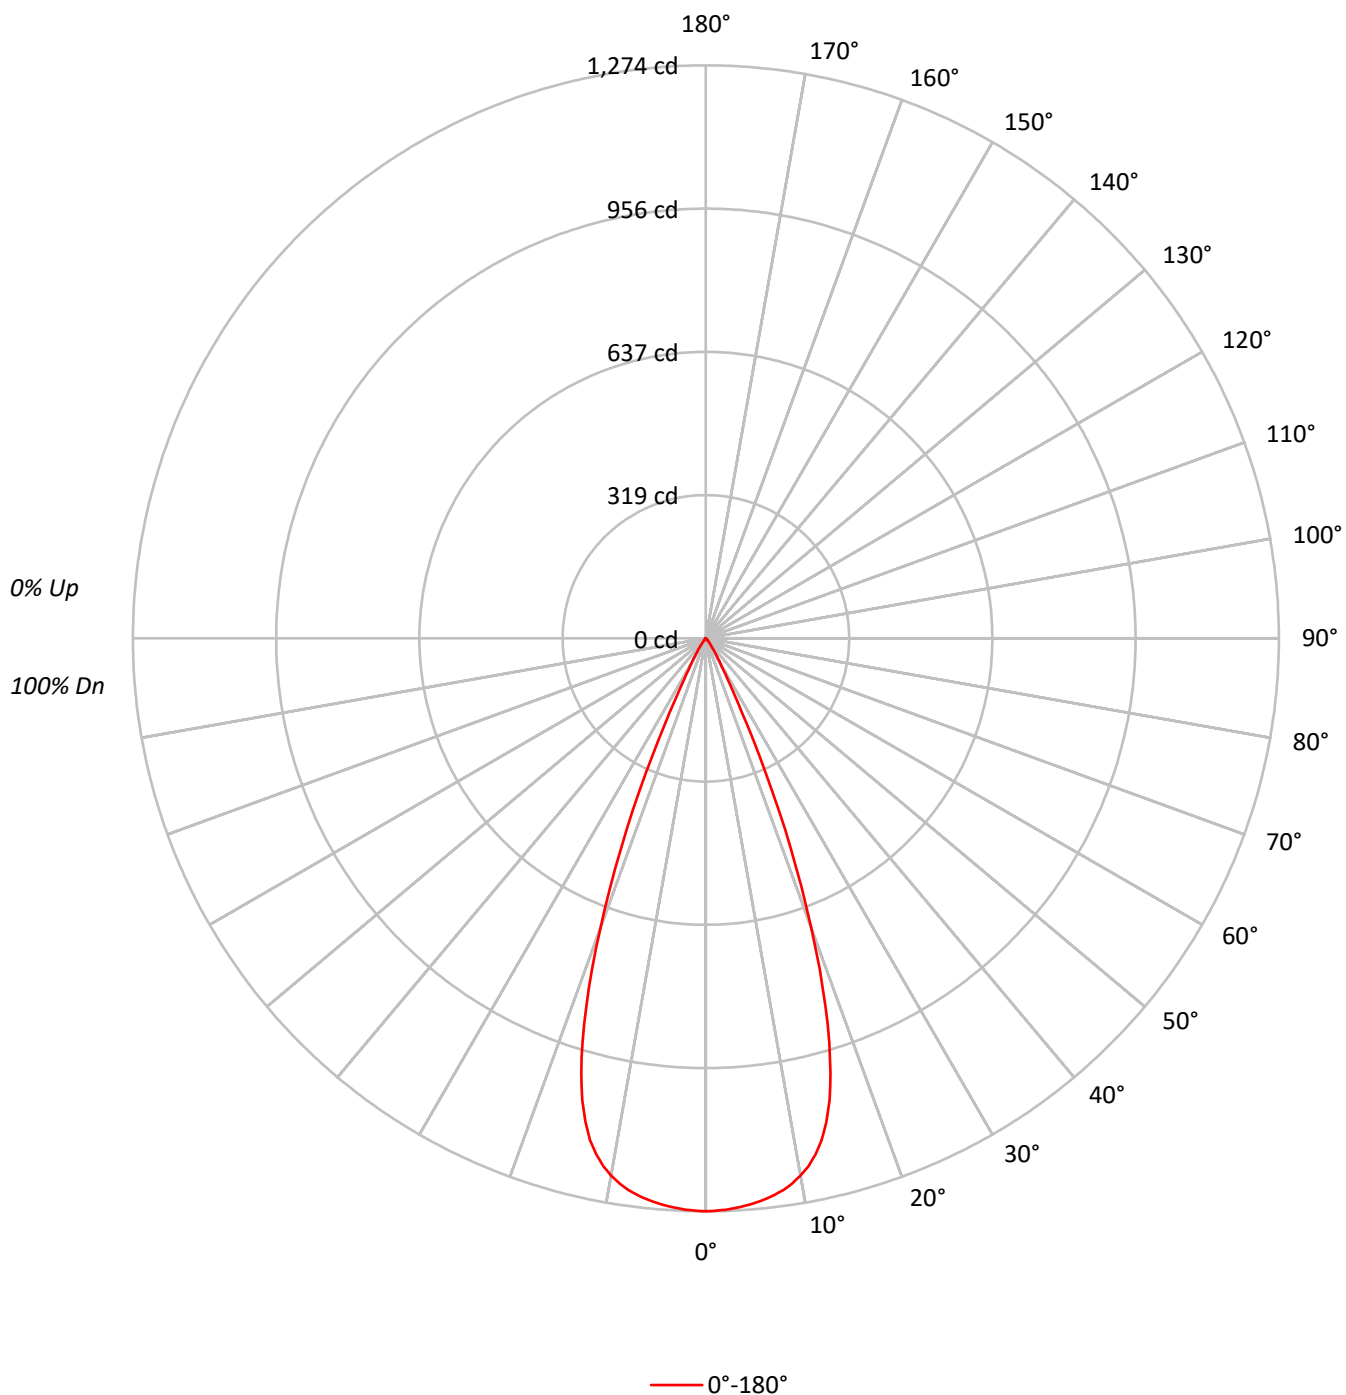

TEST NUMBER: P1281618

CATALOG NUMBER: P3AS05R40B2750DE010 E3D1WMH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100											
1	115	112	110	109	112	110	109	107	106	105	104	103	102	101	99	98	98	96											
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	96	95	94	92											
3	107	102	98	95	105	100	97	94	98	95	93	96	93	91	93	91	90	88											
4	103	97	93	90	101	96	92	89	94	91	88	92	89	87	90	88	86	85											
5	99	93	89	85	98	92	88	85	91	87	84	89	86	84	88	85	83	82											
6	96	89	85	81	95	89	84	81	87	83	81	86	83	80	85	82	80	79											
7	93	86	81	78	92	85	81	78	84	80	77	83	80	77	82	79	77	76											
8	90	83	78	75	89	82	78	75	81	77	75	80	77	74	79	76	74	73											
9	87	80	75	72	86	79	75	72	78	75	72	78	74	72	77	74	71	70											
10	84	77	72	70	83	77	72	69	76	72	69	75	72	69	74	71	69	68											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	279320
5°	277305
10°	270046
15°	241227
20°	159964
25°	59931
30°	16028
35°	6264
40°	2261
45°	1085
50°	341
55°	153
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1085 cd/sqm

TEST NUMBER: P1281618

CATALOG NUMBER: P3AS05R40B2750DE010 E3D1WMH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.9	21.7
10°-20°	281.6	51.4
20°-30°	127.7	23.3
30°-40°	16.6	3.0
40°-50°	2.9	0.5
50°-60°	0.4	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	528.1	96.4
0°-40°	544.7	99.4
0°-60°	547.9	100.0
0°-90°	548.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	548.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1274	
5°	1260	119
15°	1063	282
25°	248	128
35°	23	17
45°	4	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1281618

CATALOG NUMBER: P3AS05R40B2750DE010 E3D1WMH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1273.8
1°	1273.1
2°	1271.2
3°	1268.3
4°	1264.6
5°	1259.8
6°	1254.3
7°	1247.4
8°	1238.9
9°	1227.4
10°	1212.8
11°	1195.8
12°	1172.9
13°	1144.7
14°	1107.9
15°	1062.6
16°	1004.9
17°	939.1
18°	860.0
19°	776.6
20°	685.5
21°	594.3
22°	504.5
23°	415.1
24°	327.3
25°	247.7
26°	183.4
27°	134.3
28°	100.9
29°	78.5
30°	63.3
31°	52.4
32°	43.7
32.5°	39.9
33°	36.1
34°	29.4
35°	23.4
36°	18.4
37°	14.6
37.5°	13.0
38°	11.5
39°	9.6
40°	7.9
42.5°	5.2
45°	3.5



TEST NUMBER: P1281618

CATALOG NUMBER: P3AS05R40B2750DE010 E3D1WMH_3000K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	2.1
50°	1.0
52.5°	0.4
55°	0.4
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)