

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281661

Luminaire Tested: P3AS05R40B2750DE010 E3DLD1H_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281661
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R40B2750DE010 E3DLD1H_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R40 optic, 5000K CCT AND, 80CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 380.1 lumens
Efficiency: N/A
Efficacy: 64.4 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281661

CATALOG NUMBER: P3AS05R40B2750DE010 E3DLD1H_5000K

Luminous Intensity Polar Plot

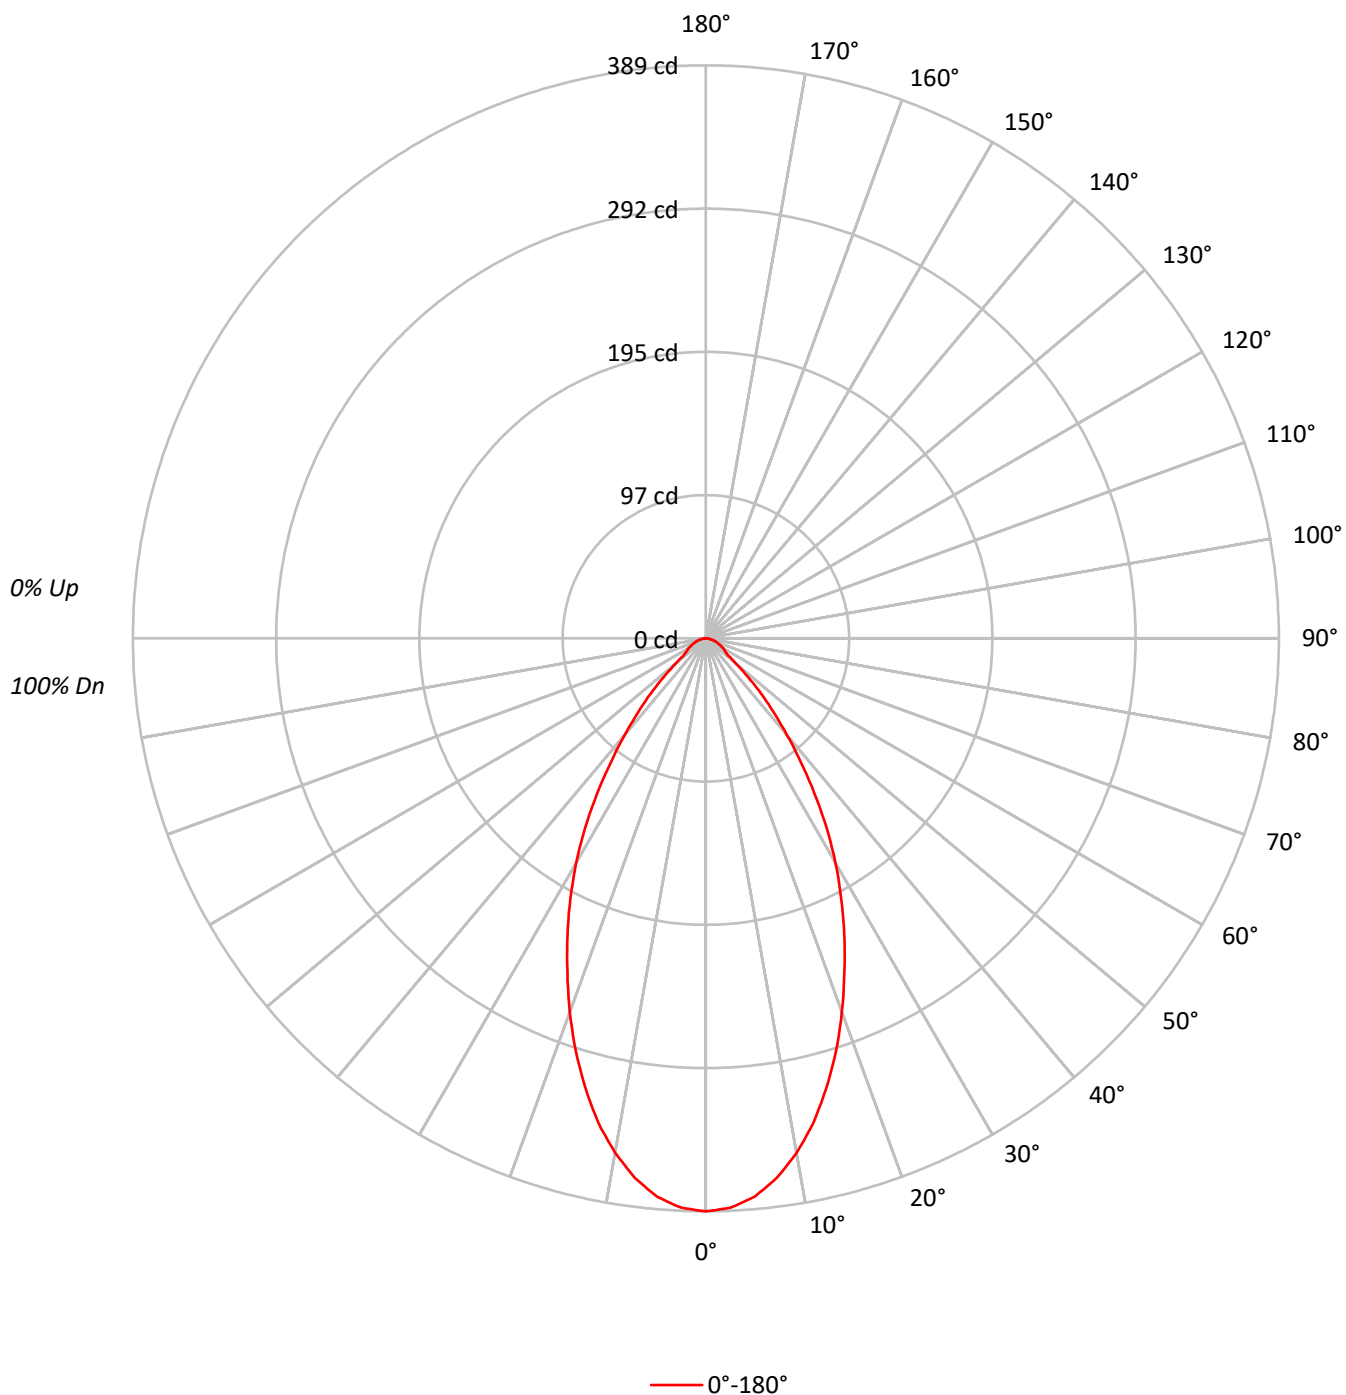

TEST NUMBER: P1281661

CATALOG NUMBER: P3AS05R40B2750DE010 E3DLD1H_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96	94	93		91
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89	87	85		83
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83	80	78		76
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78	74	71		69
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73	69	66		64
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68	64	61		59
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64	60	56		55
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61	56	52		51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49		48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46		45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	85300
5°	83755
10°	78956
15°	71714
20°	63005
25°	53810
30°	44564
35°	34372
40°	24474
45°	16467
50°	9006
55°	6346
60°	5964
65°	5500
70°	4937
75°	4660
80°	3788
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16467 cd/sqm

TEST NUMBER: P1281661

CATALOG NUMBER: P3AS05R40B2750DE010 E3DLD1H_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.5	9.3
10°-20°	88.0	23.2
20°-30°	101.7	26.8
30°-40°	80.2	21.1
40°-50°	41.1	10.8
50°-60°	15.7	4.1
60°-70°	10.4	2.7
70°-80°	5.7	1.5
80°-90°	1.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	225.2	59.3
0°-40°	305.4	80.4
0°-60°	362.3	95.3
0°-90°	380.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	380.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	389	
5°	380	35
15°	316	88
25°	222	102
35°	128	80
45°	53	41
55°	17	16
65°	11	10
75°	6	6
85°	1	2
90°	0	

TEST NUMBER: P1281661

CATALOG NUMBER: P3AS05R40B2750DE010 E3DLD1H_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	389.0
2.5°	386.9
5°	380.5
7.5°	369.5
10°	354.6
12.5°	337.1
15°	315.9
17.5°	293.8
20°	270.0
22.5°	245.7
25°	222.4
27.5°	199.0
30°	176.0
32.5°	152.6
35°	128.4
37.5°	105.9
40°	85.5
42.5°	68.0
45°	53.1
47.5°	38.7
50°	26.4
52.5°	19.1
55°	16.6
57.5°	14.9
60°	13.6
62.5°	11.9
65°	10.6
67.5°	8.9
70°	7.7
72.5°	6.4
75°	5.5
77.5°	4.3
80°	3.0
82.5°	2.6
85°	1.3
87.5°	0.9
90°	0.0

(END OF REPORT)