

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281750

Luminaire Tested: P3AS05R45B2750DE010 E3DL1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281750
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-27)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R45B2750DE010 E3DL1GPH_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R45 optic, 4000K CCT AND, 80CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 218.0 lumens
Efficiency: N/A
Efficacy: 37.0 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.69
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281750

CATALOG NUMBER: P3AS05R45B2750DE010 E3DL1GPH_4000K

Luminous Intensity Polar Plot

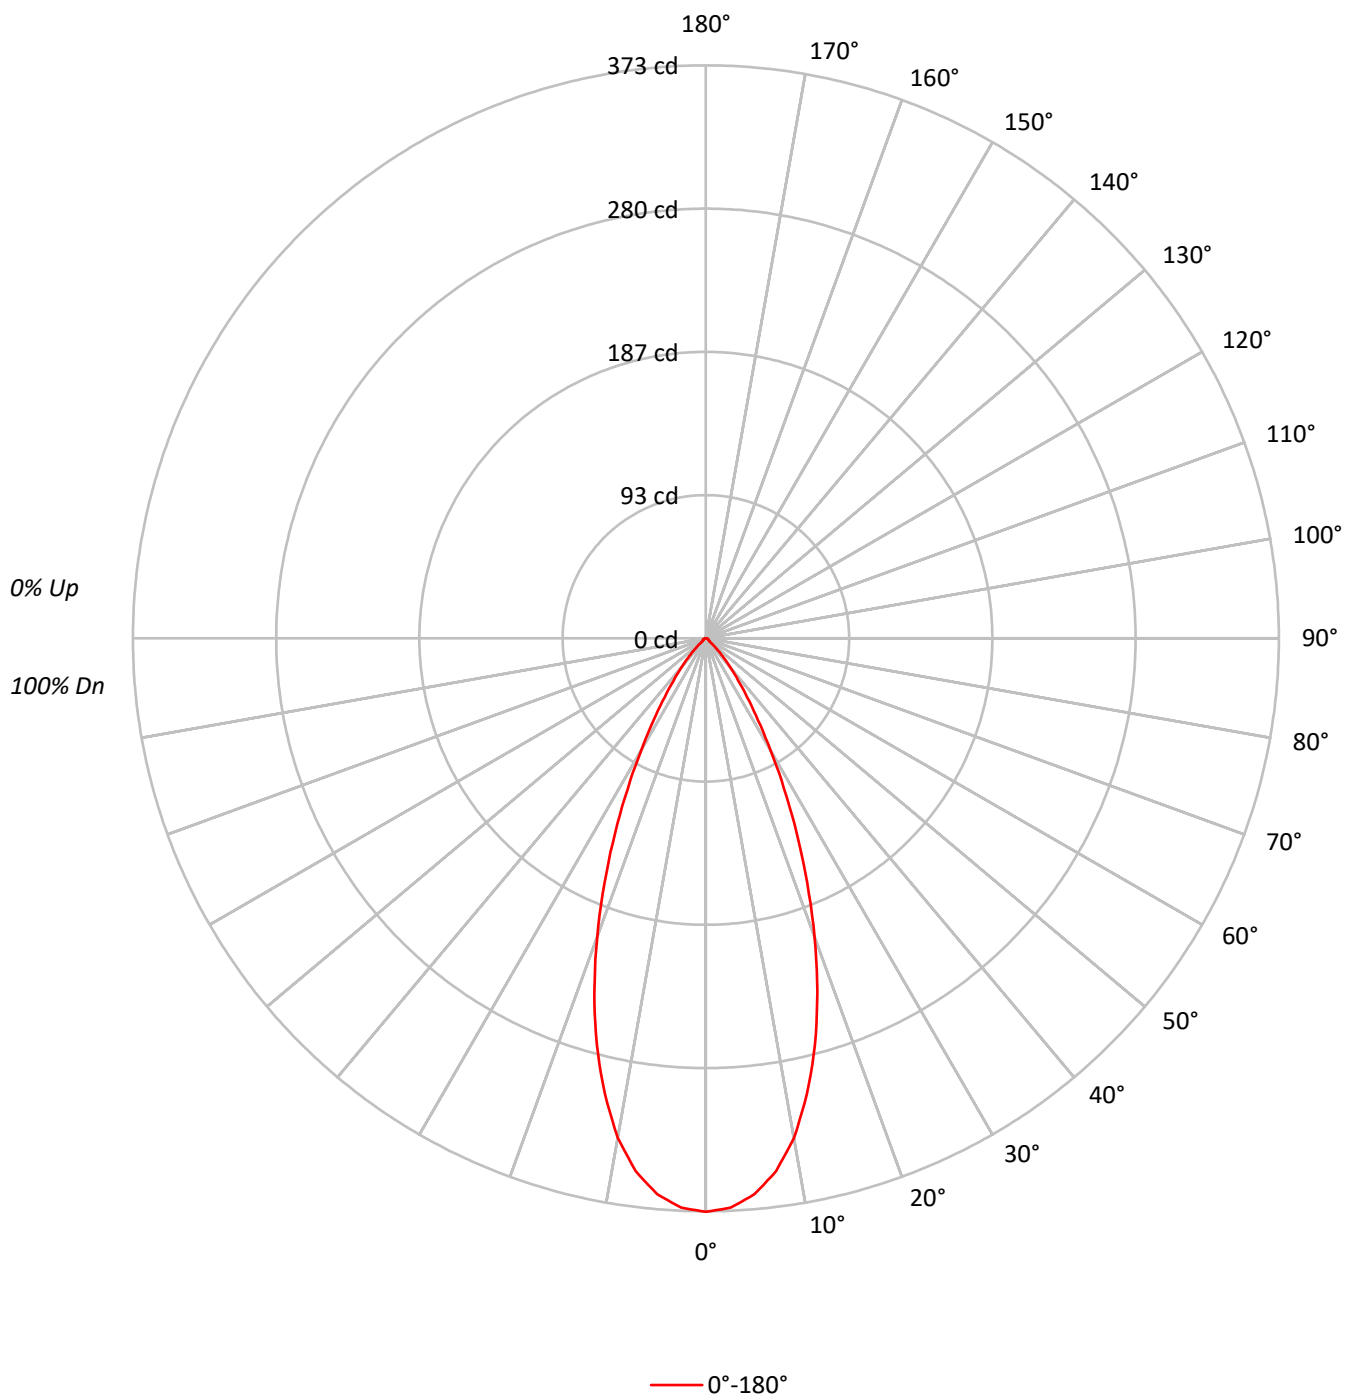

TEST NUMBER: P1281750

CATALOG NUMBER: P3AS05R45B2750DE010 E3DL1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100											
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94											
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88											
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	86	84	83											
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78											
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74											
6	90	82	76	73	89	81	76	72	80	75	72	78	74	71	77	74	71	69											
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66											
8	83	74	68	65	82	73	68	64	72	68	64	71	67	64	70	67	64	62											
9	79	70	65	61	78	70	65	61	69	64	61	68	64	61	67	63	61	59											
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	81857
5°	79947
10°	73501
15°	62271
20°	48304
25°	33776
30°	21269
35°	12528
40°	7099
45°	3442
50°	1194
55°	956
60°	921
65°	934
70°	898
75°	847
80°	758
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3442 cd/sqm

TEST NUMBER: P1281750

CATALOG NUMBER: P3AS05R45B2750DE010 E3DL1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.6	15.4
10°-20°	75.3	34.5
20°-30°	64.0	29.3
30°-40°	30.5	14.0
40°-50°	9.2	4.2
50°-60°	2.3	1.1
60°-70°	1.7	0.8
70°-80°	1.1	0.5
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	172.9	79.3
0°-40°	203.4	93.3
0°-60°	214.9	98.6
0°-90°	218.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	218.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	373	
5°	363	34
15°	274	75
25°	140	64
35°	47	31
45°	11	9
55°	2	2
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1281750

CATALOG NUMBER: P3AS05R45B2750DE010 E3DL1GPH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	373.3
2.5°	371.0
5°	363.2
7.5°	349.8
10°	330.1
12.5°	303.9
15°	274.3
17.5°	241.4
20°	207.0
22.5°	172.1
25°	139.6
27.5°	110.0
30°	84.0
32.5°	63.2
35°	46.8
37.5°	34.5
40°	24.8
42.5°	17.2
45°	11.1
47.5°	6.2
50°	3.5
52.5°	2.7
55°	2.5
57.5°	2.3
60°	2.1
62.5°	1.9
65°	1.8
67.5°	1.6
70°	1.4
72.5°	1.2
75°	1.0
77.5°	0.8
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)