

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281751

Luminaire Tested: P3AS05R45B2750DE010 E3DL1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281751
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-27)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R45B2750DE010 E3DL1GPH_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R45 optic, 5000K CCT AND, 80CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 233.0 lumens
Efficiency: N/A
Efficacy: 39.5 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.69
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281751

CATALOG NUMBER: P3AS05R45B2750DE010 E3DL1GPH_5000K

Luminous Intensity Polar Plot

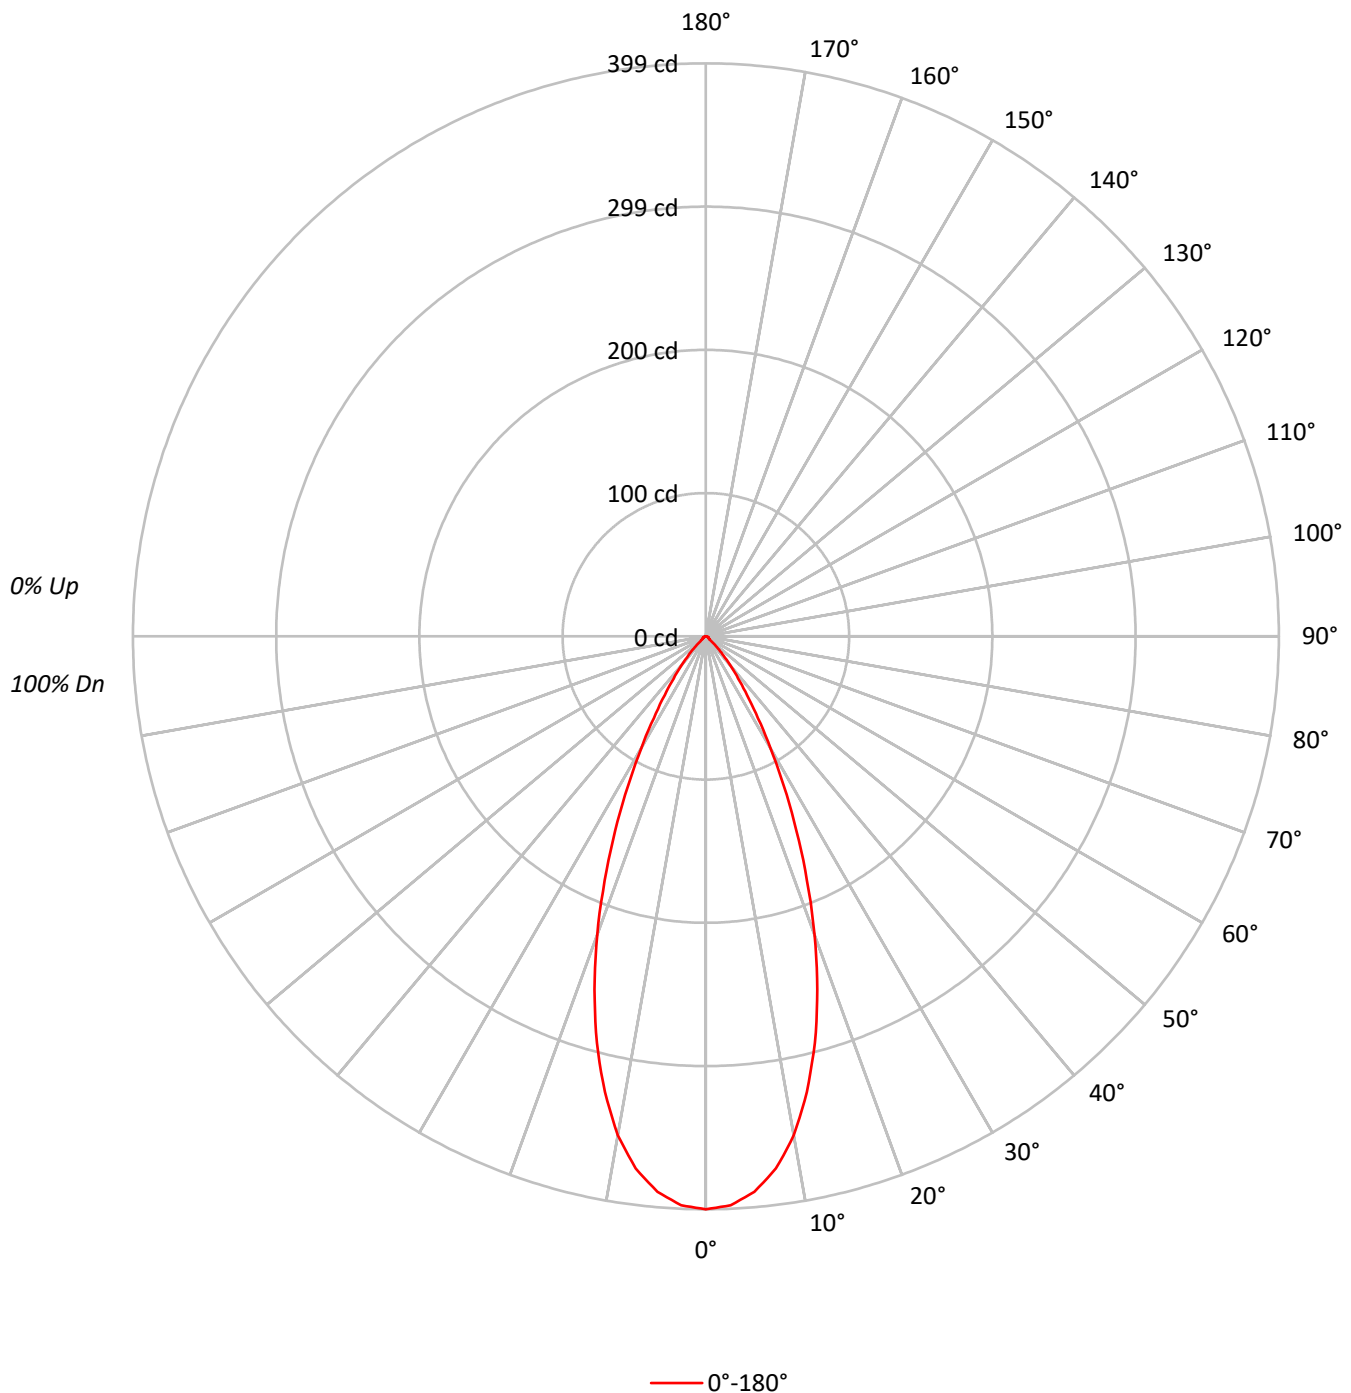

TEST NUMBER: P1281751

CATALOG NUMBER: P3AS05R45B2750DE010 E3DL1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98	97	96	94
2	109	104	100	97	106	102	99	96	99	96	94		96	94	92		93	91	90	88
3	104	98	93	89	102	96	92	88	94	90	87		91	88	86		89	86	84	83
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85	82	79	78
5	94	87	81	77	93	86	81	77	84	80	76		82	79	76		81	78	75	74
6	90	82	76	73	89	81	76	72	80	75	72		78	74	71		77	74	71	70
7	86	78	72	68	85	77	72	68	76	71	68		75	71	67		74	70	67	66
8	83	74	68	65	82	73	68	64	72	68	64		71	67	64		70	67	64	62
9	79	70	65	61	78	70	65	61	69	64	61		68	64	61		67	63	61	59
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	87493
5°	85450
10°	78556
15°	66561
20°	51641
25°	36099
30°	22738
35°	13385
40°	7586
45°	3690
50°	1296
55°	1032
60°	1009
65°	986
70°	962
75°	847
80°	758
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3690 cd/sqm

TEST NUMBER: P1281751

CATALOG NUMBER: P3AS05R45B2750DE010 E3DL1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.9	15.4
10°-20°	80.5	34.6
20°-30°	68.4	29.3
30°-40°	32.6	14.0
40°-50°	9.8	4.2
50°-60°	2.5	1.1
60°-70°	1.9	0.8
70°-80°	1.1	0.5
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	184.8	79.3
0°-40°	217.4	93.3
0°-60°	229.8	98.6
0°-90°	233.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	233.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	399	
5°	388	36
15°	293	81
25°	149	68
35°	50	33
45°	12	10
55°	3	2
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1281751

CATALOG NUMBER: P3AS05R45B2750DE010 E3DL1GPH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	399.0
2.5°	396.5
5°	388.2
7.5°	373.8
10°	352.8
12.5°	324.9
15°	293.2
17.5°	258.0
20°	221.3
22.5°	184.0
25°	149.2
27.5°	117.5
30°	89.8
32.5°	67.5
35°	50.0
37.5°	36.9
40°	26.5
42.5°	18.3
45°	11.9
47.5°	6.7
50°	3.8
52.5°	2.9
55°	2.7
57.5°	2.5
60°	2.3
62.5°	2.1
65°	1.9
67.5°	1.7
70°	1.5
72.5°	1.3
75°	1.0
77.5°	0.8
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)