

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281896

Luminaire Tested: P3AS05R50B2750DE010 E3DL1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281896
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R50B2750DE010 E3DL1GPH_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R50 optic, 5000K CCT AND, 80CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 234.0 lumens
Efficiency: N/A
Efficacy: 39.7 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281896
CATALOG NUMBER: P3AS05R50B2750DE010 E3DL1GPH_5000K

Luminous Intensity Polar Plot

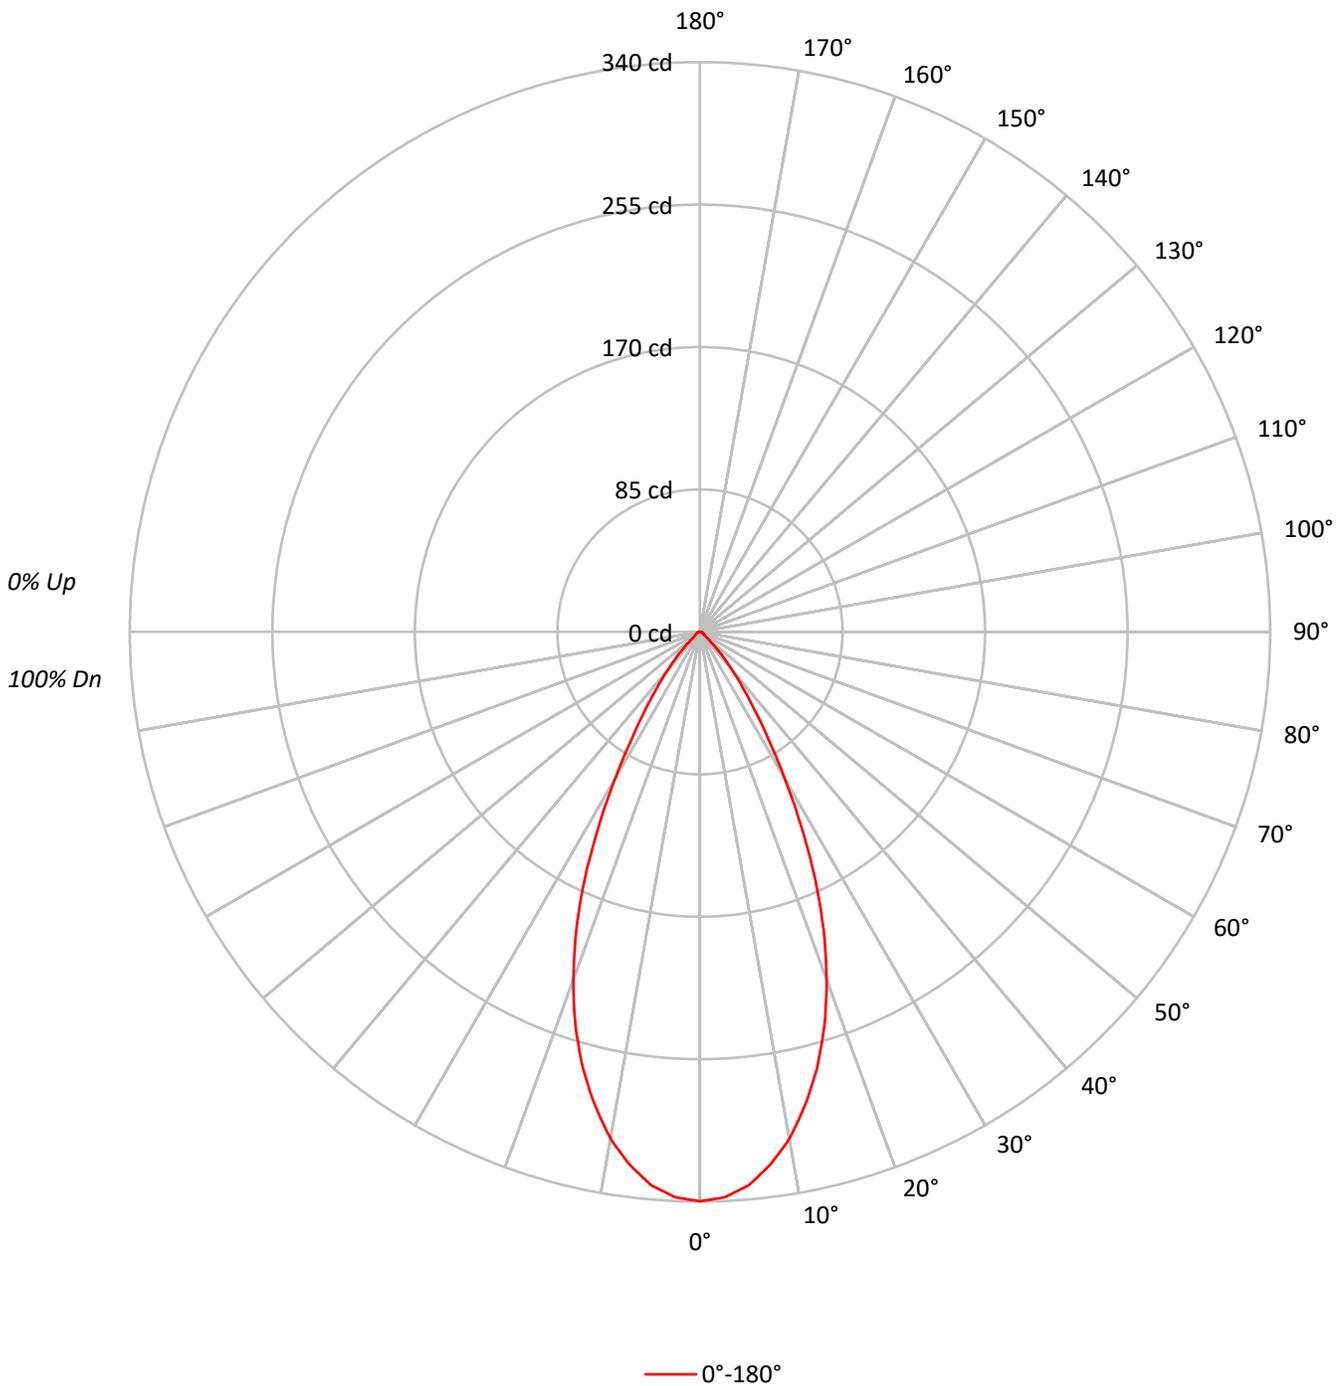



TEST NUMBER: P1281896
 CATALOG NUMBER: P3AS05R50B2750DE010 E3DL1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82			
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	76			
5	93	85	80	76	92	84	79	75	83	78	74	81	77	74	79	76	73	72			
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	75	72	69	68			
7	85	76	70	66	84	75	70	66	74	69	66	73	69	65	72	68	65	64			
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60			
9	78	68	63	59	76	68	62	59	67	62	59	66	62	58	65	61	58	57			
10	74	65	59	56	73	65	59	56	64	59	55	63	59	55	62	58	55	54			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	74512
5°	72991
10°	68380
15°	61204
20°	51501
25°	39317
30°	25548
35°	15151
40°	8759
45°	4373
50°	1637
55°	1262
60°	1184
65°	1090
70°	1090
75°	1017
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4373 cd/sqm



TEST NUMBER: P1281896

CATALOG NUMBER: P3AS05R50B2750DE010 E3DL1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.9	13.2
10°-20°	74.6	31.9
20°-30°	73.2	31.3
30°-40°	36.8	15.8
40°-50°	11.6	5.0
50°-60°	3.0	1.3
60°-70°	2.2	0.9
70°-80°	1.3	0.6
80°-90°	0.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	178.6	76.3
0°-40°	215.4	92.1
0°-60°	230.1	98.3
0°-90°	234.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	234.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	340	
5°	332	31
15°	270	75
25°	162	73
35°	57	37
45°	14	12
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1281896
CATALOG NUMBER: P3AS05R50B2750DE010 E3DL1GPH_5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	339.8
2.5°	337.7
5°	331.6
7.5°	320.8
10°	307.1
12.5°	289.4
15°	269.6
17.5°	246.8
20°	220.7
22.5°	192.7
25°	162.5
27.5°	130.5
30°	100.9
32.5°	75.9
35°	56.6
37.5°	41.8
40°	30.6
42.5°	21.6
45°	14.1
47.5°	8.1
50°	4.8
52.5°	3.5
55°	3.3
57.5°	2.9
60°	2.7
62.5°	2.5
65°	2.1
67.5°	1.9
70°	1.7
72.5°	1.5
75°	1.2
77.5°	1.0
80°	0.8
82.5°	0.6
85°	0.4
87.5°	0.2
90°	0.0

(END OF REPORT)