

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1281929

Luminaire Tested: P3AS05R50B2750DE010 E3DLD1H_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1281929
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R50B2750DE010 E3DLD1H_3500K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R50 optic, 3500K CCT AND, 80CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 352.0 lumens
Efficiency: N/A
Efficacy: 59.7 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1281929

CATALOG NUMBER: P3AS05R50B2750DE010 E3DLD1H_3500K

Luminous Intensity Polar Plot

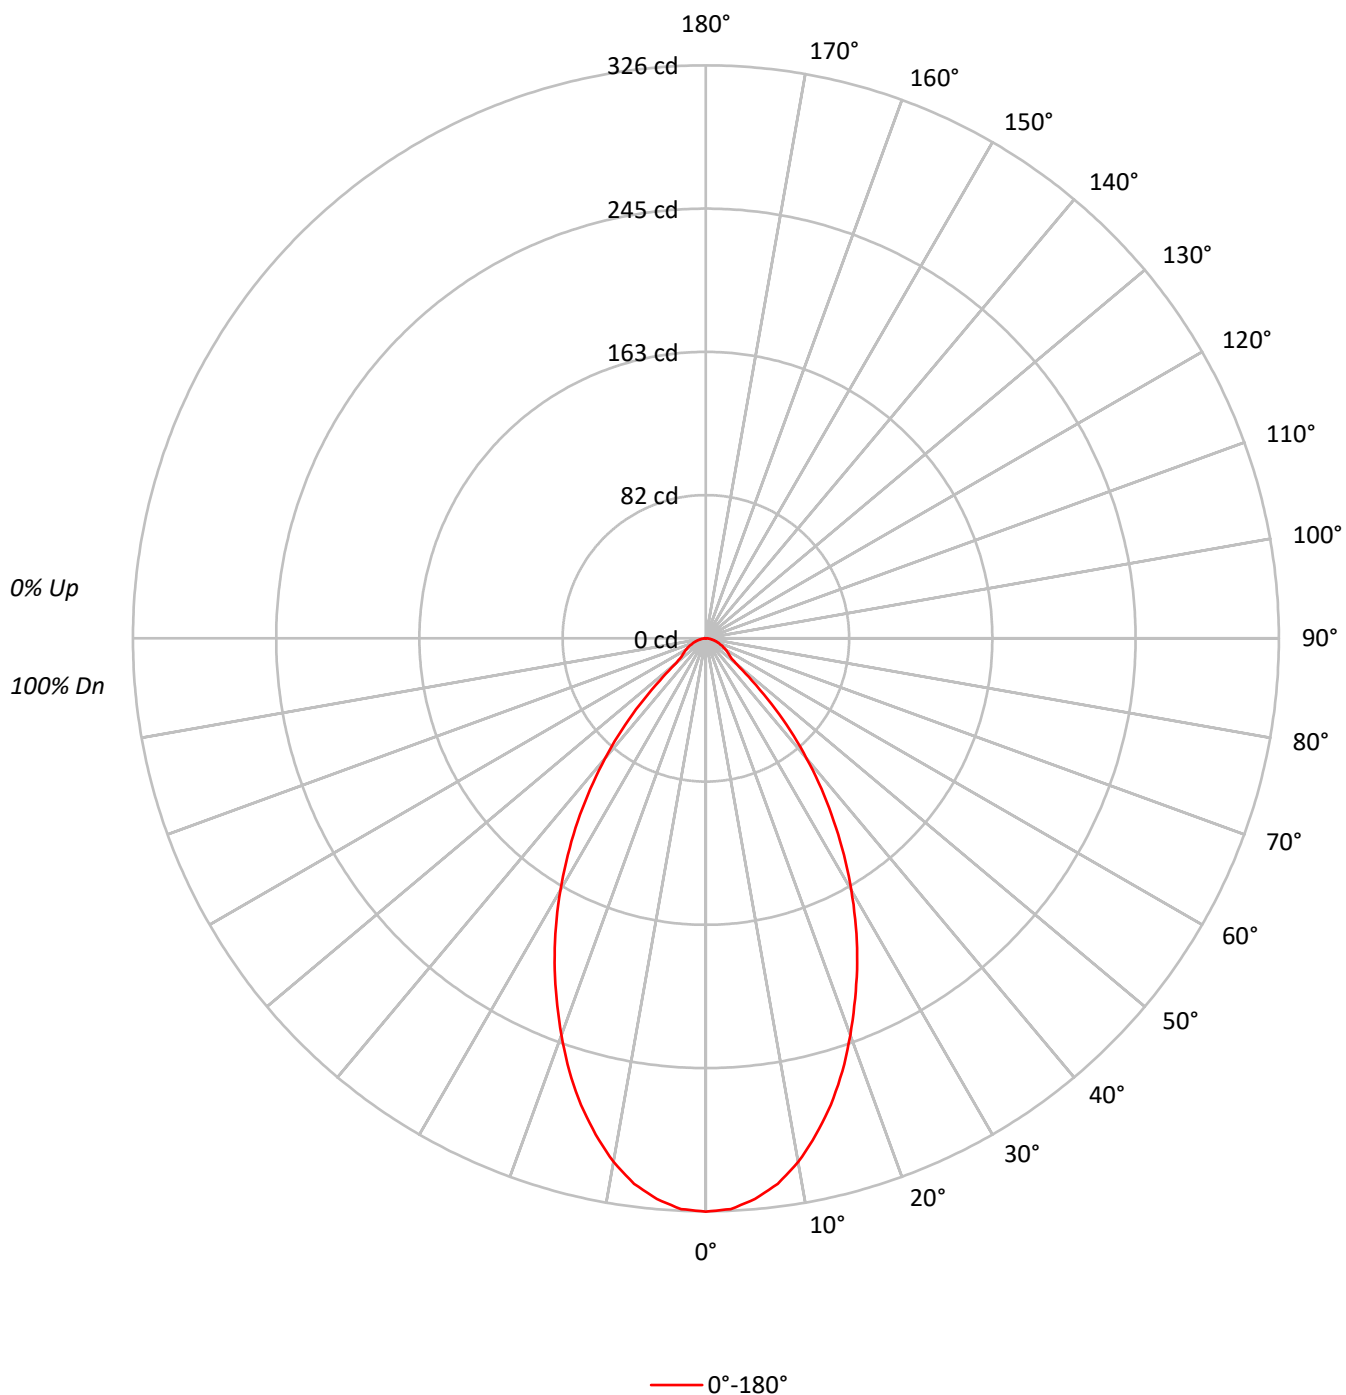



TEST NUMBER: P1281929

CATALOG NUMBER: P3AS05R50B2750DE010 E3DLD1H_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20		
RC	80					70					50					30					0		
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		0				
RCR																							
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100
1	112	109	106	103		110	107	104	102		103	101	99		99	97	96		96	94	93		91
2	106	100	95	91		103	98	94	90		95	91	88		92	89	86		89	86	84		83
3	99	92	86	81		97	90	85	81		88	83	79		85	81	78		83	80	77		75
4	93	85	78	73		91	83	77	73		81	76	72		79	75	71		77	73	70		69
5	88	78	72	67		86	77	71	66		75	70	66		74	69	65		72	68	64		63
6	83	73	66	61		81	72	65	61		70	65	60		69	64	60		67	63	59		58
7	78	68	61	56		77	67	61	56		66	60	56		64	59	55		63	59	55		53
8	74	63	57	52		73	63	56	52		61	56	52		60	55	51		59	55	51		50
9	70	59	53	48		69	59	52	48		58	52	48		57	52	48		56	51	48		46
10	66	56	49	45		65	55	49	45		54	49	45		54	48	45		53	48	45		43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	71529
5°	70482
10°	67356
15°	62384
20°	56052
25°	49285
30°	41905
35°	33997
40°	25534
45°	16436
50°	7812
55°	6155
60°	5833
65°	5396
70°	4873
75°	4406
80°	4041
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16436 cd/sqm

TEST NUMBER: P1281929

CATALOG NUMBER: P3AS05R50B2750DE010 E3DLD1H_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.0	8.5
10°-20°	76.6	21.8
20°-30°	93.1	26.4
30°-40°	78.9	22.4
40°-50°	41.0	11.7
50°-60°	14.8	4.2
60°-70°	10.2	2.9
70°-80°	5.5	1.6
80°-90°	1.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	199.7	56.7
0°-40°	278.7	79.2
0°-60°	334.5	95.0
0°-90°	352.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	352.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	326	
5°	320	30
15°	275	77
25°	204	93
35°	127	79
45°	53	41
55°	16	15
65°	10	10
75°	5	6
85°	2	2
90°	0	

TEST NUMBER: P1281929

CATALOG NUMBER: P3AS05R50B2750DE010 E3DLD1H_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	326.2
2.5°	325.0
5°	320.2
7.5°	313.0
10°	302.5
12.5°	289.3
15°	274.8
17.5°	258.3
20°	240.2
22.5°	221.8
25°	203.7
27.5°	184.8
30°	165.5
32.5°	146.2
35°	127.0
37.5°	108.1
40°	89.2
42.5°	71.1
45°	53.0
47.5°	35.4
50°	22.9
52.5°	17.7
55°	16.1
57.5°	14.5
60°	13.3
62.5°	11.7
65°	10.4
67.5°	8.8
70°	7.6
72.5°	6.4
75°	5.2
77.5°	4.0
80°	3.2
82.5°	2.4
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)