

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1282086

Luminaire Tested: P3AS05R55B2750DE010 E3DLD1MW_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1282086
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R55B2750DE010 E3DLD1MW_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R55 optic, 5000K CCT AND, 80CRI , E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 360.0 lumens
Efficiency: N/A
Efficacy: 61.0 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1282086

CATALOG NUMBER: P3AS05R55B2750DE010 E3DLD1MW_5000K

Luminous Intensity Polar Plot

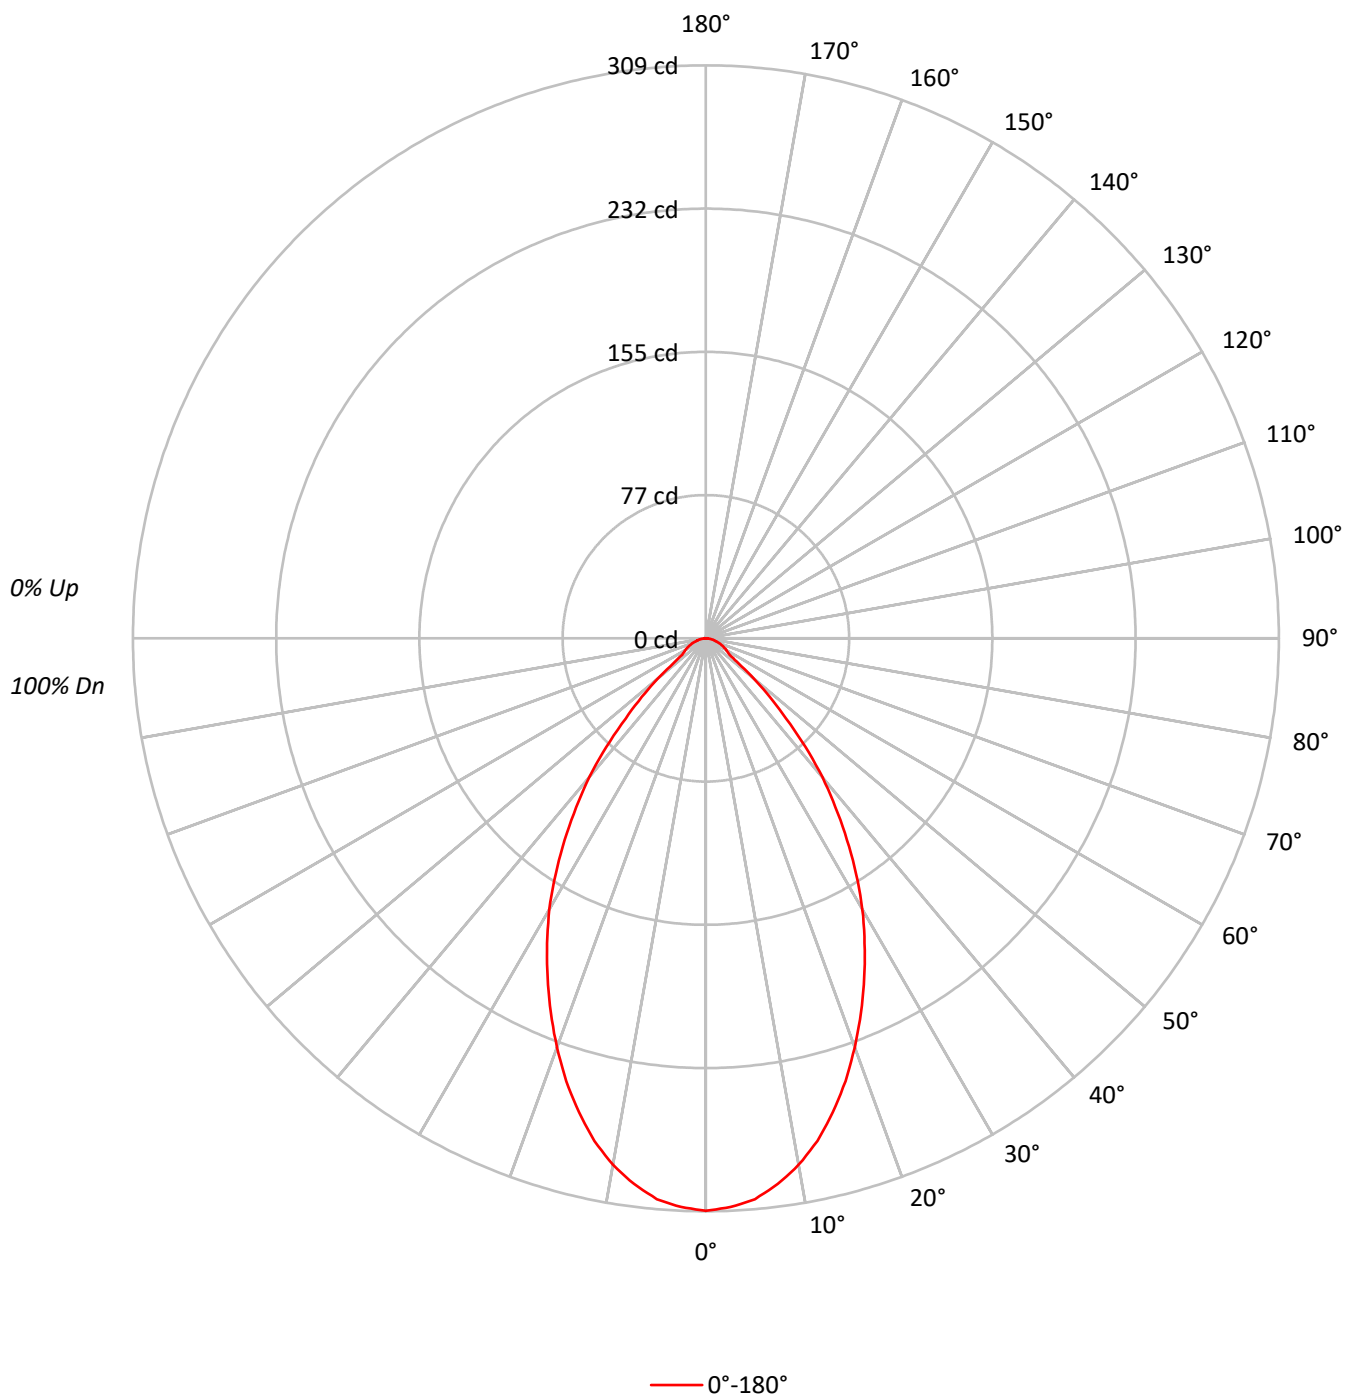

TEST NUMBER: P1282086

CATALOG NUMBER: P3AS05R55B2750DE010 E3DLD1MW_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98		99	97	95		95	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88		91	88	86		89	86	84	82
3	99	91	85	81	97	90	84	80	87	82	79		85	81	77		82	79	76	74
4	93	84	77	72	91	83	77	72	80	75	71		78	74	70		76	73	69	68
5	87	77	71	66	85	76	70	65	75	69	65		73	68	64		71	67	64	62
6	82	72	65	60	80	71	64	60	69	64	59		68	63	59		66	62	58	57
7	77	67	60	55	76	66	59	55	65	59	54		63	58	54		62	57	54	52
8	73	62	55	51	72	62	55	51	60	54	50		59	54	50		58	53	50	48
9	69	58	51	47	68	58	51	47	57	51	47		56	50	46		55	50	46	45
10	65	55	48	44	64	54	48	44	53	47	43		52	47	43		52	47	43	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	67692
5°	66828
10°	64194
15°	60046
20°	54768
25°	48874
30°	42741
35°	35523
40°	27995
45°	18979
50°	11599
55°	6002
60°	5614
65°	5292
70°	4937
75°	4321
80°	4293
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 18979 cd/sqm

TEST NUMBER: P1282086

CATALOG NUMBER: P3AS05R55B2750DE010 E3DLD1MW_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.5	7.9
10°-20°	73.9	20.5
20°-30°	92.6	25.7
30°-40°	82.6	23.0
40°-50°	48.4	13.4
50°-60°	16.7	4.6
60°-70°	10.1	2.8
70°-80°	5.6	1.6
80°-90°	1.6	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	195.0	54.1
0°-40°	277.6	77.1
0°-60°	342.7	95.2
0°-90°	360.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	360.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	309	
5°	304	28
15°	264	74
25°	202	93
35°	133	83
45°	61	48
55°	16	17
65°	10	10
75°	5	6
85°	1	2
90°	0	

TEST NUMBER: P1282086

CATALOG NUMBER: P3AS05R55B2750DE010 E3DLD1MW_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	308.7
2.5°	307.0
5°	303.6
7.5°	296.8
10°	288.3
12.5°	277.6
15°	264.5
17.5°	250.4
20°	234.7
22.5°	218.5
25°	202.0
27.5°	185.4
30°	168.8
32.5°	150.9
35°	132.7
37.5°	114.8
40°	97.8
42.5°	79.5
45°	61.2
47.5°	46.8
50°	34.0
52.5°	22.1
55°	15.7
57.5°	14.0
60°	12.8
62.5°	11.5
65°	10.2
67.5°	8.9
70°	7.7
72.5°	6.4
75°	5.1
77.5°	4.3
80°	3.4
82.5°	2.1
85°	1.3
87.5°	0.9
90°	0.0

(END OF REPORT)