

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1282431

Luminaire Tested: P3AS05R70B2750DE010 E3CB1MW\_5000K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1282431  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R70B2750DE010 E3CB1MW\_5000K  
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R70 optic, 5000K CCT AND, 80CRI , E3CB1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 532.0 lumens  
Efficiency: N/A  
Efficacy: 90.2 lumens/watt  
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1282431

CATALOG NUMBER: P3AS05R70B2750DE010 E3CB1MW\_5000K

### Luminous Intensity Polar Plot

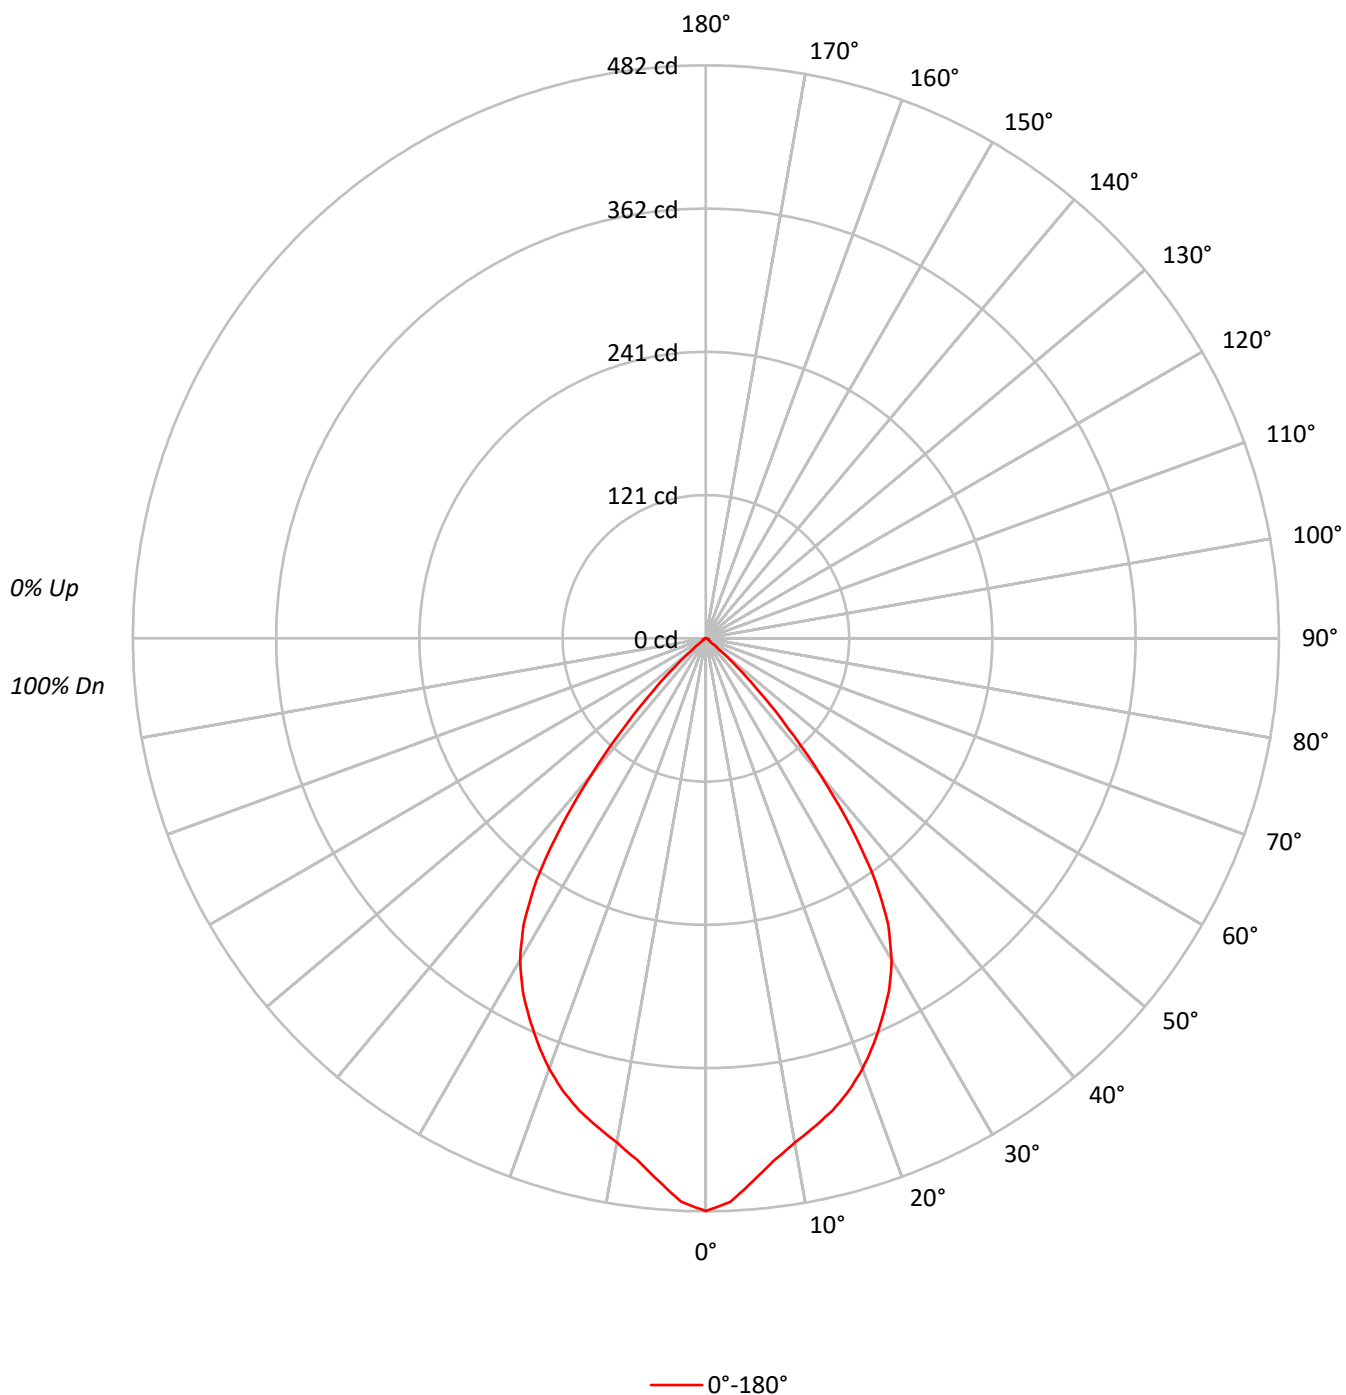

TEST NUMBER: P1282431

CATALOG NUMBER: P3AS05R70B2750DE010 E3CB1MW\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 |  | 100 | 99  | 97  |  | 97  |
| 2   | 107 | 102 | 97  | 94  | 105 | 100 | 96  | 93  | 97  | 94  | 91  |  | 94  | 91  | 89  |  | 91  |
| 3   | 101 | 94  | 89  | 85  | 99  | 93  | 88  | 84  | 90  | 86  | 83  |  | 88  | 84  | 81  |  | 85  |
| 4   | 95  | 87  | 81  | 77  | 94  | 86  | 81  | 76  | 84  | 79  | 75  |  | 82  | 78  | 75  |  | 80  |
| 5   | 90  | 81  | 75  | 70  | 88  | 80  | 74  | 70  | 78  | 73  | 69  |  | 77  | 72  | 69  |  | 75  |
| 6   | 85  | 75  | 69  | 64  | 83  | 75  | 69  | 64  | 73  | 68  | 64  |  | 72  | 67  | 63  |  | 70  |
| 7   | 80  | 70  | 64  | 59  | 79  | 70  | 64  | 59  | 68  | 63  | 59  |  | 67  | 62  | 59  |  | 66  |
| 8   | 76  | 66  | 59  | 55  | 75  | 65  | 59  | 55  | 64  | 58  | 55  |  | 63  | 58  | 54  |  | 62  |
| 9   | 72  | 62  | 55  | 51  | 71  | 61  | 55  | 51  | 60  | 55  | 51  |  | 59  | 54  | 50  |  | 58  |
| 10  | 68  | 58  | 52  | 47  | 67  | 57  | 51  | 47  | 56  | 51  | 47  |  | 56  | 51  | 47  |  | 55  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 105649 |
| 5°  | 100792 |
| 10° | 95901  |
| 15° | 93349  |
| 20° | 89888  |
| 25° | 85069  |
| 30° | 79126  |
| 35° | 66468  |
| 40° | 42852  |
| 45° | 19909  |
| 50° | 5219   |
| 55° | 1300   |
| 60° | 1316   |
| 65° | 1090   |
| 70° | 1090   |
| 75° | 1101   |
| 80° | 1137   |
| 85° | 1006   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 19909 cd/sqm

TEST NUMBER: P1282431

CATALOG NUMBER: P3AS05R70B2750DE010 E3CB1MW\_5000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 42.9   | 8.1       |
| 10°-20°   | 115.5  | 21.7      |
| 20°-30°   | 161.4  | 30.3      |
| 30°-40°   | 149.7  | 28.1      |
| 40°-50°   | 53.6   | 10.1      |
| 50°-60°   | 4.6    | 0.9       |
| 60°-70°   | 2.3    | 0.4       |
| 70°-80°   | 1.5    | 0.3       |
| 80°-90°   | 0.6    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 319.8  | 60.1      |
| 0°-40°    | 469.5  | 88.2      |
| 0°-60°    | 527.7  | 99.2      |
| 0°-90°    | 532.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 532.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 482 |      |
| 5°  | 458 | 43   |
| 15° | 411 | 116  |
| 25° | 352 | 161  |
| 35° | 248 | 150  |
| 45° | 64  | 54   |
| 55° | 3   | 5    |
| 65° | 2   | 2    |
| 75° | 1   | 1    |
| 85° | 0   | 1    |
| 90° | 0   |      |

TEST NUMBER: P1282431

CATALOG NUMBER: P3AS05R70B2750DE010 E3CB1MW\_5000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 481.8 |
| 2.5°  | 474.5 |
| 5°    | 457.9 |
| 7.5°  | 442.6 |
| 10°   | 430.7 |
| 12.5° | 421.0 |
| 15°   | 411.2 |
| 17.5° | 399.3 |
| 20°   | 385.2 |
| 22.5° | 369.1 |
| 25°   | 351.6 |
| 27.5° | 333.8 |
| 30°   | 312.5 |
| 32.5° | 285.3 |
| 35°   | 248.3 |
| 37.5° | 201.1 |
| 40°   | 149.7 |
| 42.5° | 102.0 |
| 45°   | 64.2  |
| 47.5° | 35.7  |
| 50°   | 15.3  |
| 52.5° | 5.1   |
| 55°   | 3.4   |
| 57.5° | 3.0   |
| 60°   | 3.0   |
| 62.5° | 2.6   |
| 65°   | 2.1   |
| 67.5° | 2.1   |
| 70°   | 1.7   |
| 72.5° | 1.7   |
| 75°   | 1.3   |
| 77.5° | 1.3   |
| 80°   | 0.9   |
| 82.5° | 0.9   |
| 85°   | 0.4   |
| 87.5° | 0.4   |
| 90°   | 0.0   |

(END OF REPORT)