

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1282621

Luminaire Tested: P3AS09R15B2750DE010 E3DL1WH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1282621
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R15B2750DE010 E3DL1WH_5000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R15 optic, 5000K CCT AND, 80CRI , E3DL1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 386.0 lumens
Efficiency: N/A
Efficacy: 29.5 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1282621

CATALOG NUMBER: P3AS09R15B2750DE010 E3DL1WH_5000K

Luminous Intensity Polar Plot

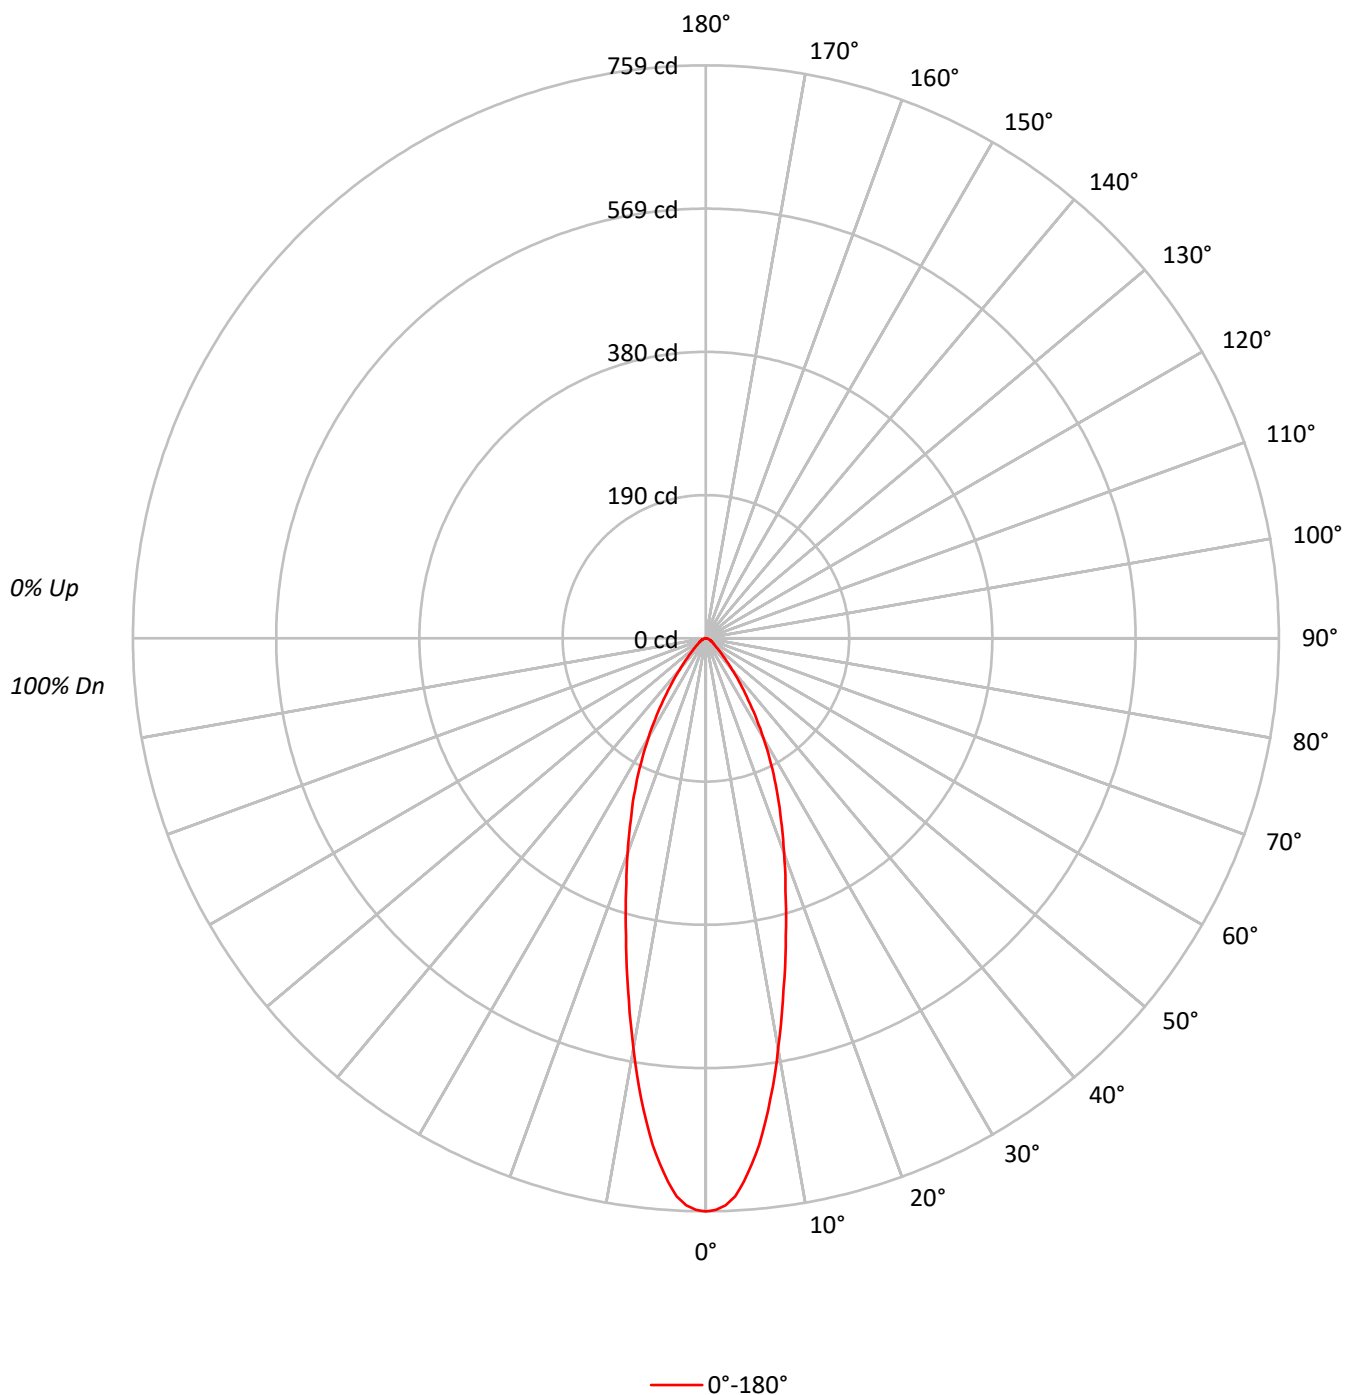

TEST NUMBER: P1282621

CATALOG NUMBER: P3AS09R15B2750DE010 E3DL1WH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	108	106		111	108	106	104		104	102	101		100	99	98		97	96	95
2	108	103	98	95		105	101	97	94		98	95	92		95	92	90		92	90	88
3	102	96	91	87		100	94	90	86		92	88	85		89	86	83		87	84	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	93	84	78	74		91	83	78	74		81	77	73		80	76	72		78	75	72
6	88	79	73	69		87	79	73	69		77	72	69		76	71	68		74	71	68
7	84	75	69	65		83	74	69	65		73	68	64		72	67	64		71	67	64
8	80	71	65	61		79	71	65	61		69	64	61		68	64	61		67	63	60
9	77	68	62	58		76	67	62	58		66	61	58		65	61	57		64	60	57
10	74	64	59	55		73	64	59	55		63	58	55		62	58	55		62	57	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	166456
5°	153841
10°	122821
15°	92781
20°	70659
25°	53834
30°	38563
35°	25163
40°	15429
45°	9334
50°	6209
55°	4779
60°	4122
65°	3580
70°	3206
75°	3219
80°	2399
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 9334 cd/sqm

TEST NUMBER: P1282621

CATALOG NUMBER: P3AS09R15B2750DE010 E3DL1WH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.9	16.0
10°-20°	114.2	29.6
20°-30°	101.7	26.3
30°-40°	60.2	15.6
40°-50°	24.7	6.4
50°-60°	11.6	3.0
60°-70°	7.0	1.8
70°-80°	3.7	1.0
80°-90°	0.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	277.8	72.0
0°-40°	338.0	87.6
0°-60°	374.3	97.0
0°-90°	386.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	386.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	759	
5°	699	62
15°	409	114
25°	222	102
35°	94	60
45°	30	25
55°	12	12
65°	7	7
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1282621

CATALOG NUMBER: P3AS09R15B2750DE010 E3DL1WH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	759.1
1°	757.2
2°	751.6
3°	740.3
4°	721.5
5°	698.9
6°	674.5
7°	645.6
8°	615.5
9°	584.8
10°	551.6
12.5°	475.8
15°	408.7
17.5°	351.0
20°	302.8
22.5°	260.1
25°	222.5
27.5°	186.2
30°	152.3
32.5°	121.6
35°	94.0
37.5°	72.1
40°	53.9
42.5°	40.1
45°	30.1
47.5°	23.2
50°	18.2
52.5°	15.0
55°	12.5
57.5°	10.7
60°	9.4
62.5°	8.1
65°	6.9
67.5°	6.3
70°	5.0
72.5°	4.4
75°	3.8
77.5°	2.5
80°	1.9
82.5°	1.3
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)