

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1282807

Luminaire Tested: P3AS09R20B2750DE010 E3DLD1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1282807
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R20B2750DE010 E3DLD1WMH_2700K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R20 optic, 2700K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 461.0 lumens
Efficiency: N/A
Efficacy: 35.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1282807

CATALOG NUMBER: P3AS09R20B2750DE010 E3DLD1WMH_2700K

Luminous Intensity Polar Plot

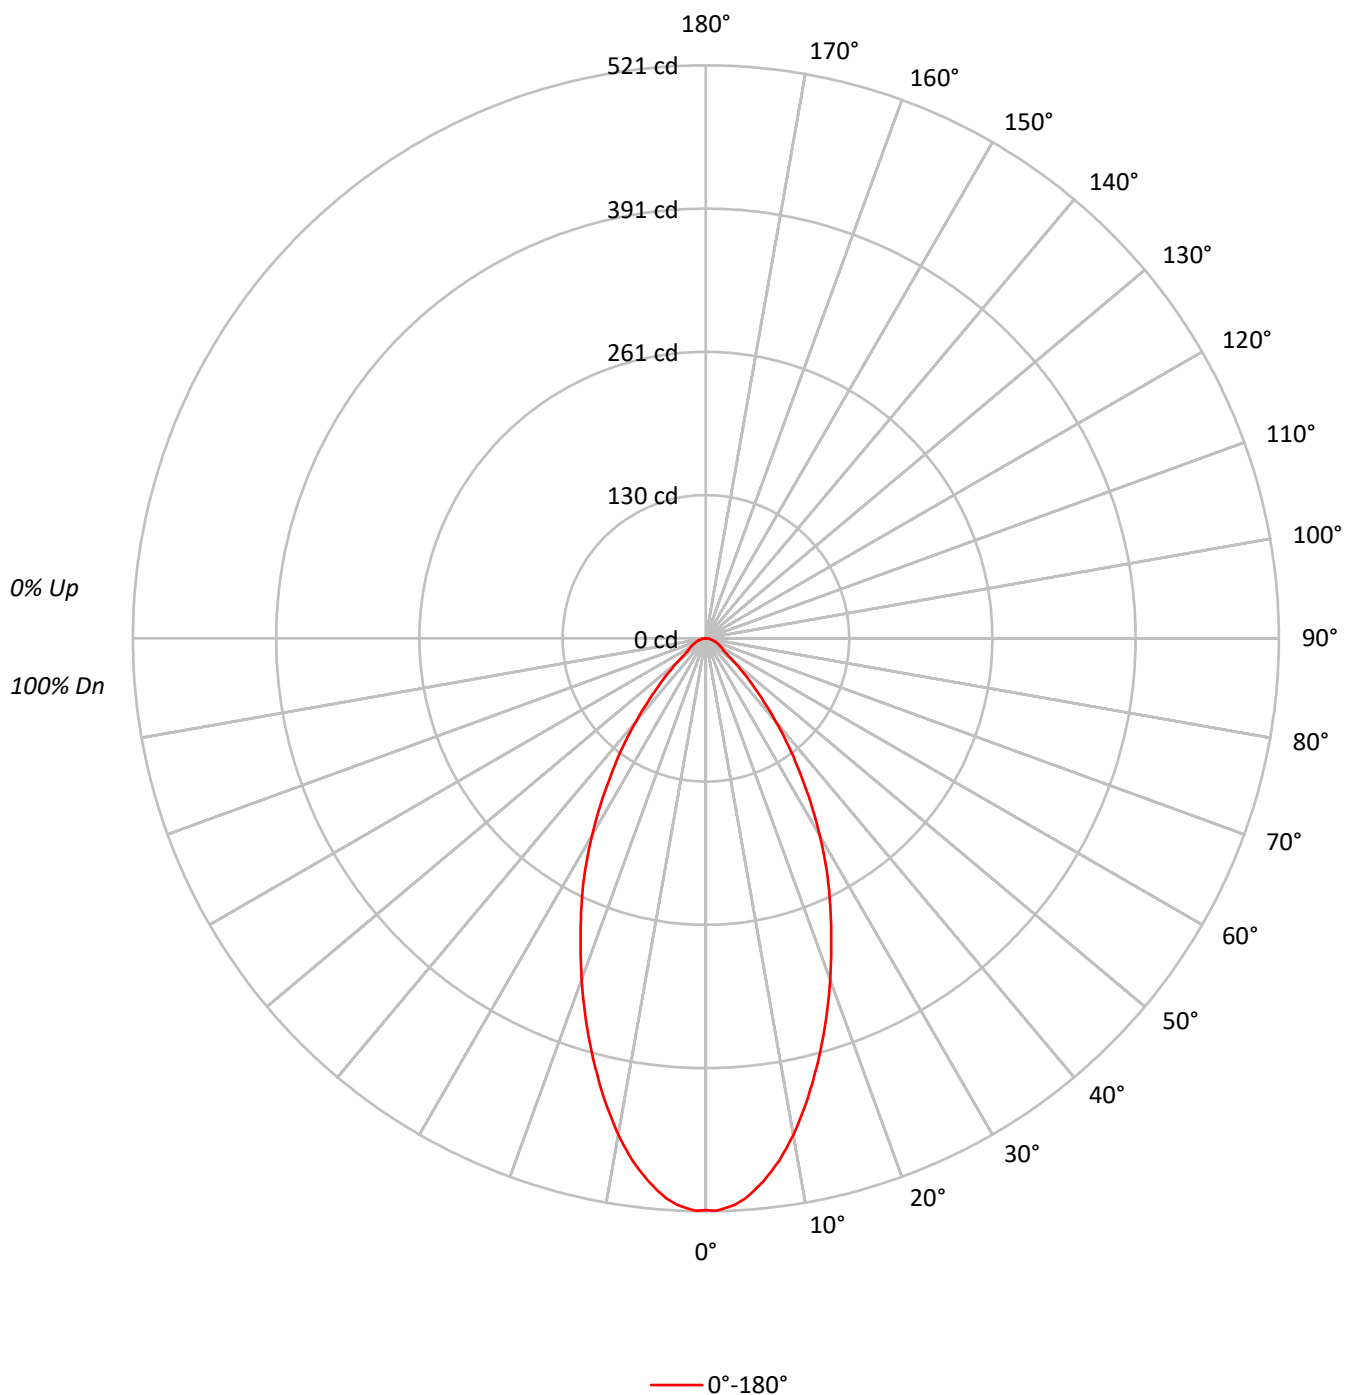

TEST NUMBER: P1282807

CATALOG NUMBER: P3AS09R20B2750DE010 E3DLD1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	86	79	75	92	85	79	74	82	77	73		80	76	72		78
5	89	80	73	68	87	79	73	68	77	71	67		75	70	67		73
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61
9	72	61	55	50	70	61	55	50	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		56	50	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	114026
5°	110984
10°	102091
15°	89876
20°	77077
25°	64746
30°	52337
35°	39806
40°	28339
45°	18700
50°	11599
55°	7608
60°	6929
65°	6382
70°	6027
75°	5422
80°	5177
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18700 cd/sqm

TEST NUMBER: P1282807

CATALOG NUMBER: P3AS09R20B2750DE010 E3DLD1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.6	10.1
10°-20°	110.2	23.9
20°-30°	122.3	26.5
30°-40°	93.3	20.2
40°-50°	47.8	10.4
50°-60°	19.6	4.3
60°-70°	12.2	2.7
70°-80°	6.9	1.5
80°-90°	2.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	279.2	60.6
0°-40°	372.5	80.8
0°-60°	439.9	95.4
0°-90°	461.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	461.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	520	
5°	504	47
15°	396	110
25°	268	122
35°	149	93
45°	60	48
55°	20	20
65°	12	12
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1282807

CATALOG NUMBER: P3AS09R20B2750DE010 E3DLD1WMH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	520.0
1°	520.6
2°	518.3
3°	515.3
4°	510.6
5°	504.2
6°	496.6
7°	488.4
8°	479.6
9°	469.1
10°	458.5
12.5°	428.1
15°	395.9
17.5°	363.1
20°	330.3
22.5°	297.5
25°	267.6
27.5°	237.8
30°	206.7
32.5°	177.4
35°	148.7
37.5°	123.6
40°	99.0
42.5°	77.9
45°	60.3
47.5°	45.7
50°	34.0
52.5°	25.2
55°	19.9
57.5°	18.2
60°	15.8
62.5°	14.1
65°	12.3
67.5°	10.5
70°	9.4
72.5°	7.6
75°	6.4
77.5°	5.3
80°	4.1
82.5°	2.9
85°	1.8
87.5°	0.6
90°	0.0

(END OF REPORT)