

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283000

Luminaire Tested: P3AS09R30B2750DE010 E3CB1MMS_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1283000
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R30B2750DE010 E3CB1MMS_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R30 optic, 4000K CCT AND, 80CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 747.0 lumens
Efficiency: N/A
Efficacy: 57.0 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1283000

CATALOG NUMBER: P3AS09R30B2750DE010 E3CB1MMS_4000K

Luminous Intensity Polar Plot

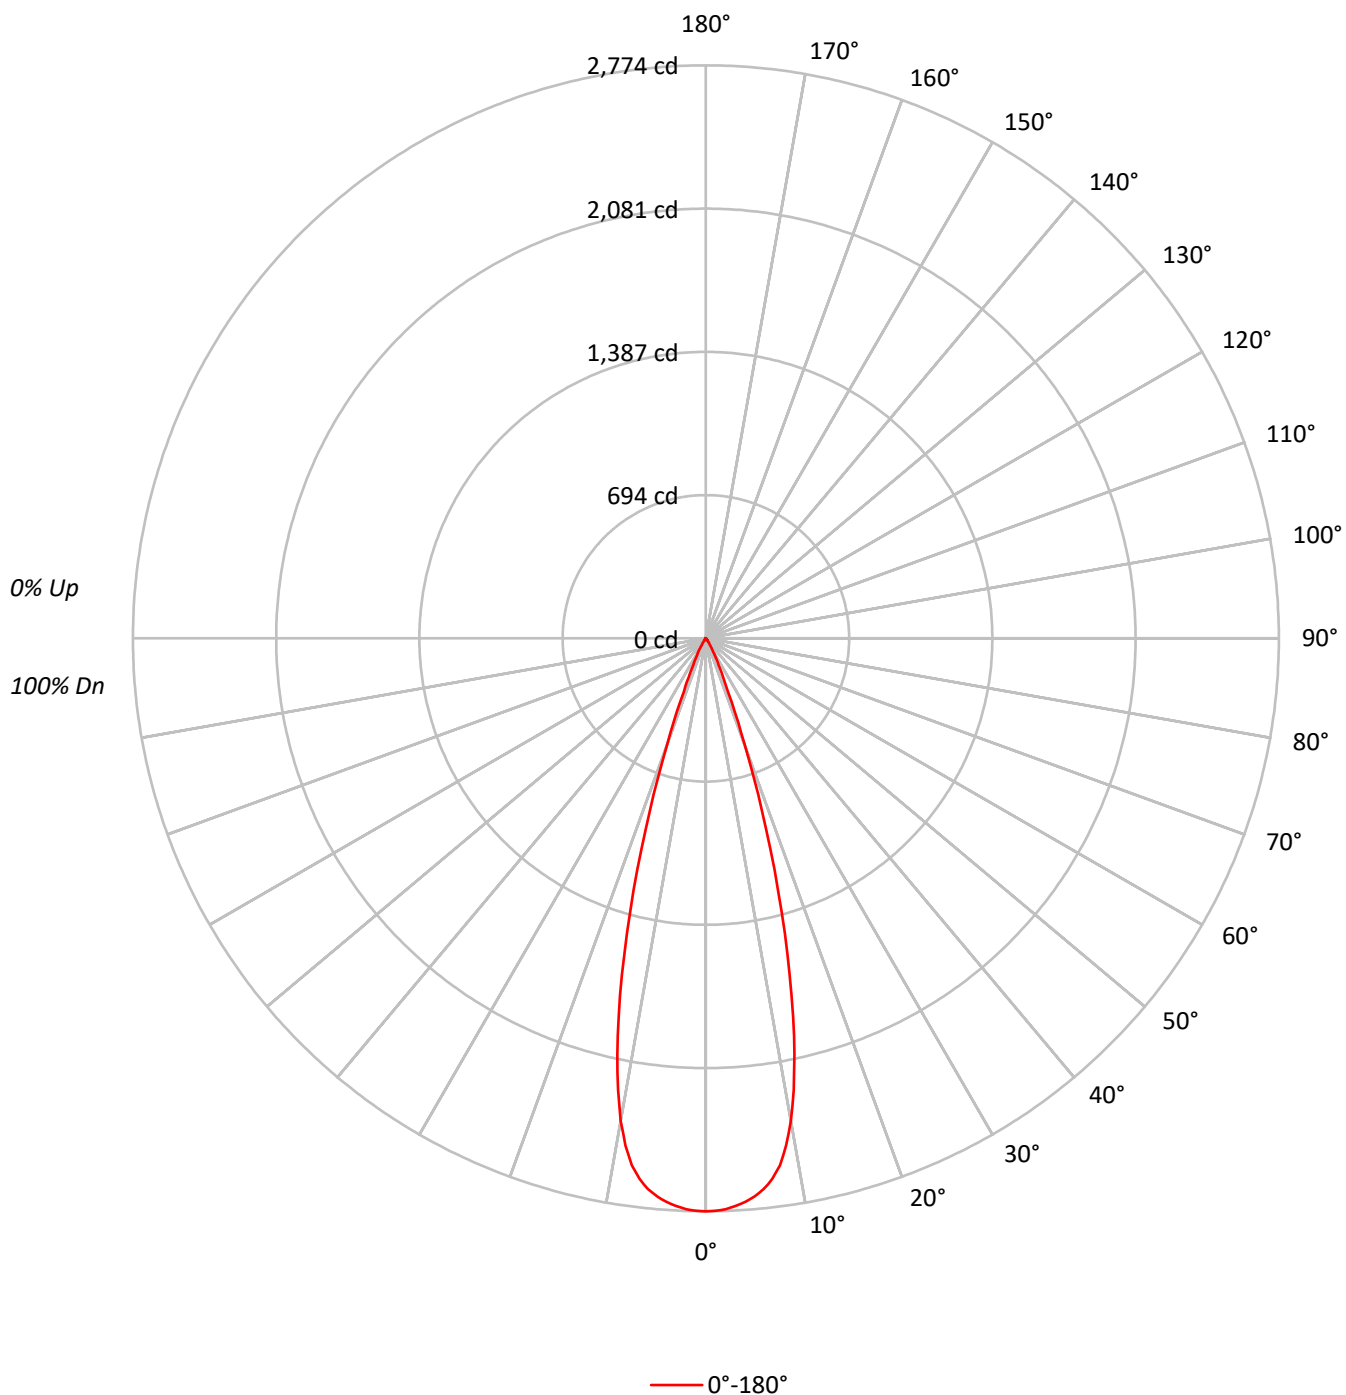

TEST NUMBER: P1283000

CATALOG NUMBER: P3AS09R30B2750DE010 E3CB1MMS_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	93	92
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	91	90	89
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	88	87	86
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	86	85	84
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	83	82	81
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	80	79
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	78	77
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	76	75	74
10	89	83	79	76	88	82	78	76	82	78	76	81	78	76	80	77	75	74	73	72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	608307
5°	596807
10°	528336
15°	334735
20°	127061
25°	37623
30°	14863
35°	4551
40°	2004
45°	713
50°	614
55°	459
60°	526
65°	623
70°	385
75°	508
80°	758
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 758 cd/sqm

TEST NUMBER: P1283000

CATALOG NUMBER: P3AS09R30B2750DE010 E3CB1MMS_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	249.2	33.4
10°-20°	388.4	52.0
20°-30°	90.2	12.1
30°-40°	14.0	1.9
40°-50°	2.4	0.3
50°-60°	1.1	0.2
60°-70°	1.0	0.1
70°-80°	0.6	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	727.9	97.4
0°-40°	741.8	99.3
0°-60°	745.4	99.8
0°-90°	747.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	747.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2774	
5°	2711	249
15°	1474	388
25°	156	90
35°	17	14
45°	2	2
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1283000

CATALOG NUMBER: P3AS09R30B2750DE010 E3CB1MMS_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2774.1
1°	2772.4
2°	2764.7
3°	2751.8
4°	2735.4
5°	2711.3
6°	2681.4
7°	2636.8
8°	2575.8
9°	2486.0
10°	2372.8
11°	2226.7
12°	2061.8
13°	1878.7
14°	1677.5
15°	1474.5
17.5°	964.6
20°	544.5
22.5°	278.1
25°	155.5
27.5°	95.6
30°	58.7
32.5°	31.7
35°	17.0
37.5°	11.1
40°	7.0
42.5°	4.1
45°	2.3
47.5°	1.8
50°	1.8
52.5°	1.2
55°	1.2
57.5°	1.2
60°	1.2
62.5°	1.2
65°	1.2
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1283000

CATALOG NUMBER: P3AS09R30B2750DE010 E3CB1MMS_4000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)