

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283014

Luminaire Tested: P3AS09R30B2750DE010 E3CD1MMS_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1283014
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R30B2750DE010 E3CD1MMS_3500K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R30 optic, 3500K CCT AND, 80CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 753.0 lumens
Efficiency: N/A
Efficacy: 57.5 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1283014

CATALOG NUMBER: P3AS09R30B2750DE010 E3CD1MMS_3500K

Luminous Intensity Polar Plot

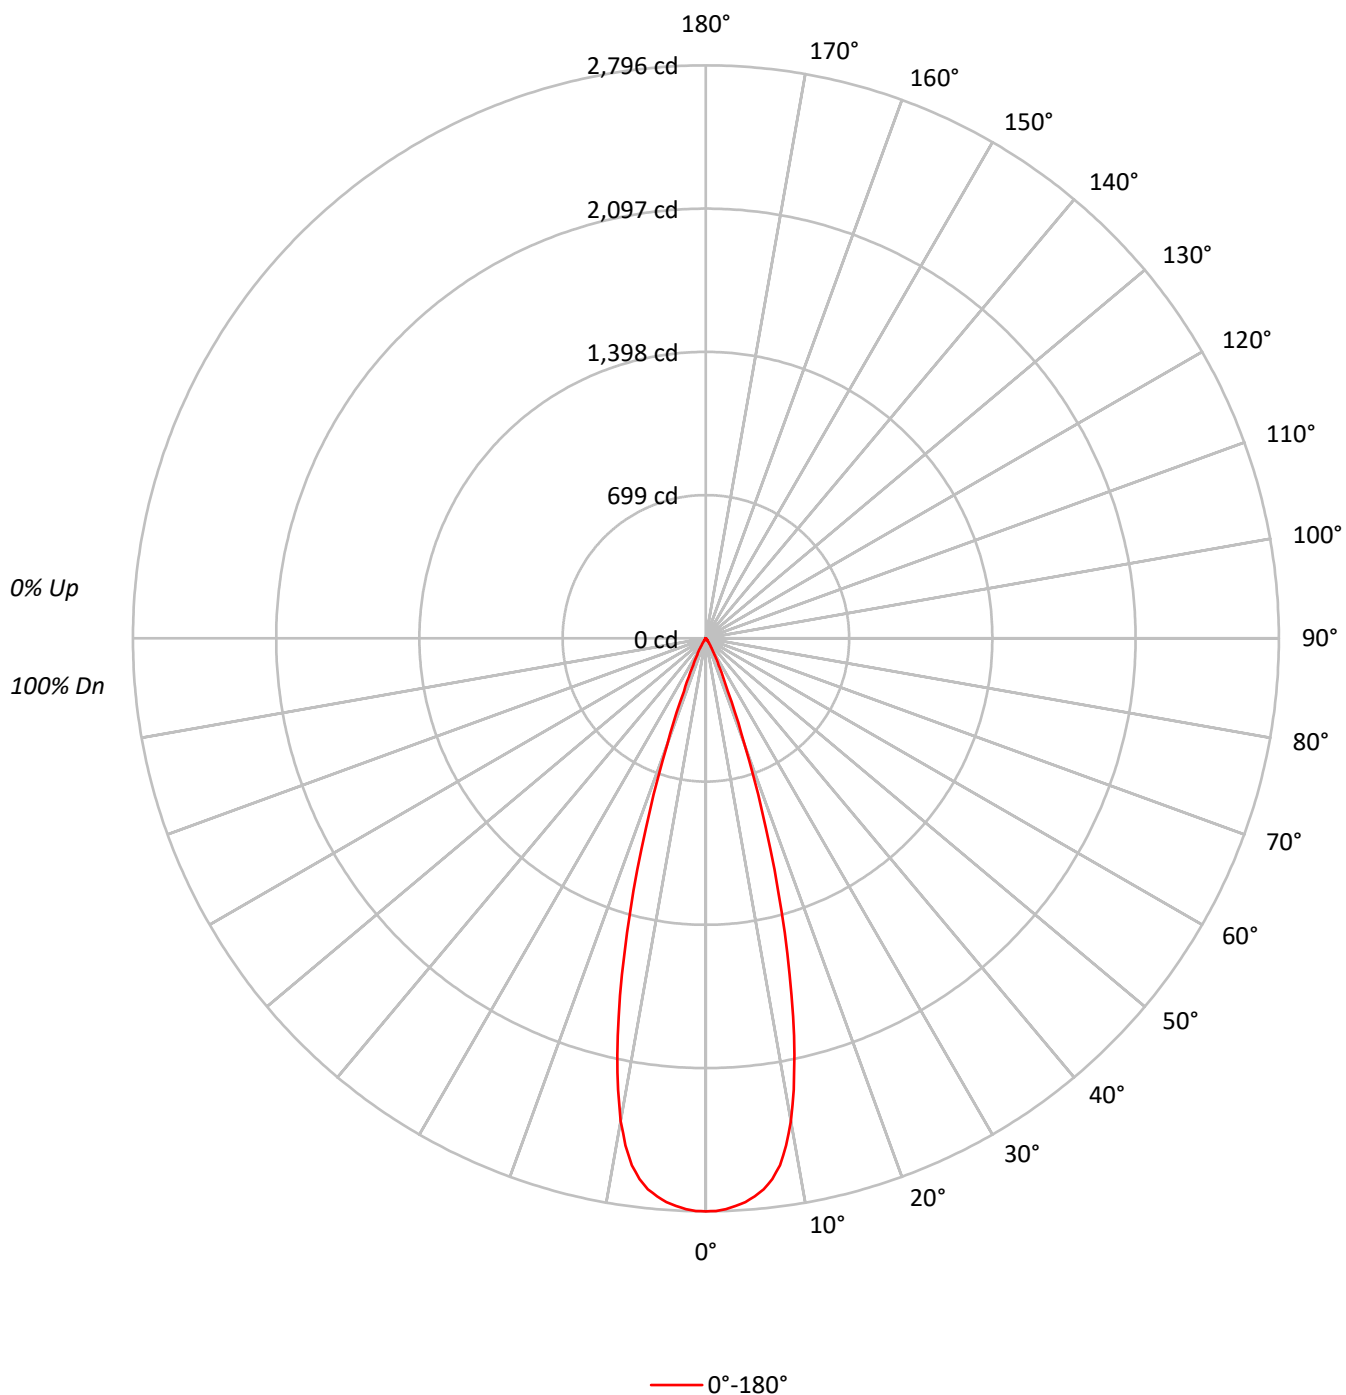

TEST NUMBER: P1283014

CATALOG NUMBER: P3AS09R30B2750DE010 E3CD1MMS_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0								0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10		0				0								0
RCR																																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102		100				100								100
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100	99	98		97				97								97
2	111	108	105	102	109	106	104	101	103	101	99		100	99	97		98	96	95		94				94								94
3	108	103	100	97	106	102	99	96	100	97	95		97	95	93		95	94	92		91				91								91
4	105	100	96	93	103	99	95	92	97	94	91		95	92	90		93	91	89		88				88								88
5	102	96	92	89	100	95	91	89	94	90	88		92	89	87		91	88	87		85				85								85
6	99	93	89	86	98	92	88	86	91	88	85		90	87	85		89	86	84		83				83								83
7	96	90	86	83	95	89	86	83	88	85	82		87	84	82		86	84	82		81				81								81
8	94	87	83	81	93	87	83	80	86	83	80		85	82	80		84	82	80		79				79								79
9	91	85	81	78	90	84	81	78	84	80	78		83	80	78		82	79	77		77				77								77
10	89	83	79	76	88	82	78	76	82	78	76		81	78	76		80	77	75		75				75								75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	613196
5°	601605
10°	532566
15°	337414
20°	128088
25°	37913
30°	14964
35°	4604
40°	2032
45°	744
50°	614
55°	459
60°	526
65°	623
70°	385
75°	508
80°	758
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 758 cd/sqm

TEST NUMBER: P1283014

CATALOG NUMBER: P3AS09R30B2750DE010 E3CD1MMS_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	251.2	33.4
10°-20°	391.6	52.0
20°-30°	90.9	12.1
30°-40°	14.1	1.9
40°-50°	2.4	0.3
50°-60°	1.1	0.2
60°-70°	1.0	0.1
70°-80°	0.6	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	733.7	97.4
0°-40°	747.8	99.3
0°-60°	751.4	99.8
0°-90°	753.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	753.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2796	
5°	2733	251
15°	1486	392
25°	157	91
35°	17	14
45°	2	2
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1283014

CATALOG NUMBER: P3AS09R30B2750DE010 E3CD1MMS_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2796.4
1°	2794.6
2°	2786.9
3°	2773.9
4°	2757.4
5°	2733.1
6°	2702.9
7°	2658.0
8°	2596.5
9°	2506.0
10°	2391.8
11°	2244.6
12°	2078.4
13°	1893.8
14°	1691.0
15°	1486.3
17.5°	972.4
20°	548.9
22.5°	280.3
25°	156.7
27.5°	96.4
30°	59.1
32.5°	31.9
35°	17.2
37.5°	11.2
40°	7.1
42.5°	4.1
45°	2.4
47.5°	1.8
50°	1.8
52.5°	1.2
55°	1.2
57.5°	1.2
60°	1.2
62.5°	1.2
65°	1.2
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1283014

CATALOG NUMBER: P3AS09R30B2750DE010 E3CD1MMS_3500K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)