

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283143

Luminaire Tested: P3AS09R30B2750DE010 E3PHLD1MW_3000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1283143
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R30B2750DE010 E3PHLD1MW_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R30 optic, 3000K CCT AND, 90CRI , E3PHLD1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 449.0 lumens
Efficiency: N/A
Efficacy: 34.3 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1283143
CATALOG NUMBER: P3AS09R30B2750DE010 E3PHLD1MW_3000K

Luminous Intensity Polar Plot

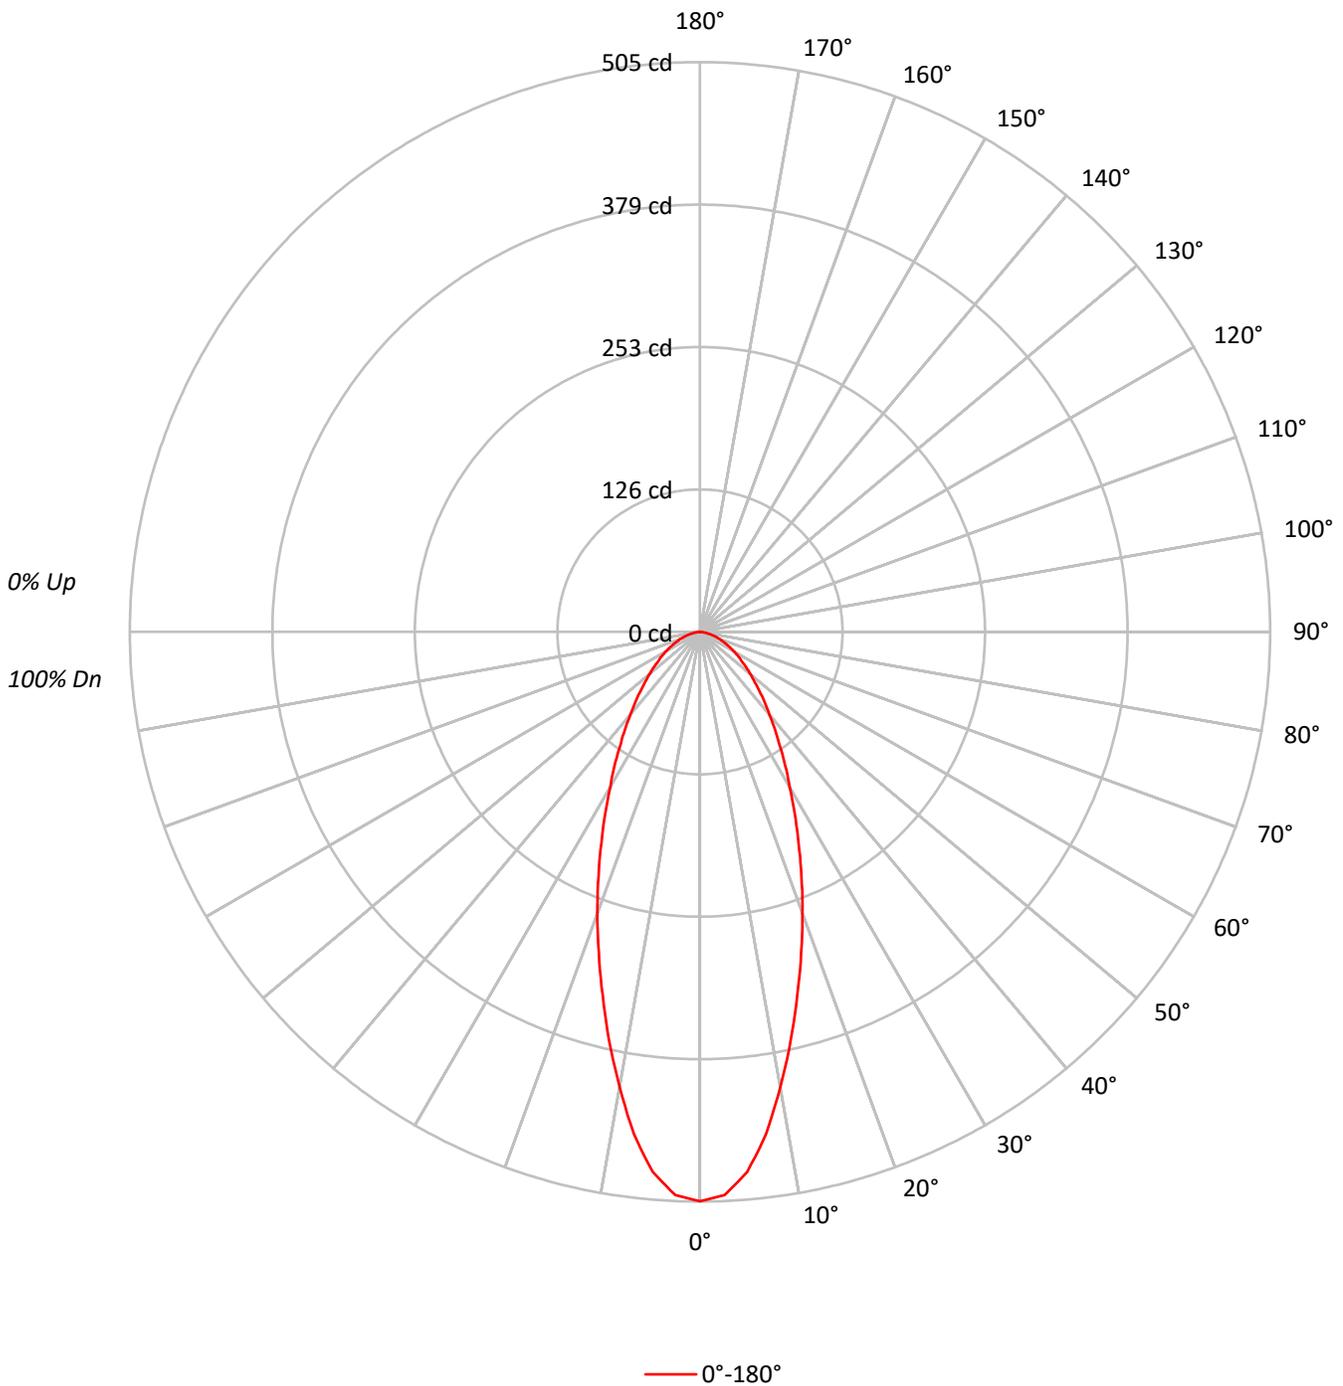



TEST NUMBER: P1283143
 CATALOG NUMBER: P3AS09R30B2750DE010 E3PHLD1MW_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99 | 97 | 98 | 96 | 94 | 94 | 93 | 91 | 90 |
| 2 | 104 | 98 | 93 | 88 | 102 | 96 | 91 | 87 | 93 | 89 | 85 | 90 | 86 | 83 | 87 | 84 | 82 | 80 |
| 3 | 97 | 89 | 83 | 78 | 95 | 88 | 82 | 77 | 85 | 80 | 76 | 82 | 78 | 75 | 80 | 76 | 73 | 71 |
| 4 | 91 | 82 | 75 | 69 | 89 | 80 | 74 | 69 | 78 | 72 | 68 | 76 | 71 | 67 | 74 | 70 | 66 | 65 |
| 5 | 85 | 75 | 68 | 63 | 84 | 74 | 67 | 62 | 72 | 66 | 62 | 70 | 65 | 61 | 69 | 64 | 61 | 59 |
| 6 | 80 | 69 | 62 | 57 | 79 | 69 | 62 | 57 | 67 | 61 | 56 | 65 | 60 | 56 | 64 | 59 | 56 | 54 |
| 7 | 76 | 65 | 57 | 52 | 74 | 64 | 57 | 52 | 62 | 56 | 52 | 61 | 56 | 52 | 60 | 55 | 51 | 50 |
| 8 | 71 | 60 | 53 | 48 | 70 | 60 | 53 | 48 | 58 | 52 | 48 | 57 | 52 | 48 | 56 | 51 | 48 | 46 |
| 9 | 68 | 57 | 50 | 45 | 66 | 56 | 49 | 45 | 55 | 49 | 45 | 54 | 49 | 45 | 53 | 48 | 44 | 43 |
| 10 | 64 | 53 | 47 | 42 | 63 | 53 | 46 | 42 | 52 | 46 | 42 | 51 | 46 | 42 | 50 | 45 | 42 | 40 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 110649 |
| 5° | 105745 |
| 10° | 91203 |
| 15° | 75596 |
| 20° | 61979 |
| 25° | 49963 |
| 30° | 40259 |
| 35° | 32980 |
| 40° | 27394 |
| 45° | 23227 |
| 50° | 19888 |
| 55° | 17204 |
| 60° | 15350 |
| 65° | 13387 |
| 70° | 11733 |
| 75° | 9913 |
| 80° | 7324 |
| 85° | 4277 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23227 cd/sqm



TEST NUMBER: P1283143

CATALOG NUMBER: P3AS09R30B2750DE010 E3PHLD1MW_3000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 43.6 | 9.7 |
| 10°-20° | 92.9 | 20.7 |
| 20°-30° | 95.2 | 21.2 |
| 30°-40° | 77.8 | 17.3 |
| 40°-50° | 58.2 | 13.0 |
| 50°-60° | 40.9 | 9.1 |
| 60°-70° | 25.7 | 5.7 |
| 70°-80° | 12.4 | 2.8 |
| 80°-90° | 2.4 | 0.5 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 231.6 | 51.6 |
| 0°-40° | 309.4 | 68.9 |
| 0°-60° | 408.5 | 91.0 |
| 0°-90° | 449.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 449.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 505 | |
| 5° | 480 | 44 |
| 15° | 333 | 93 |
| 25° | 206 | 95 |
| 35° | 123 | 78 |
| 45° | 75 | 58 |
| 55° | 45 | 41 |
| 65° | 26 | 26 |
| 75° | 12 | 12 |
| 85° | 2 | 2 |
| 90° | 0 | |



TEST NUMBER: P1283143
CATALOG NUMBER: P3AS09R30B2750DE010 E3PHLD1MW_3000K

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 504.6 |
| 2.5° | 499.6 |
| 5° | 480.4 |
| 7.5° | 448.8 |
| 10° | 409.6 |
| 12.5° | 371.3 |
| 15° | 333.0 |
| 17.5° | 298.1 |
| 20° | 265.6 |
| 22.5° | 234.8 |
| 25° | 206.5 |
| 27.5° | 181.5 |
| 30° | 159.0 |
| 32.5° | 140.7 |
| 35° | 123.2 |
| 37.5° | 109.1 |
| 40° | 95.7 |
| 42.5° | 84.9 |
| 45° | 74.9 |
| 47.5° | 65.8 |
| 50° | 58.3 |
| 52.5° | 51.6 |
| 55° | 45.0 |
| 57.5° | 40.0 |
| 60° | 35.0 |
| 62.5° | 30.0 |
| 65° | 25.8 |
| 67.5° | 21.6 |
| 70° | 18.3 |
| 72.5° | 15.0 |
| 75° | 11.7 |
| 77.5° | 8.3 |
| 80° | 5.8 |
| 82.5° | 3.3 |
| 85° | 1.7 |
| 87.5° | 0.8 |
| 90° | 0.0 |

(END OF REPORT)