

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283235

Luminaire Tested: P3AS09R35B2750DE010 E3DLD1MW_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1283235
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R35B2750DE010 E3DLD1MW_4000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R35 optic, 4000K CCT AND, 80CRI , E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 475.0 lumens
Efficiency: N/A
Efficacy: 36.3 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1283235

CATALOG NUMBER: P3AS09R35B2750DE010 E3DLD1MW_4000K

Luminous Intensity Polar Plot

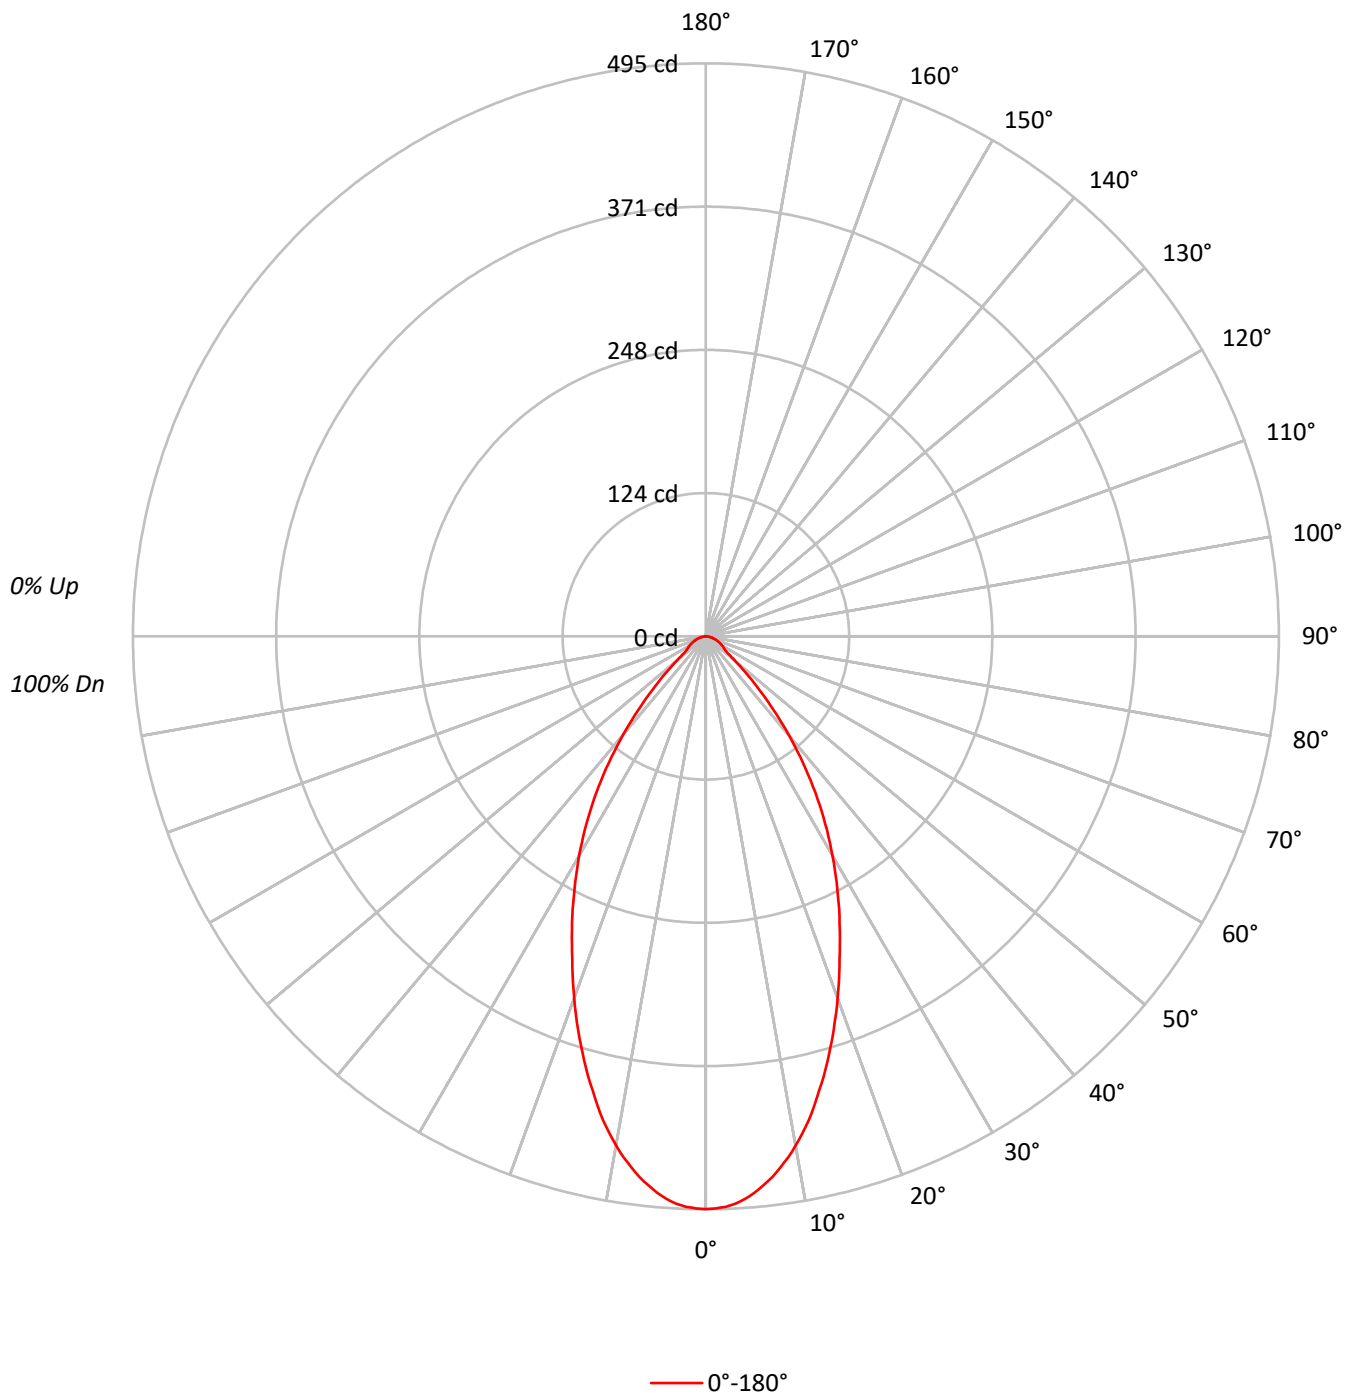

TEST NUMBER: P1283235

CATALOG NUMBER: P3AS09R35B2750DE010 E3DLD1MW_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96	94	93	91
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89	87	85	83
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83	80	78	76
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78	74	71	69
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68	64	61	59
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64	60	56	55
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61	56	52	51
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57	52	49	48
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54	49	46	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	108500
5°	106207
10°	99464
15°	89285
20°	77660
25°	66173
30°	55426
35°	44142
40°	31917
45°	20219
50°	11019
55°	7646
60°	7192
65°	6693
70°	6411
75°	5507
80°	5177
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 20219 cd/sqm

TEST NUMBER: P1283235

CATALOG NUMBER: P3AS09R35B2750DE010 E3DLD1MW_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.9	9.5
10°-20°	109.4	23.0
20°-30°	125.4	26.4
30°-40°	102.3	21.5
40°-50°	51.6	10.9
50°-60°	19.2	4.0
60°-70°	12.9	2.7
70°-80°	7.1	1.5
80°-90°	2.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	279.7	58.9
0°-40°	382.1	80.4
0°-60°	452.9	95.3
0°-90°	475.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	475.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	495	
5°	482	45
15°	393	109
25°	274	125
35°	165	102
45°	65	52
55°	20	19
65°	13	13
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1283235

CATALOG NUMBER: P3AS09R35B2750DE010 E3DLD1MW_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	494.8
1°	494.2
2°	493.1
3°	490.7
4°	487.2
5°	482.5
6°	476.6
7°	470.8
8°	463.1
9°	455.5
10°	446.7
11°	437.3
12°	427.3
13°	416.2
14°	404.4
15°	393.3
17.5°	363.3
20°	332.8
22.5°	301.7
25°	273.5
27.5°	245.9
30°	218.9
32.5°	191.9
35°	164.9
37.5°	137.9
40°	111.5
42.5°	86.9
45°	65.2
47.5°	47.0
50°	32.3
52.5°	23.5
55°	20.0
57.5°	18.2
60°	16.4
62.5°	14.7
65°	12.9
67.5°	11.2
70°	10.0
72.5°	8.2
75°	6.5
77.5°	5.3
80°	4.1
82.5°	2.9
85°	1.8
87.5°	1.2



TEST NUMBER: P1283235

CATALOG NUMBER: P3AS09R35B2750DE010 E3DLD1MW_4000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)