

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1283408

Luminaire Tested: P3AS09R40B2750DE010 E3DLP1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1283408
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R40B2750DE010 E3DLP1GPH_3000K
Description: 3in Adjustable Boosted Cyan Tunable White LED luminaire with, R40 optic, 3000K CCT AND, 90CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 208.0 lumens
Efficiency: N/A
Efficacy: 15.9 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 13.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1283408
CATALOG NUMBER: P3AS09R40B2750DE010 E3DLP1GPH_3000K

Luminous Intensity Polar Plot

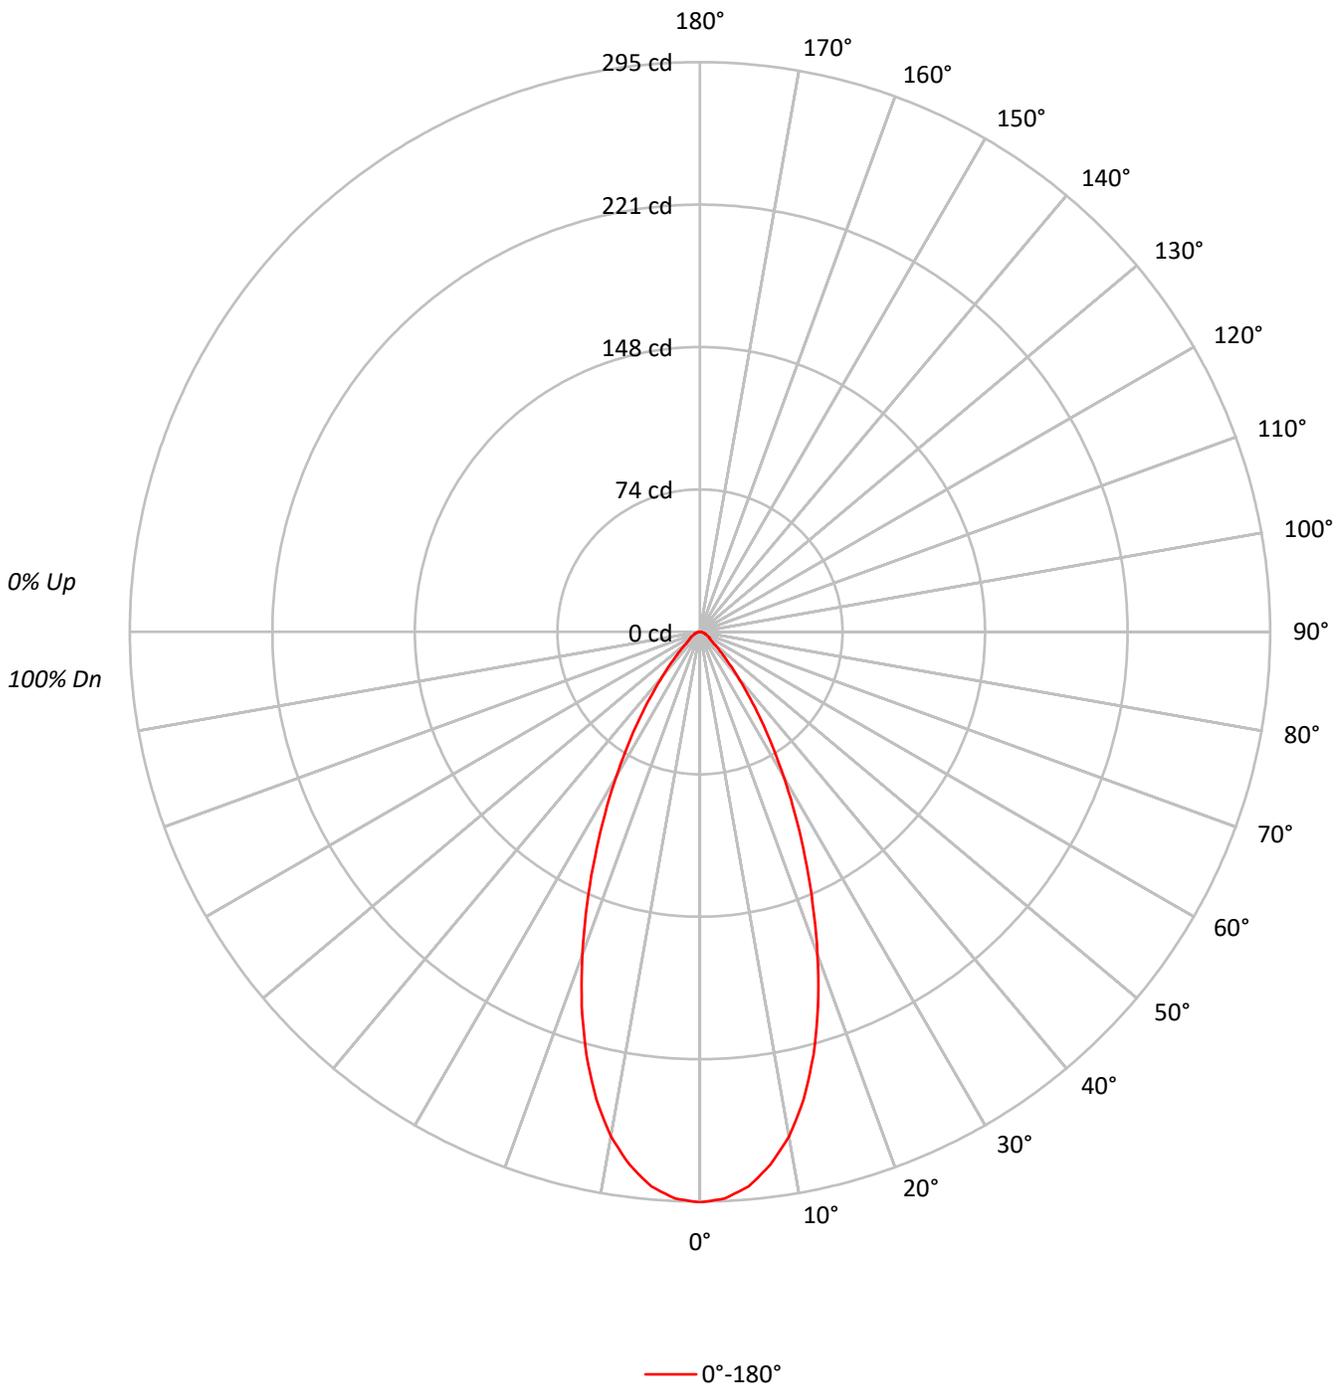



TEST NUMBER: P1283408
 CATALOG NUMBER: P3AS09R40B2750DE010 E3DLP1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	91	94	92	89	92	89	88	86	86	86	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80	80	80	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74	74	74	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69	69	69	69
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65	65	65	65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	62	61	61	61	61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51	51	51	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	64776
5°	63460
10°	59073
15°	51487
20°	41490
25°	31115
30°	21877
35°	14322
40°	8673
45°	5179
50°	3104
55°	2485
60°	2237
65°	1920
70°	1795
75°	1440
80°	1389
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5179 cd/sqm



TEST NUMBER: P1283408
 CATALOG NUMBER: P3AS09R40B2750DE010 E3DLP1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	26.8	12.9
10°-20°	62.5	30.0
20°-30°	58.9	28.3
30°-40°	34.0	16.4
40°-50°	13.6	6.5
50°-60°	6.0	2.9
60°-70°	3.7	1.8
70°-80°	1.9	0.9
80°-90°	0.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	148.1	71.2
0°-40°	182.2	87.6
0°-60°	201.8	97.0
0°-90°	208.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	208.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	295	
5°	288	27
15°	227	62
25°	129	59
35°	54	34
45°	17	14
55°	6	6
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1283408
CATALOG NUMBER: P3AS09R40B2750DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	295.4
2.5°	293.7
5°	288.3
7.5°	278.4
10°	265.3
12.5°	247.8
15°	226.8
17.5°	203.3
20°	177.8
22.5°	152.4
25°	128.6
27.5°	106.5
30°	86.4
32.5°	68.8
35°	53.5
37.5°	40.5
40°	30.3
42.5°	22.7
45°	16.7
47.5°	12.2
50°	9.1
52.5°	7.4
55°	6.5
57.5°	5.9
60°	5.1
62.5°	4.2
65°	3.7
67.5°	3.1
70°	2.8
72.5°	2.3
75°	1.7
77.5°	1.4
80°	1.1
82.5°	0.8
85°	0.6
87.5°	0.3
90°	0.0

(END OF REPORT)